

x

x

|        |          |          |
|--------|----------|----------|
| $\leq$ | $\Omega$ | $\Omega$ |
| $\leq$ | $\Omega$ | $\Omega$ |



|  |   |   |   |  |
|--|---|---|---|--|
|  |   |   |   |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  |   |   | ± |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  |   |   |   |  |
|  | ≤ | θ |   |  |
|  |   |   |   |  |
|  |   |   |   |  |



|  |  |                      |  |  |   |   |
|--|--|----------------------|--|--|---|---|
|  |  |                      |  |  |   |   |
|  |  | μ                    |  |  |   |   |
|  |  |                      |  |  |   | μ |
|  |  |                      |  |  | ± |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   | Ω |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   | Ω |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  | Ω                  Ω |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |
|  |  |                      |  |  |   |   |

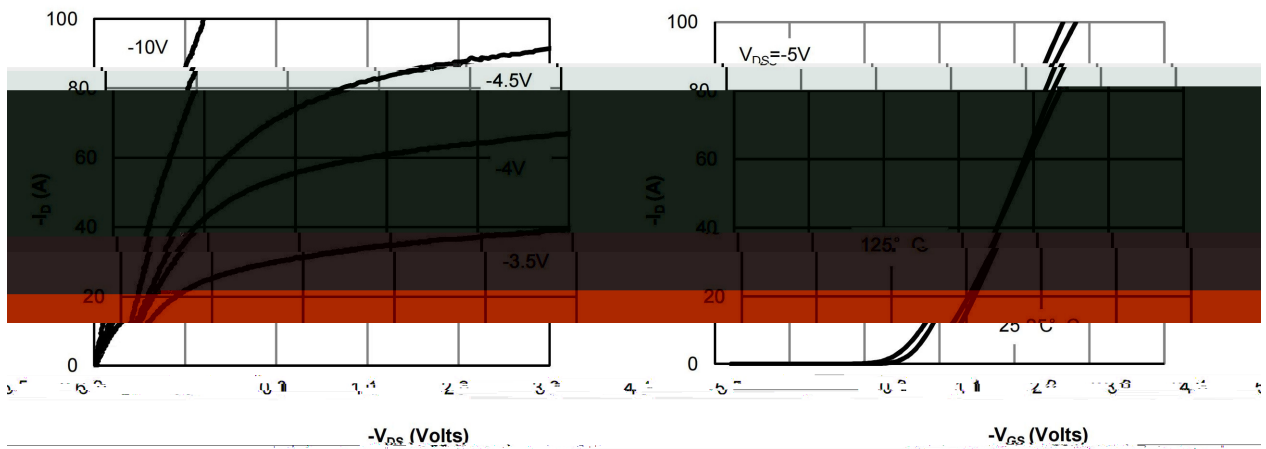


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

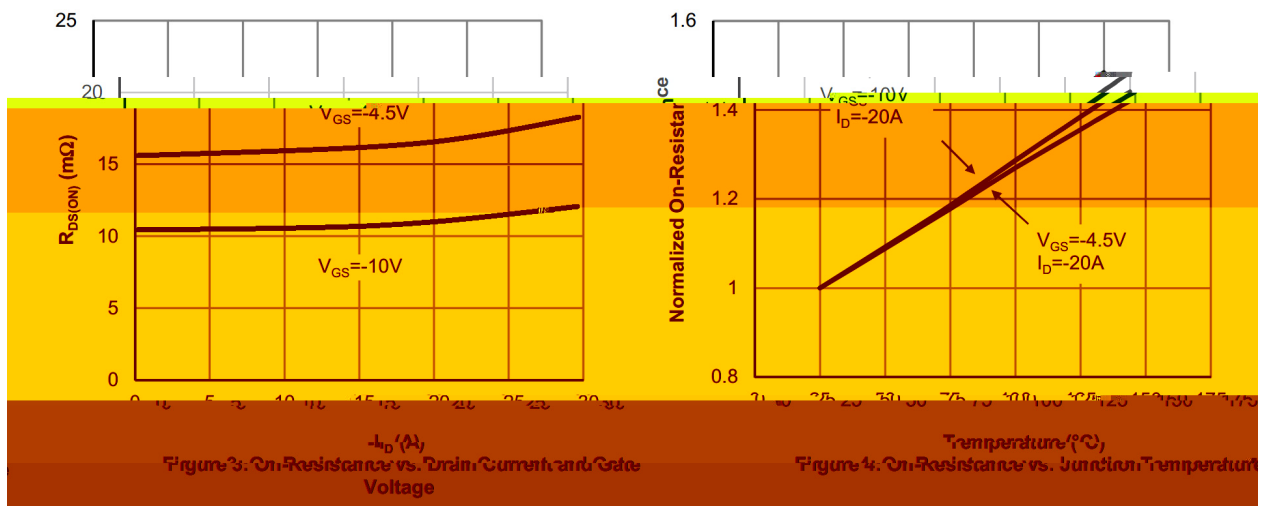


Figure 3: On-Resistance vs. Drain Current

Figure 4: Normalized On-Resistance vs. Drain Current




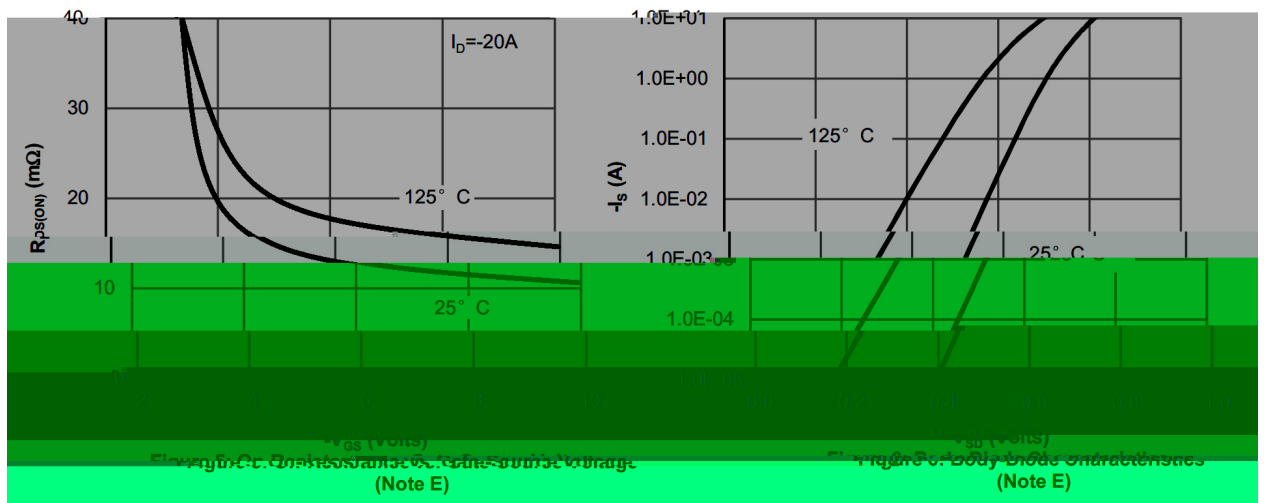



Figure 5: On-Resistance vs. Drain Current (Note E)

Figure 6: On-Resistance vs. Drain Current (Note E)

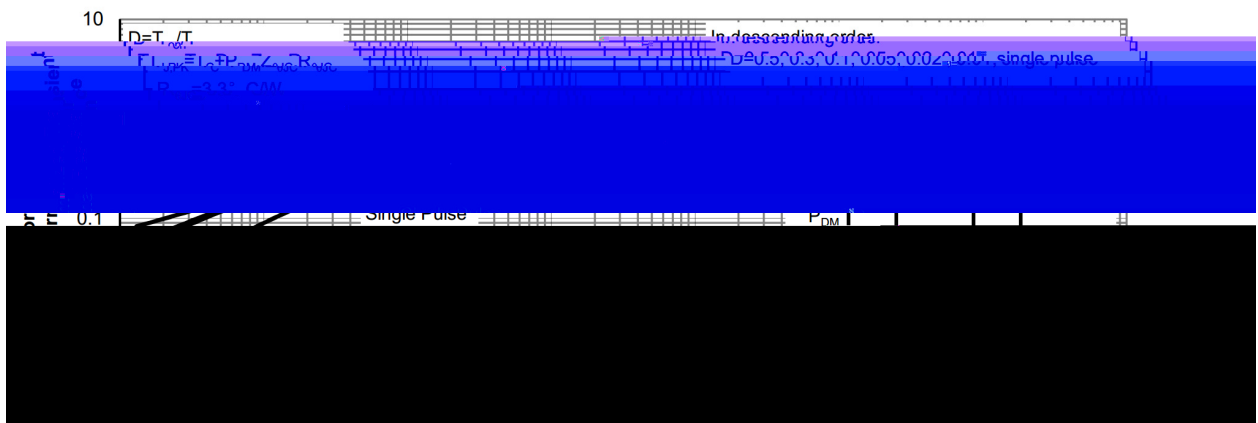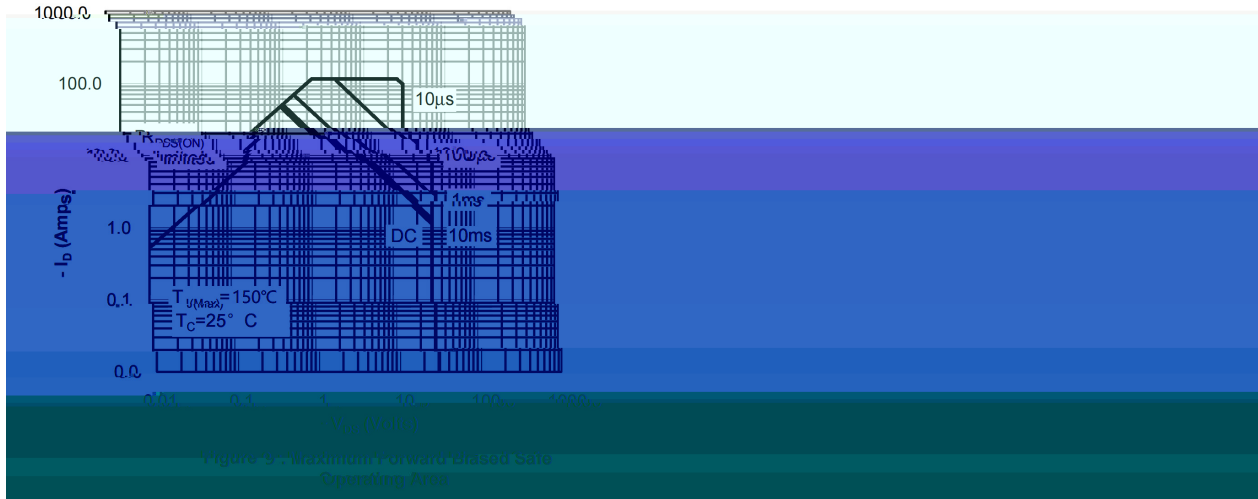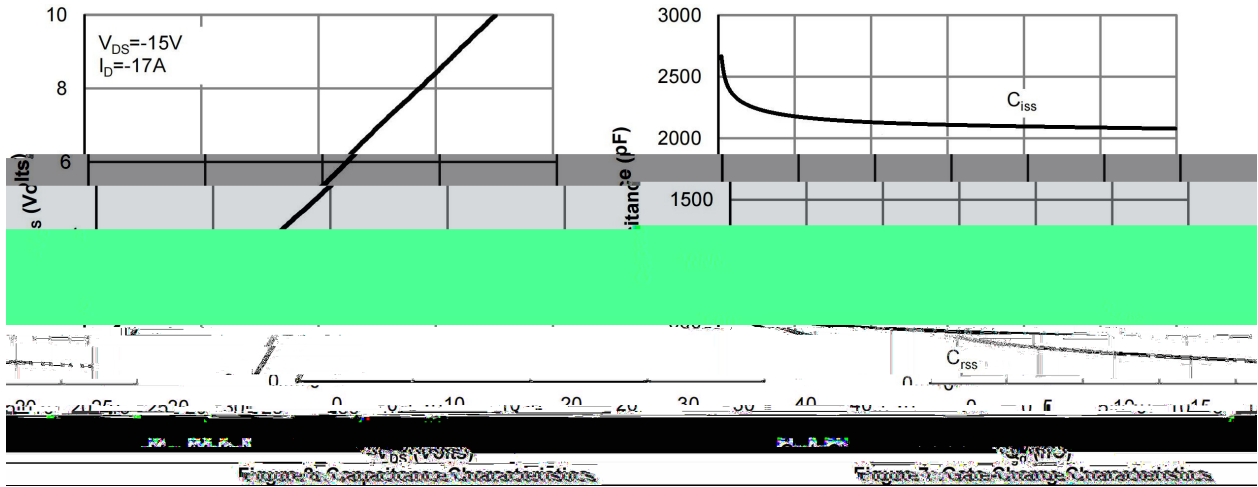


PDFN5 X6

Unit:mm

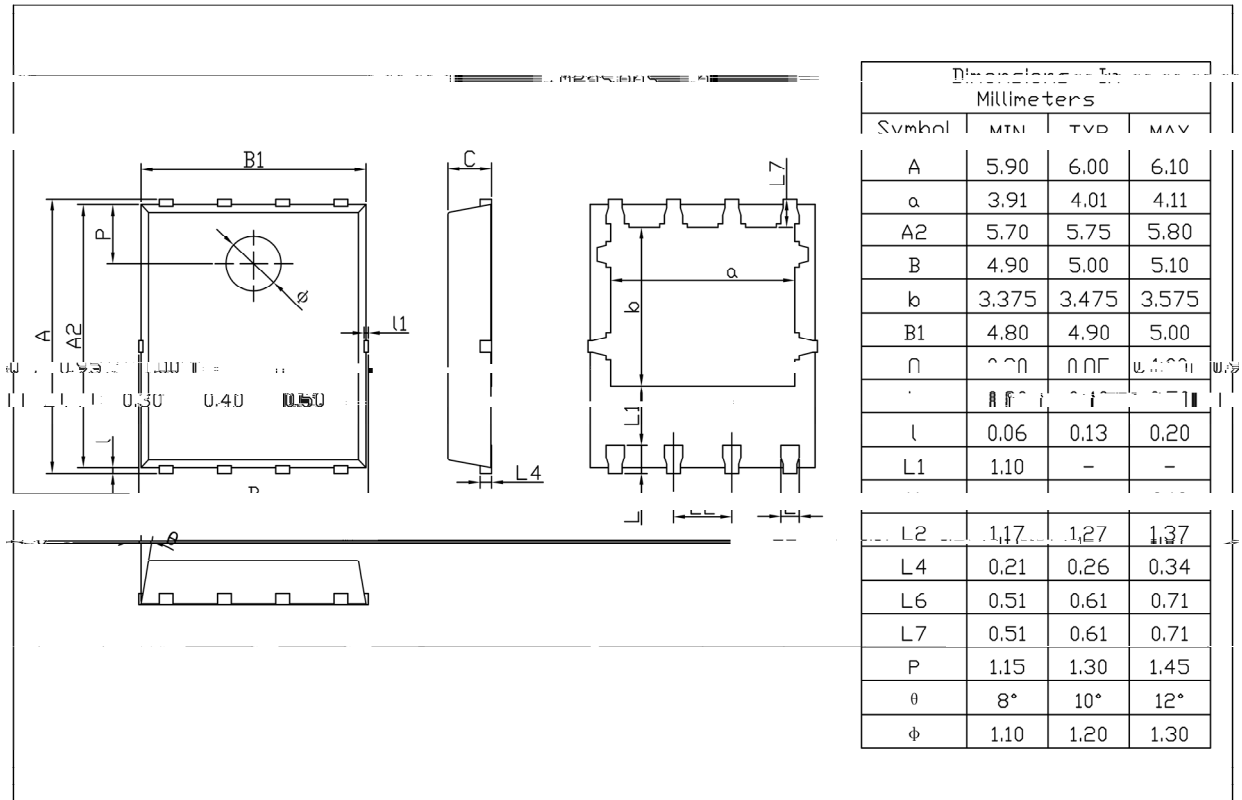

Rev.01 202209

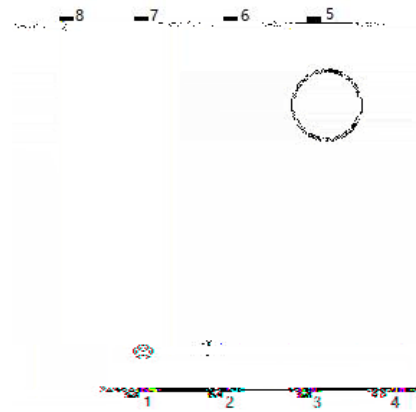

Temperature Profile for IR Reflow Soldering(Pb-Free)

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |

±

±

±

±

±

±

/

/

/

/