

[illegible]

/ Descriptions

P


/ Features

AEC-Q101

/ Applications

DC/DC

/ Equivalent Circuit




/ Pinning



/ Marking

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

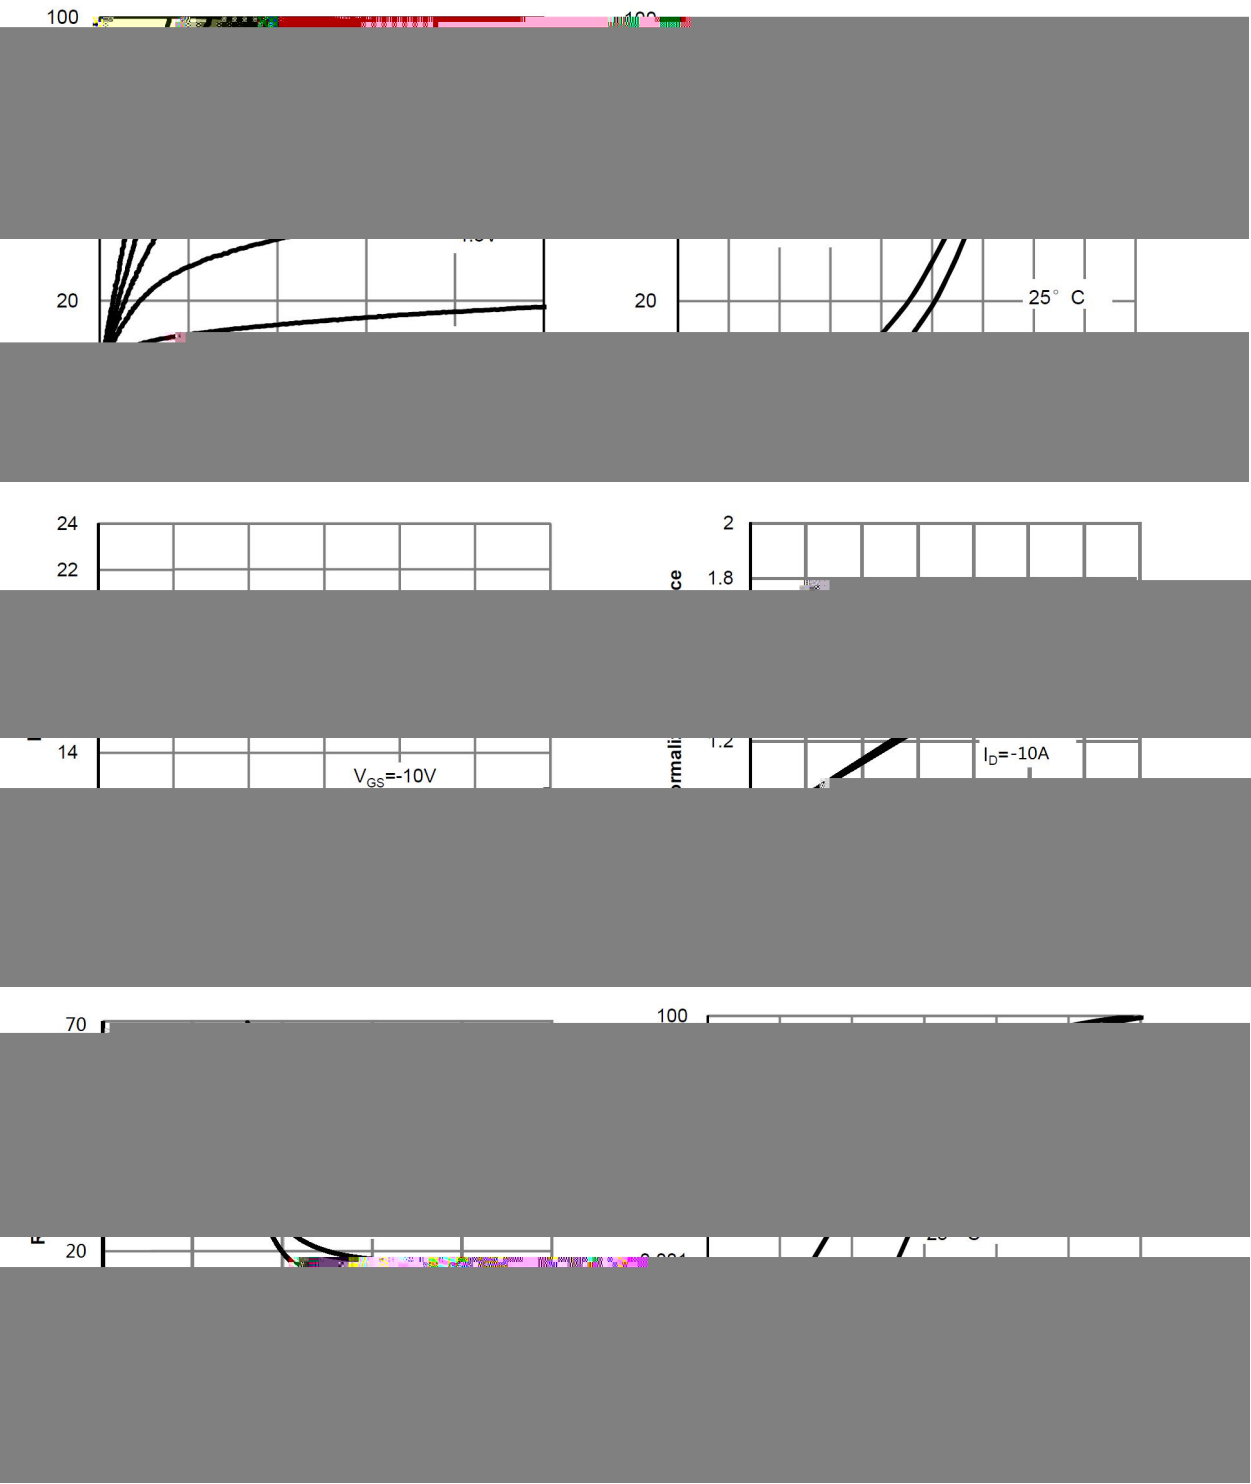

/ Electrical Characteristic Curve




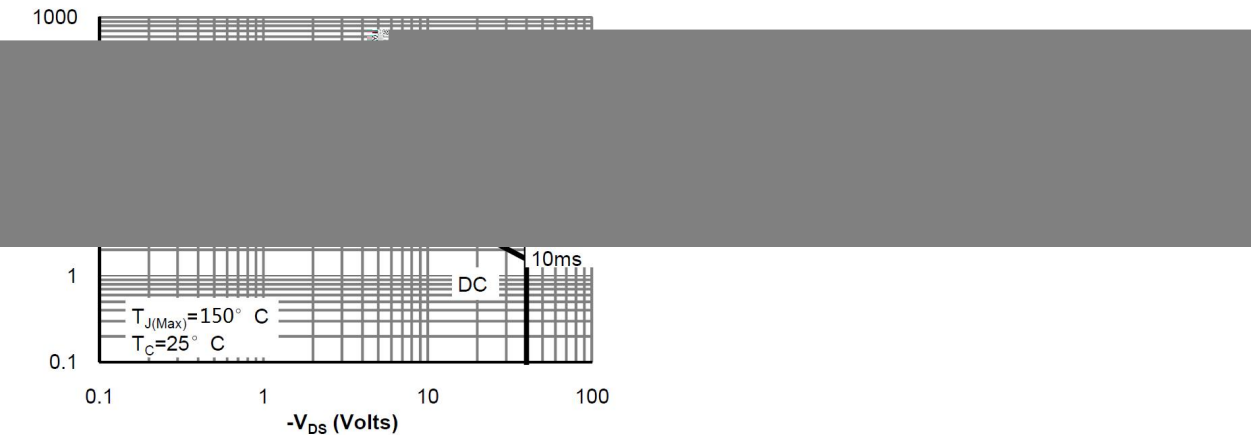


Figure 9: Maximum Forward Biased Safe Operating Area

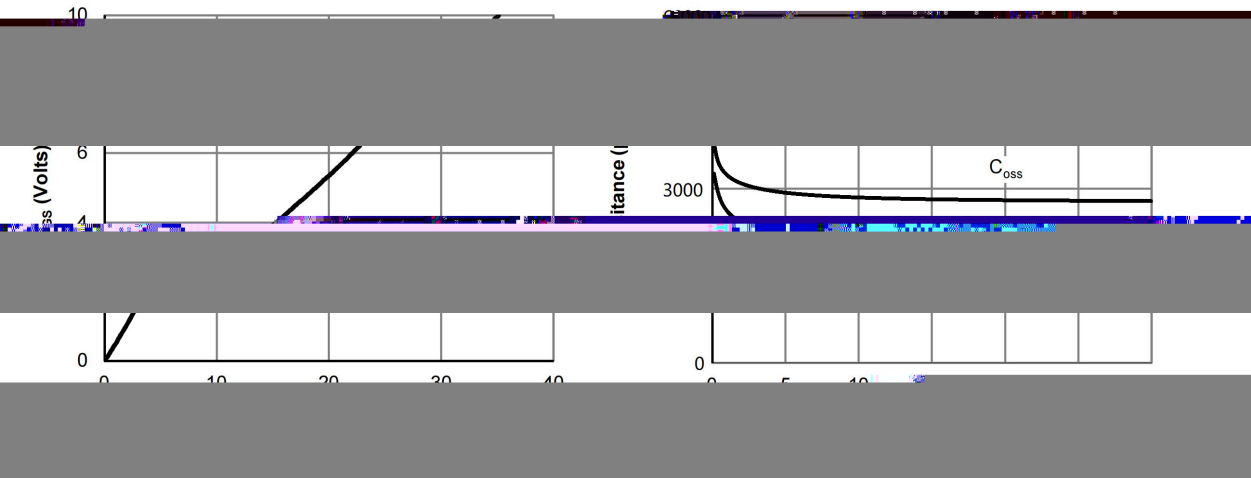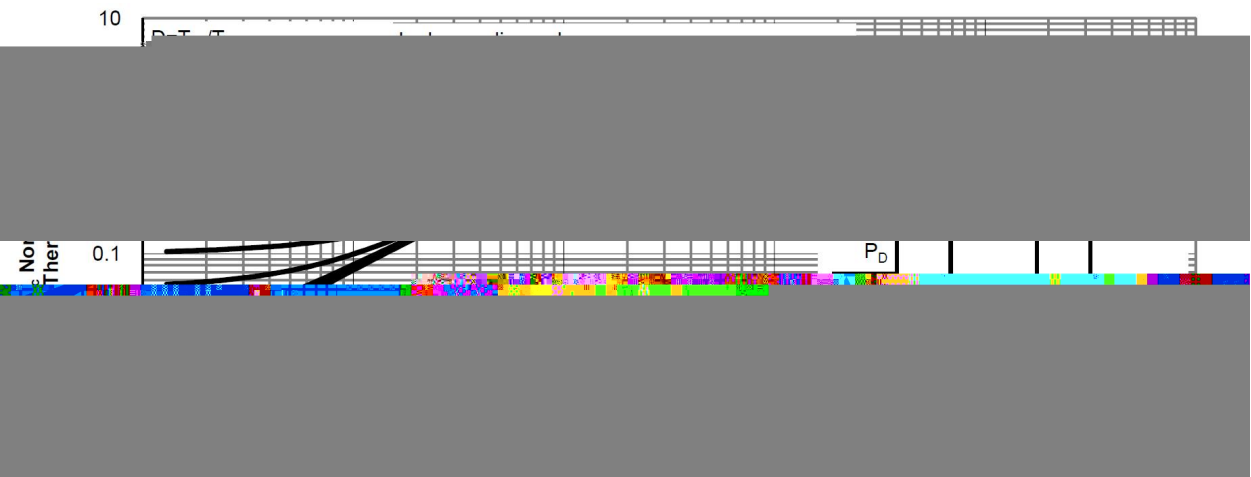

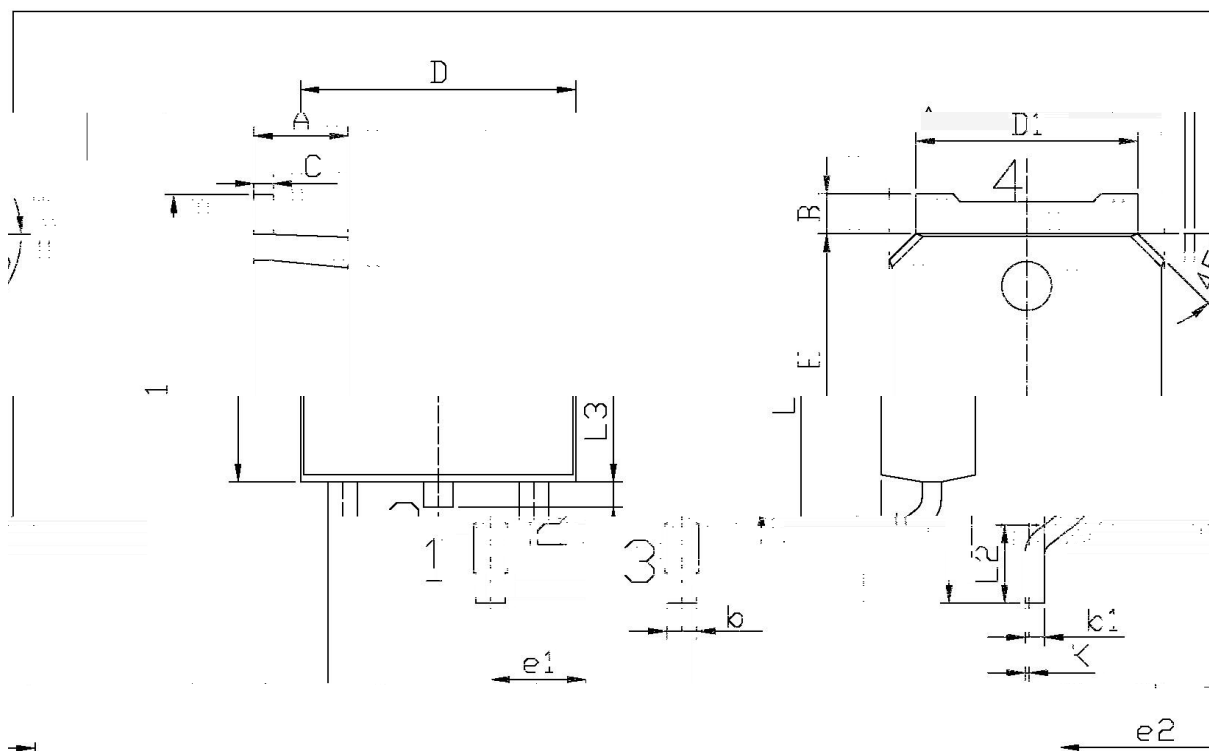


单位: mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Symbol	Symbol	Symbol	Symbol	Symbol
A	2.20	B	0.95	C	2.40
D	2.40	E	0.95	F	2.40
G	2.40	H	0.95	I	2.40
J	2.40	K	0.95	L	2.40
M	2.40	N	0.95	O	2.40
P	2.40	Q	0.95	R	2.40
S	2.40	T	0.95	U	2.40
V	2.40	W	0.95	X	2.40
Y	2.40	Z	0.95		

ТН-252

/ Marking Instructions

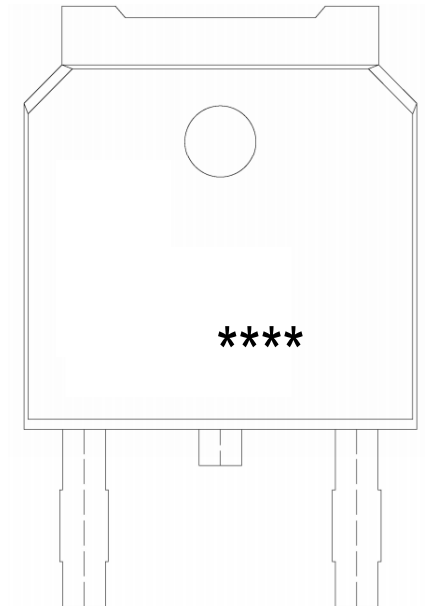

BR

120P04

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±

°C

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

±

°C

±

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices