

/ Descriptions

PDFN 3×3A-8L P MOS

/ Features

±


≤

AEC-Q101

。

/ Applications

/

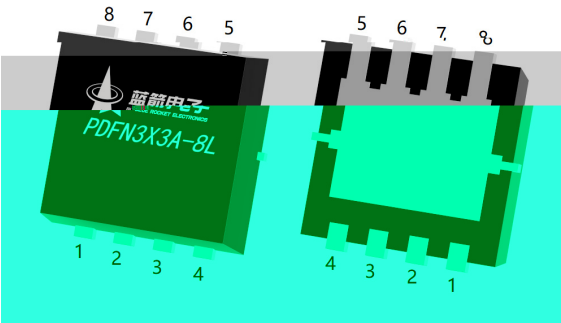

/ Marking

/ Absolute Maximum Ratings(Ta=25)

		℃		
			±	
		℃		
	≤	θ		
		θ		





/ Electrical Characteristics(Ta=25)

		μ				
					±	
		μ				
						Ω
						Ω




/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

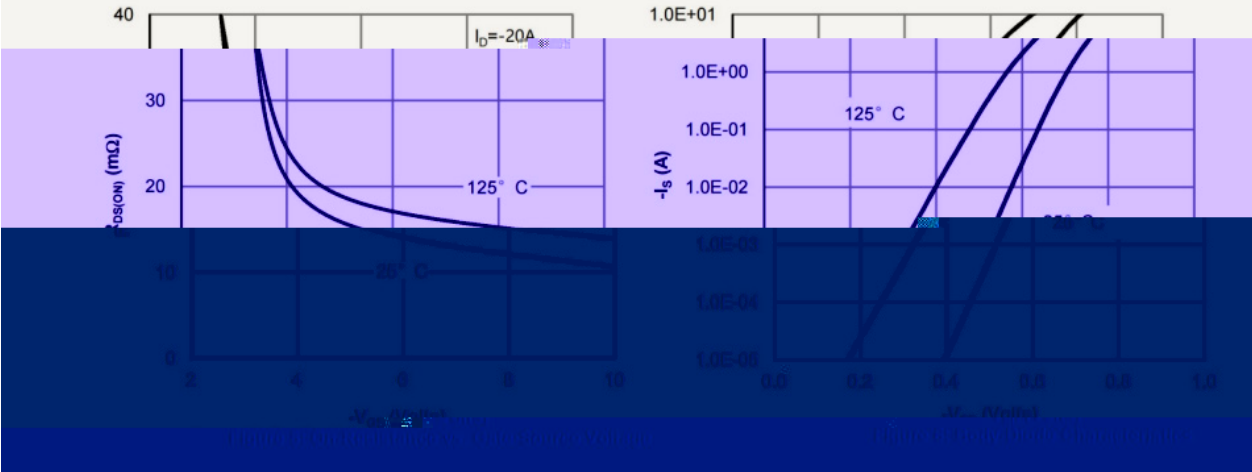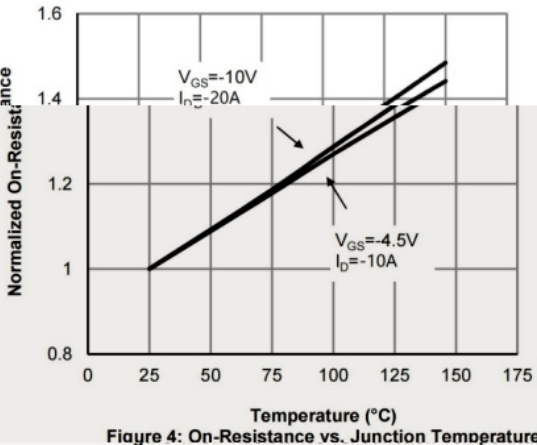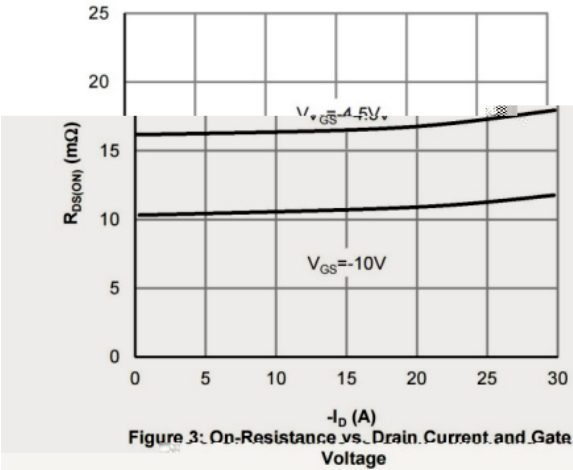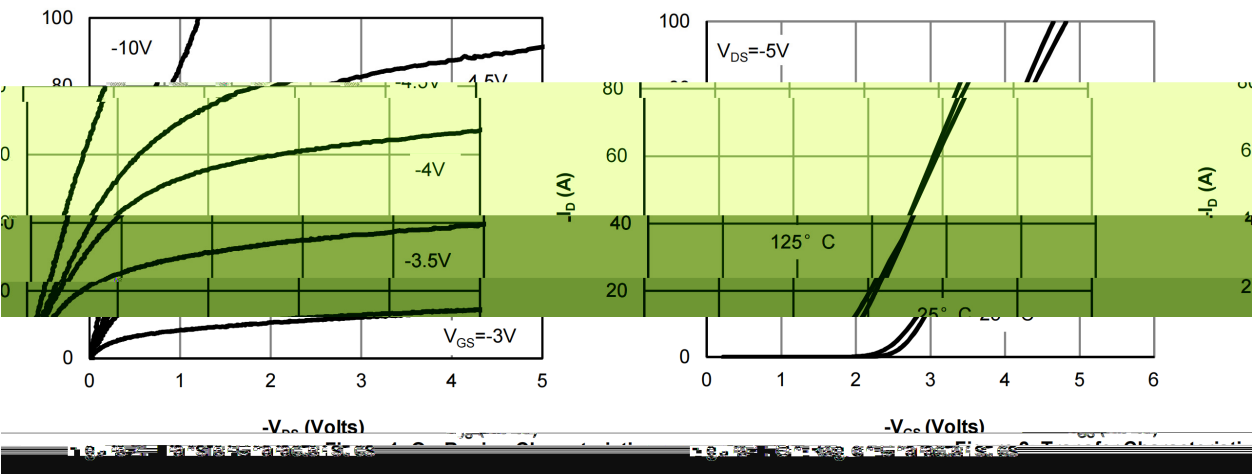


/ Electrical Characteristic Curve

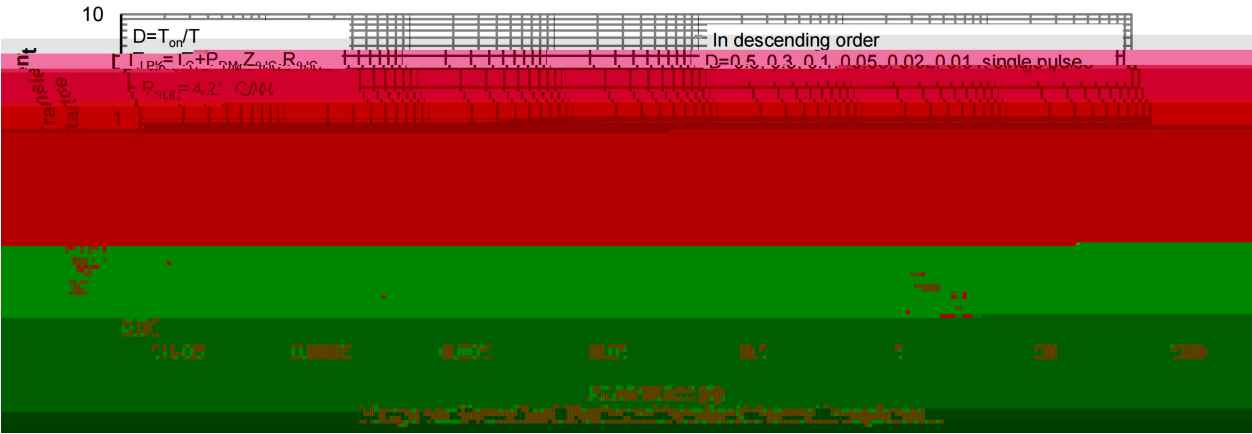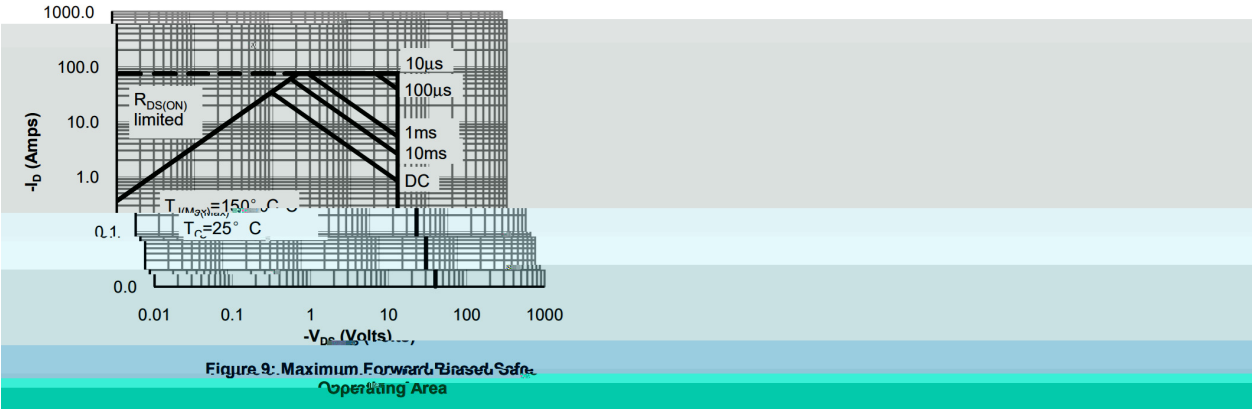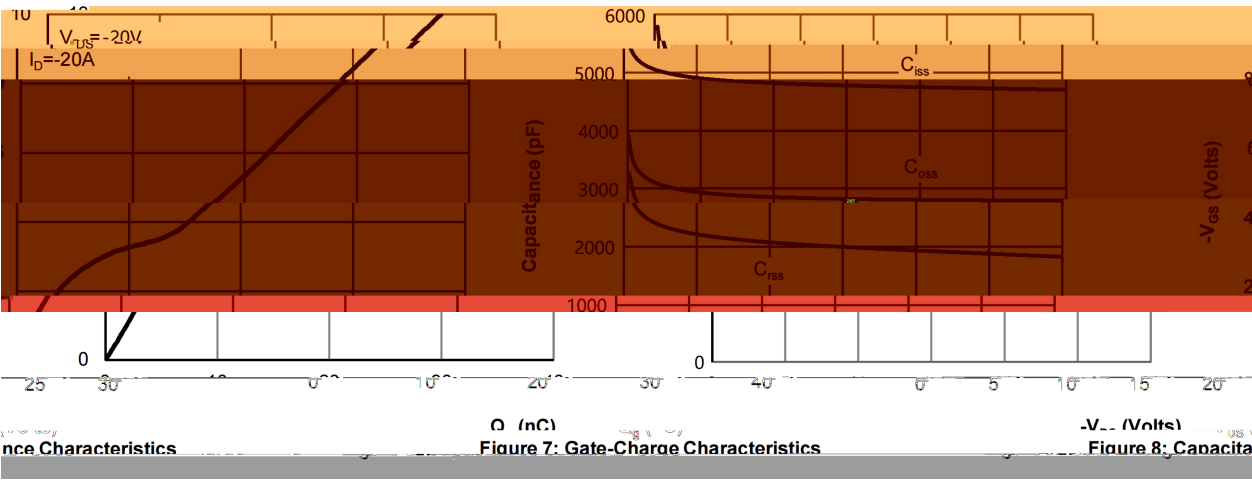

/ Package Dimensions


PDFN3X3A-8L


Unit:mm

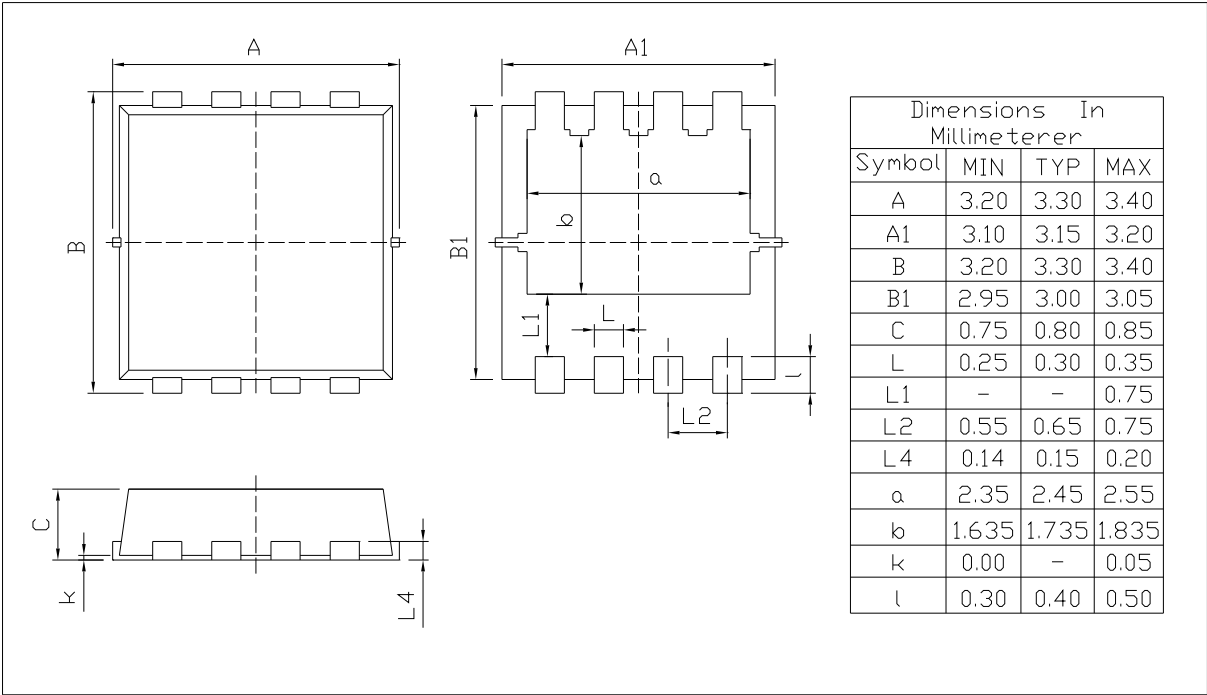

Rev.00 202011

/ Marking Instructions

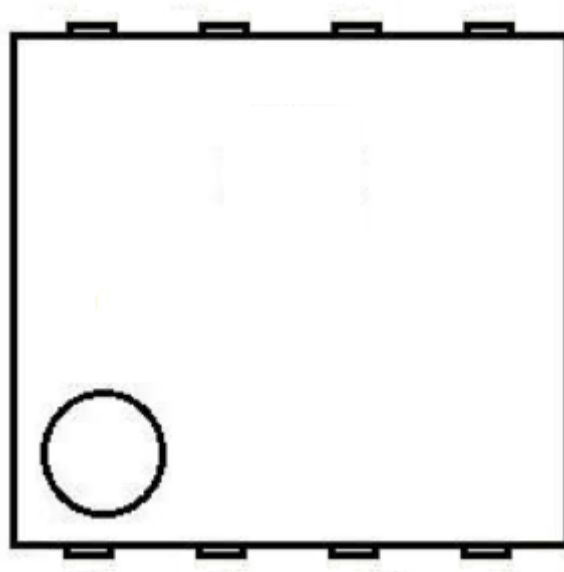

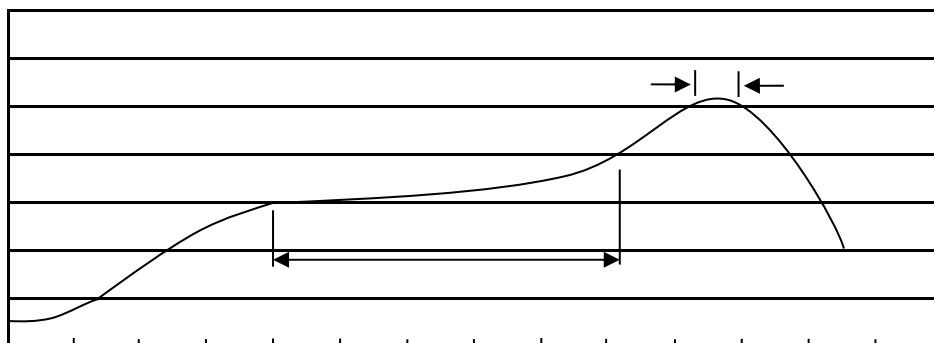 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$ $\pm$ $\pm$ / **Packaging SPEC.**

x								

/ Notices