

/ Absolute Maximum Ratings($T_a=25^\circ\text{C}$)





[illegible]

/ Electrical Characteristics(Ta=25)

						Ω
						Ω

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

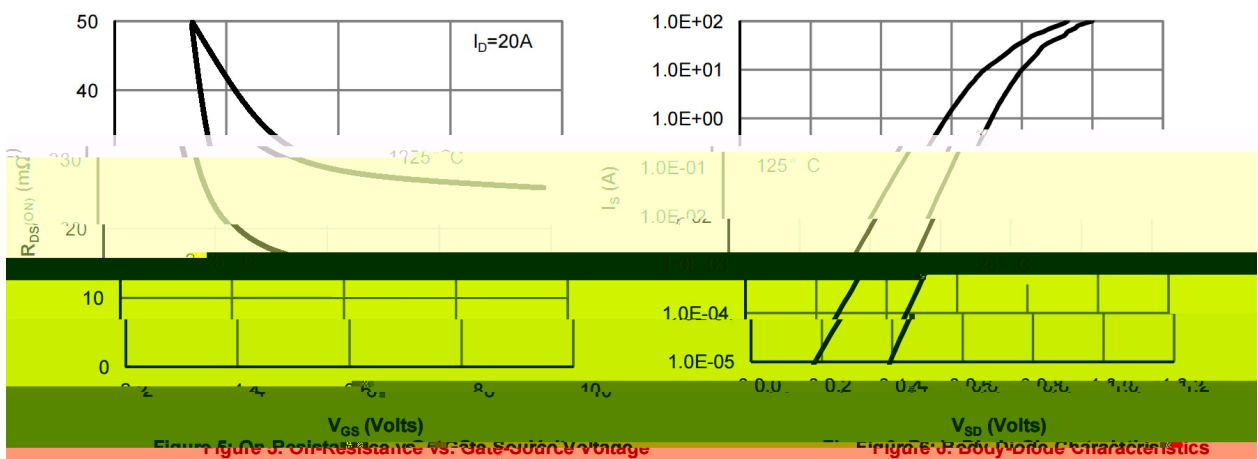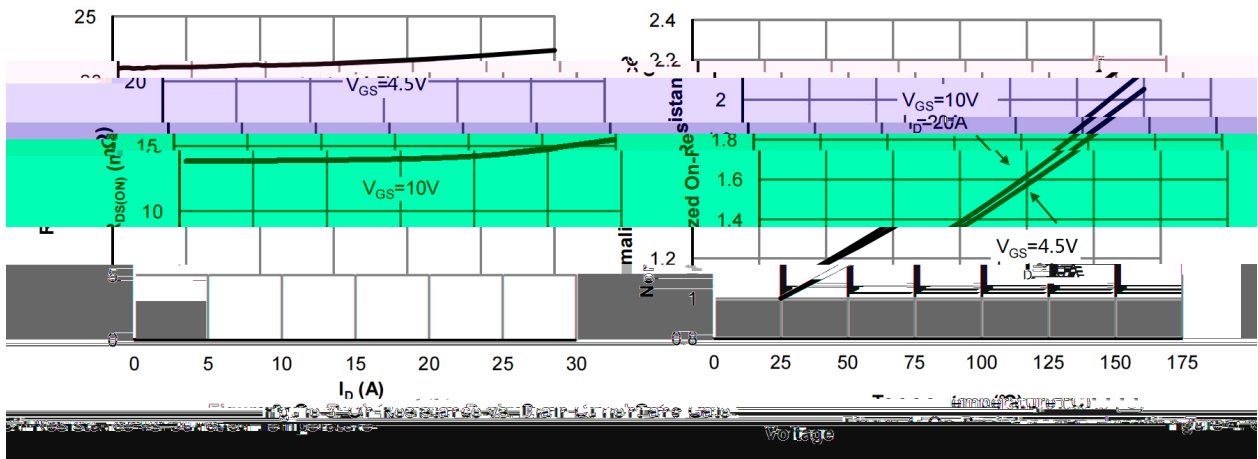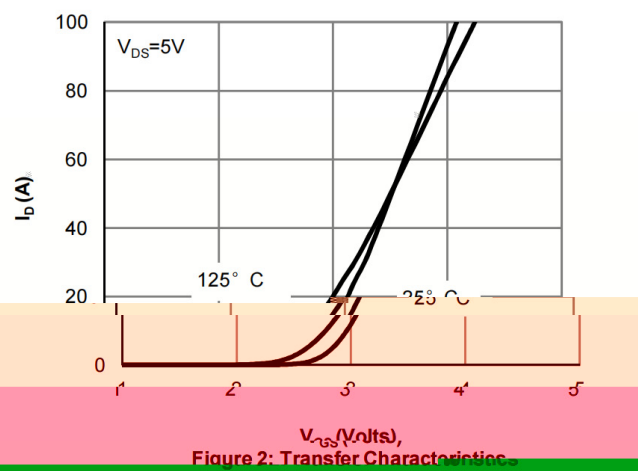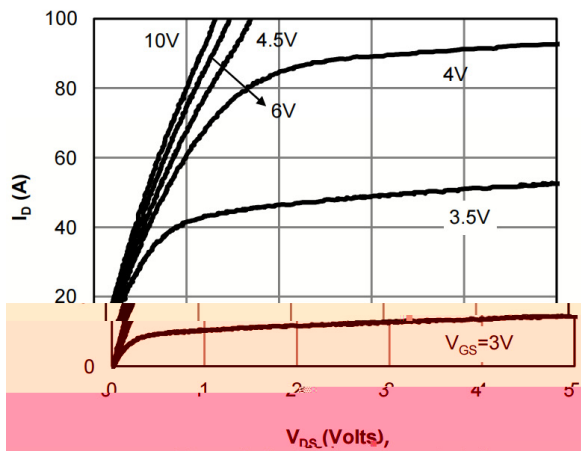

/ Electrical Characteristic Curve

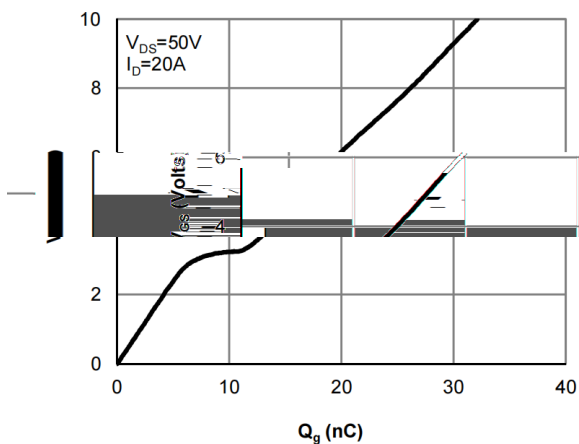


Figure 7: Gate-Charge Characteristics




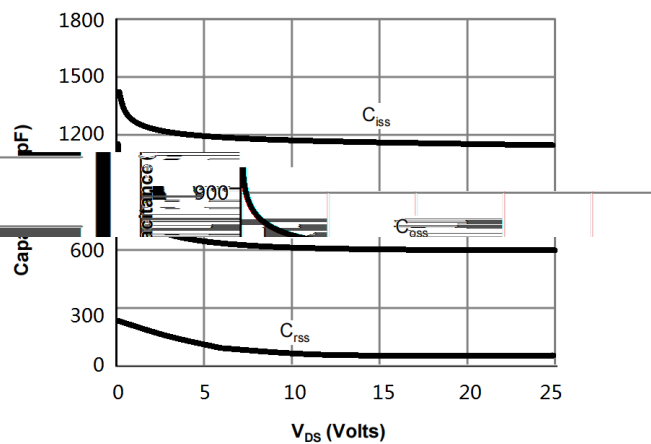



Figure 8: Capacitance Characteristics

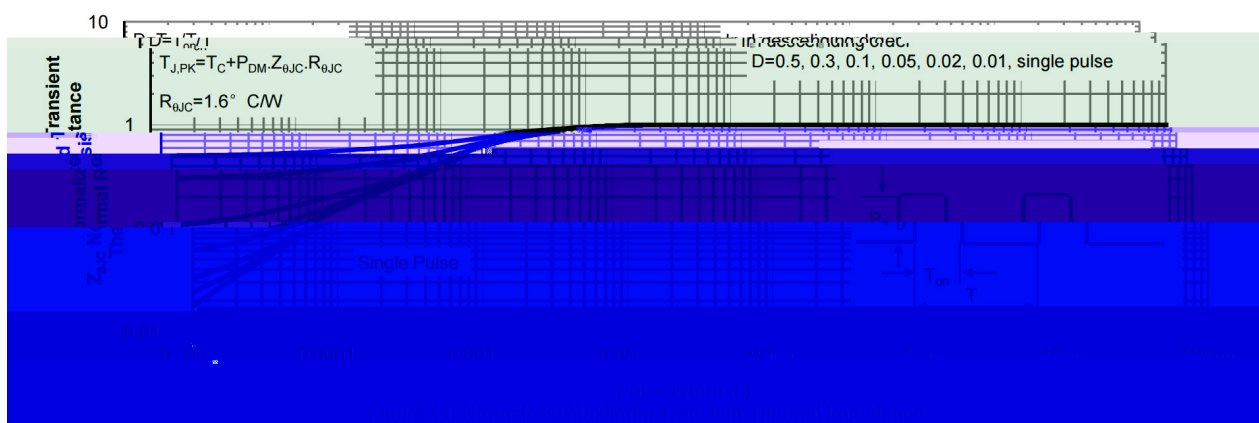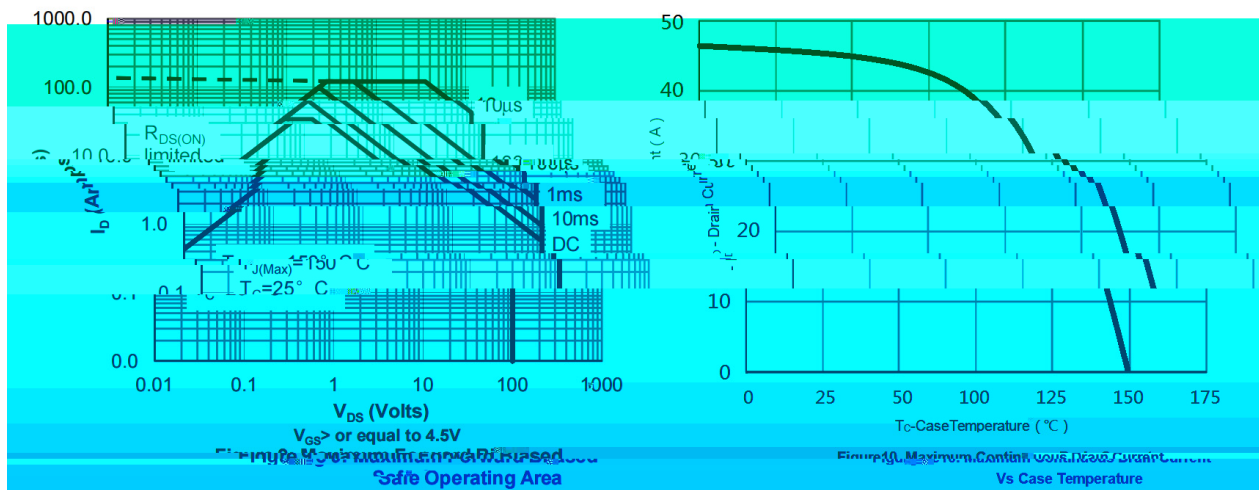

/ Package Dimensions




/ Marking Instructions

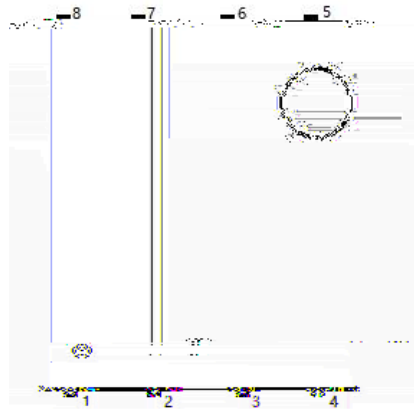

BR

Q

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

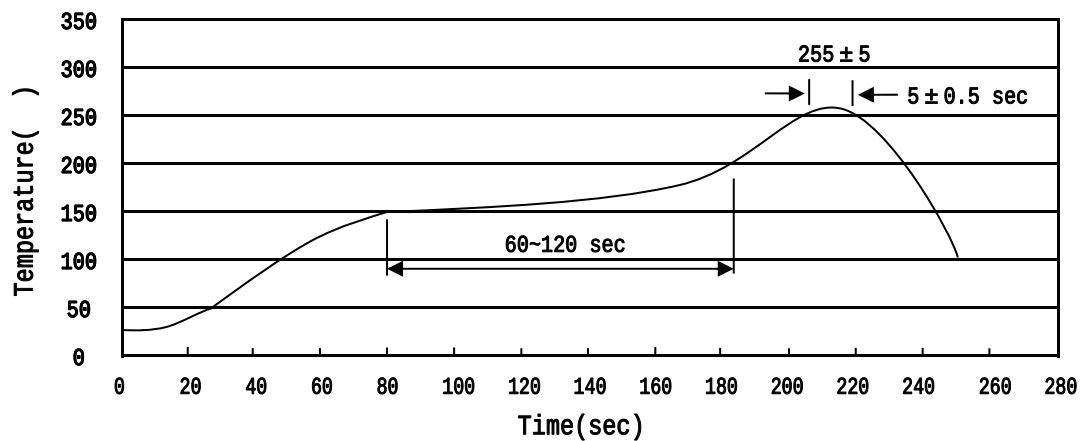 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$ $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices