


/ Descriptions

/ Features


$\leq \Omega$
 $\leq \Omega$

/ Applications

/ Equivalent Circuit



/ Pinning

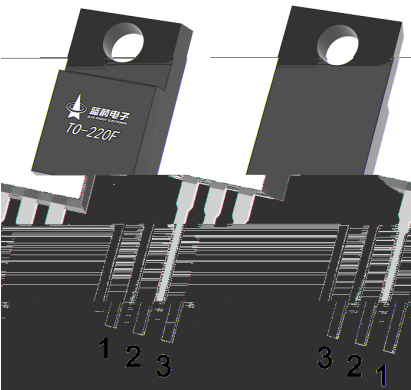

/ Marking

/ Absolute Maximum Ratings(Ta=25)




	≤	θ		
		θ		

/ Electrical Characteristics(Ta=25)


		μ				
						μ
		μ				
						Ω
						Ω
						Ω

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

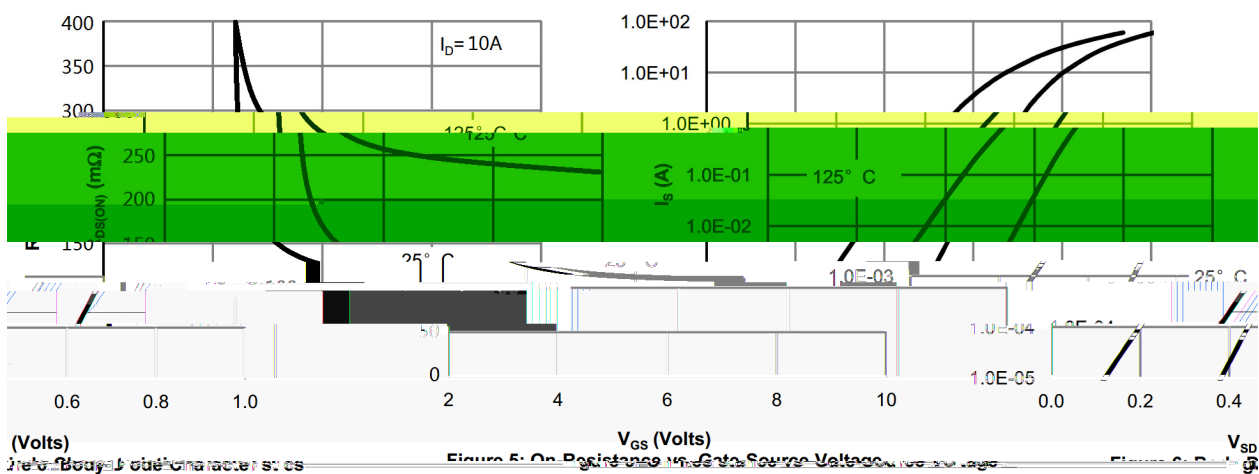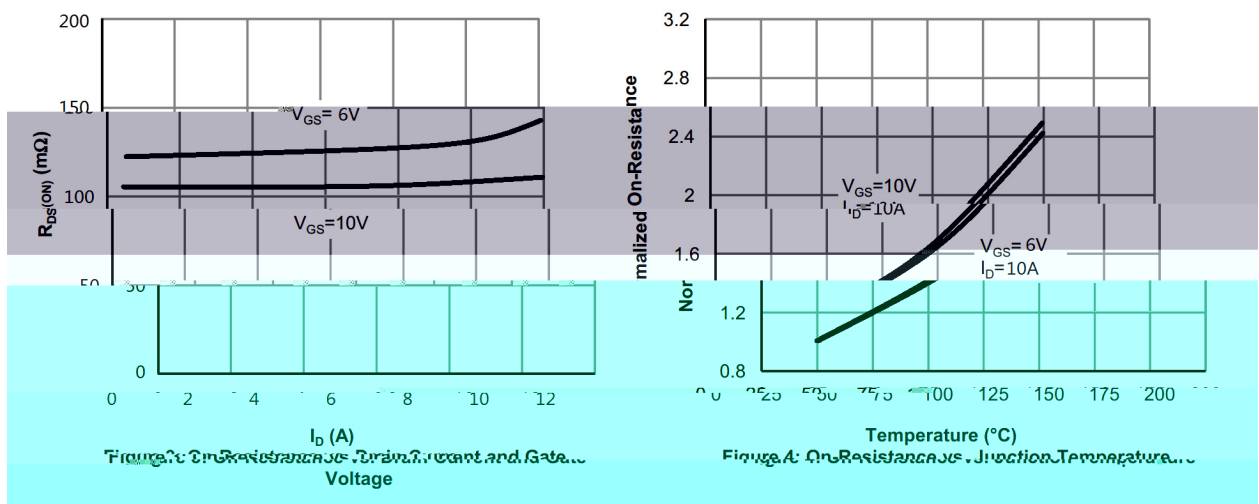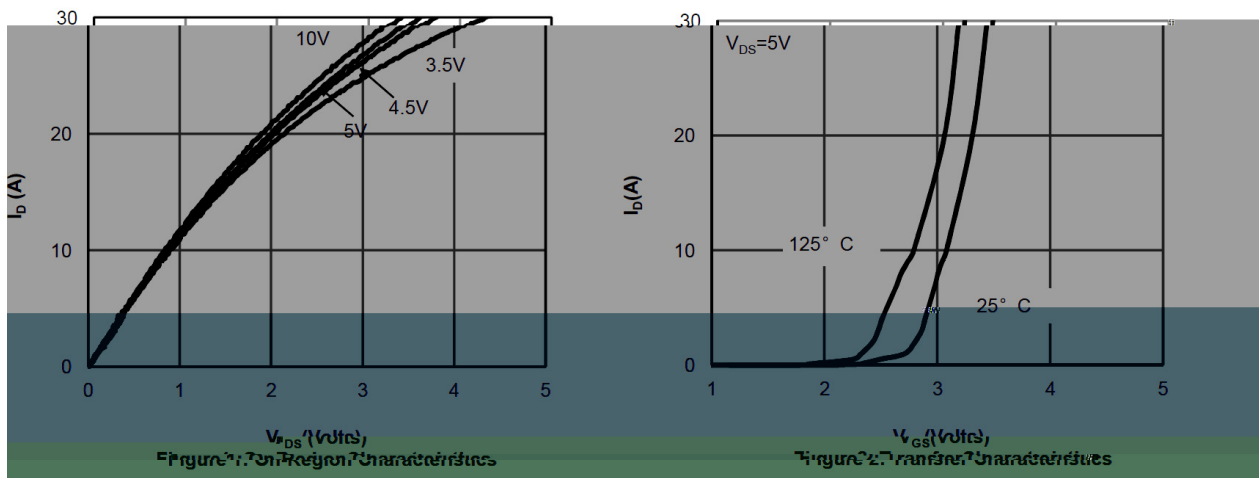


/ Package Dimensions

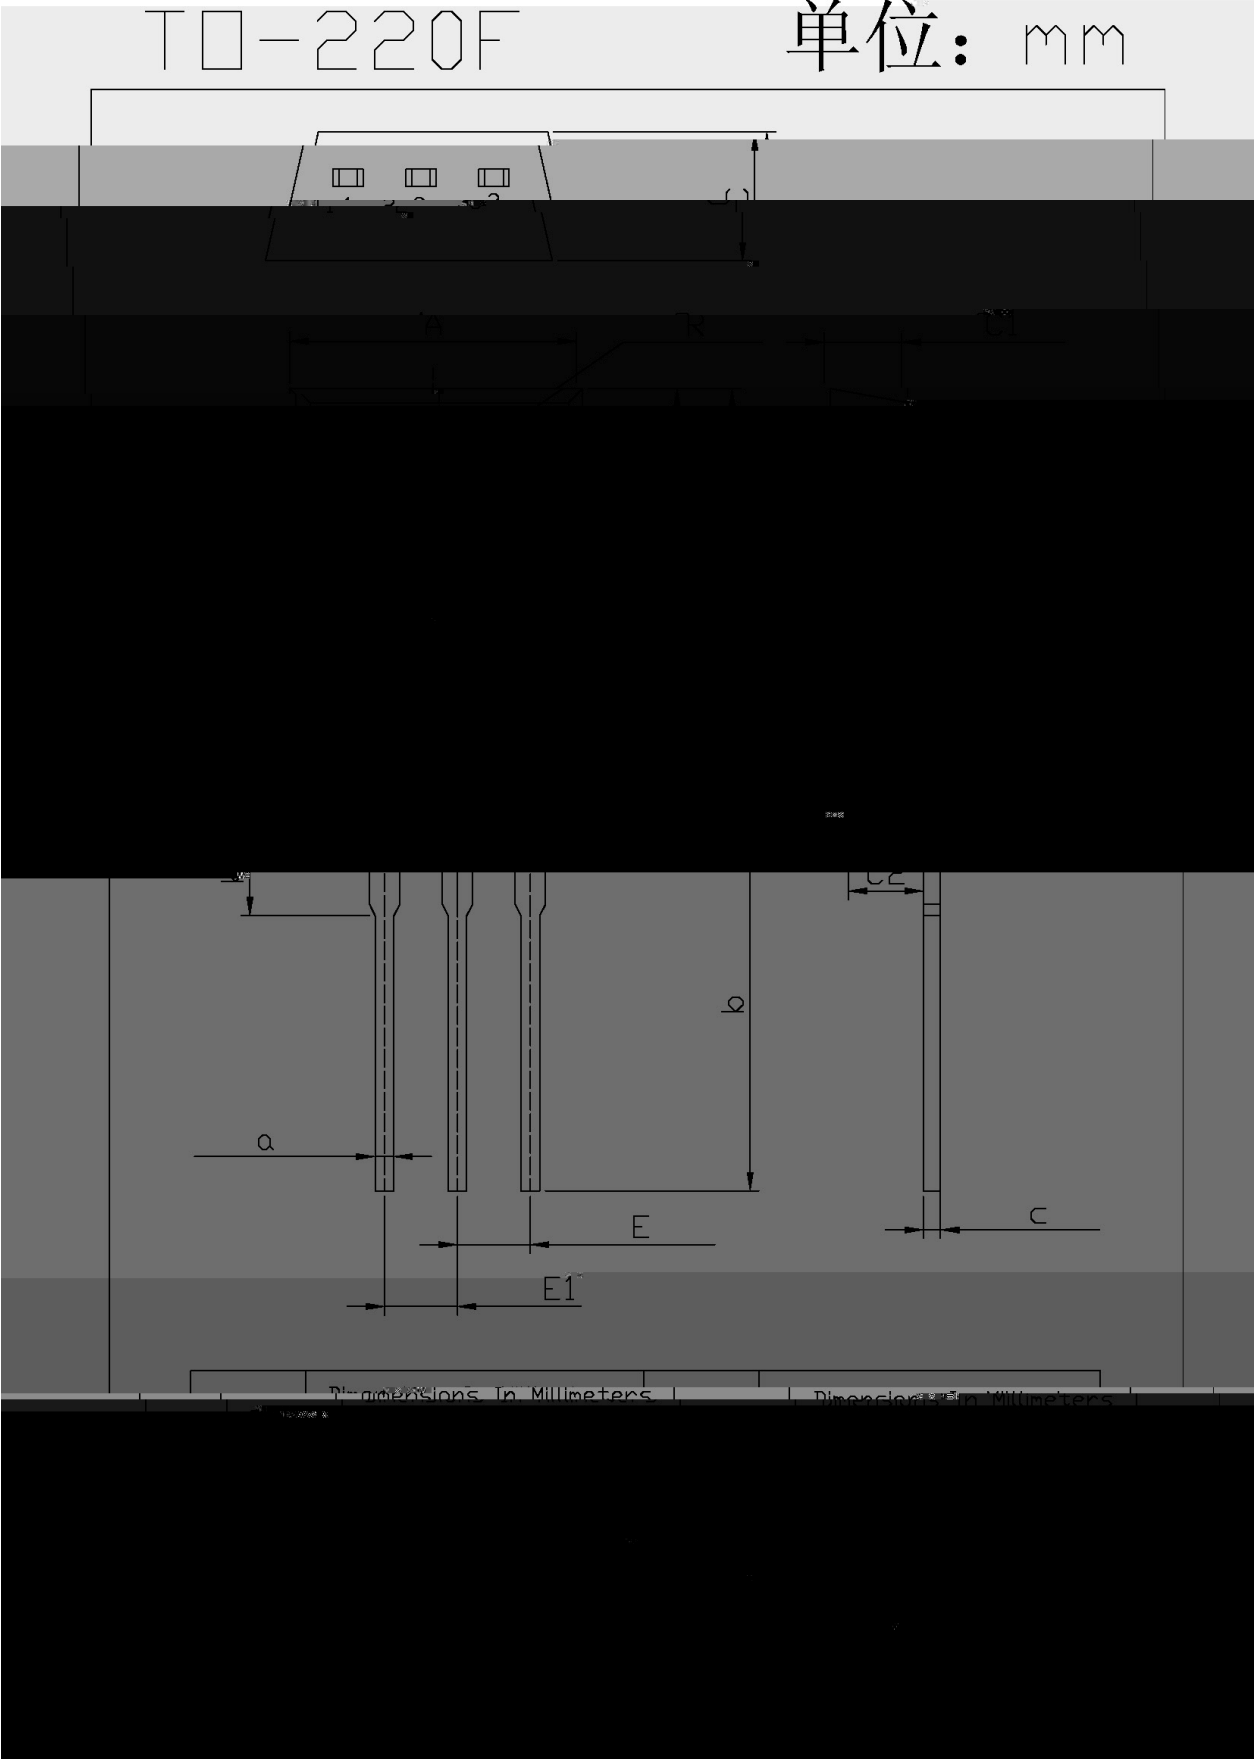

/ Marking Instructions

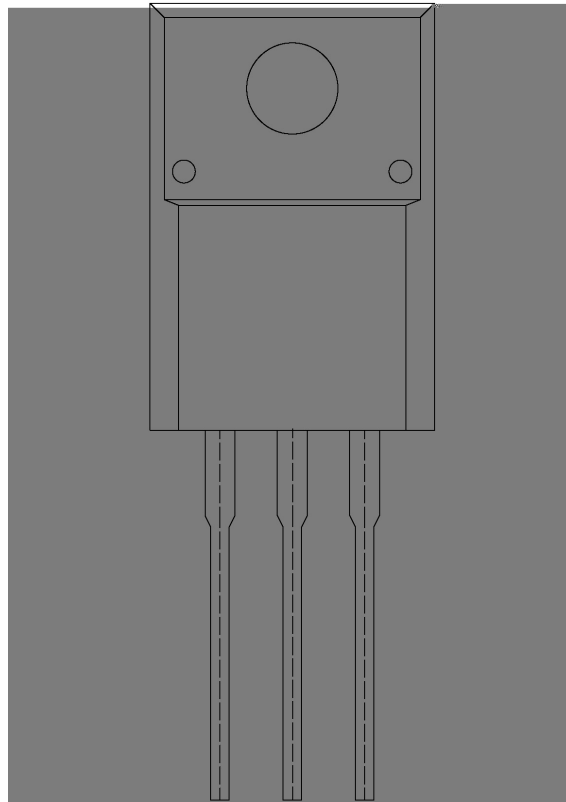

() / Temperature Profile for Dip Soldering(Pb-Free)

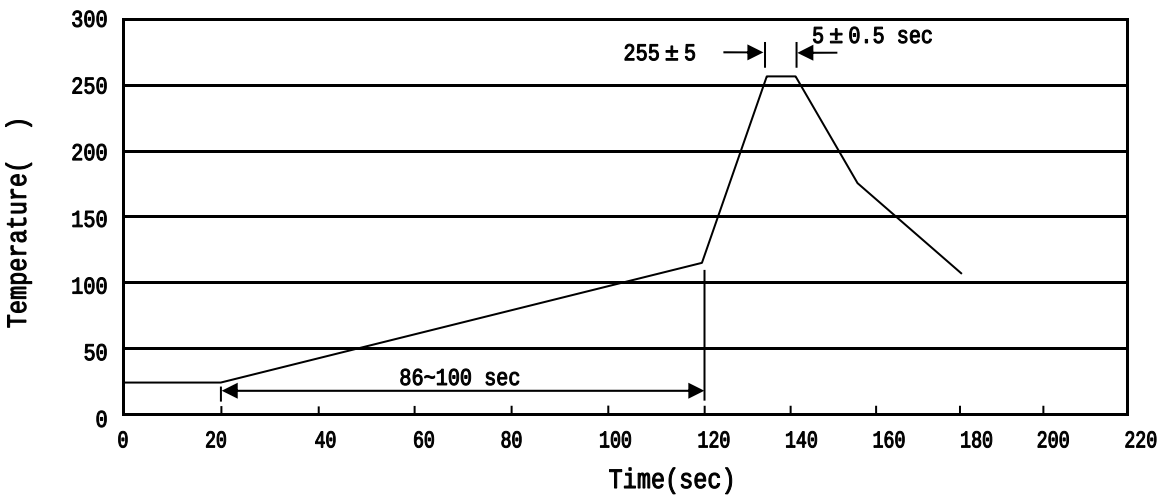

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices