

Rev.A May.-2023

N-Channel Enhancement Mode Field Effect Transistor in a PDFN3 3A-8L Plastic Package.



$V_{DS}=40V$ $I_D=21A$

$R_{DS(ON)}@10V<20m$ (Typ.18mR)

$R_{DS(ON)}@4.5V<35m$ (Typ.24mR)

HF Product.

Motor Drive,Power Tools,LED Lighting,Quick Charger.

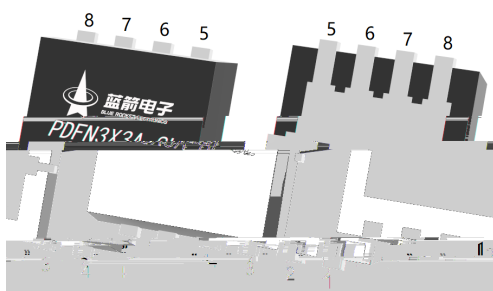

出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

See Marking Instructions.




Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DS}	40	V
Drain Current		$I_D(T_C=25^\circ\text{C})$	21	A
Drain Current - Pulsed		I_{DM}	42	A
Gate-Source Voltage		V_{GS}	± 20	V
Power Dissipation		$P_D(T_C=25^\circ\text{C})$	15	W
Operating and Storage Temperature Range		T_J, T_{stg}	-55 to 150	
Junction-to-Ambient	Steady-State	R_{JA}	80	/W
Junction-to-Case	Steady-State	R_{JC}	8.3	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DS}	$V_{GS}=0V$ $I_D=250\text{ A}$	40	45		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=40V$ $V_{GS}=0V$			1.0	A
Gate-Body leakage current	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\text{ A}$	1	1.8	3	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=6.0A$		18	20	m
		$V_{GS}=4.5V$ $I_D=5.0A$		24	35	m
Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1.0A$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		1200		pF
Output Capacitance	C_{oss}			350		pF

Reverse Trcin 0 10.5 55.98 232.5203 Tm-.0004 Tc-.0 18.41 18.42 ref254.1 265.0fD0 404 Tm4 Tm2((DS0 Twice))D.

/

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=20V$ $V_{GS}=10V$ $R_L=3.3$ $R_{GEN}=3$		6.5		ns
Turn-On Rise Time	t_r			3.7		ns
Turn-Off Delay Time	$t_{d(off)}$			18.2		ns
Turn-Off Fall Time	t_f			7.1		ns

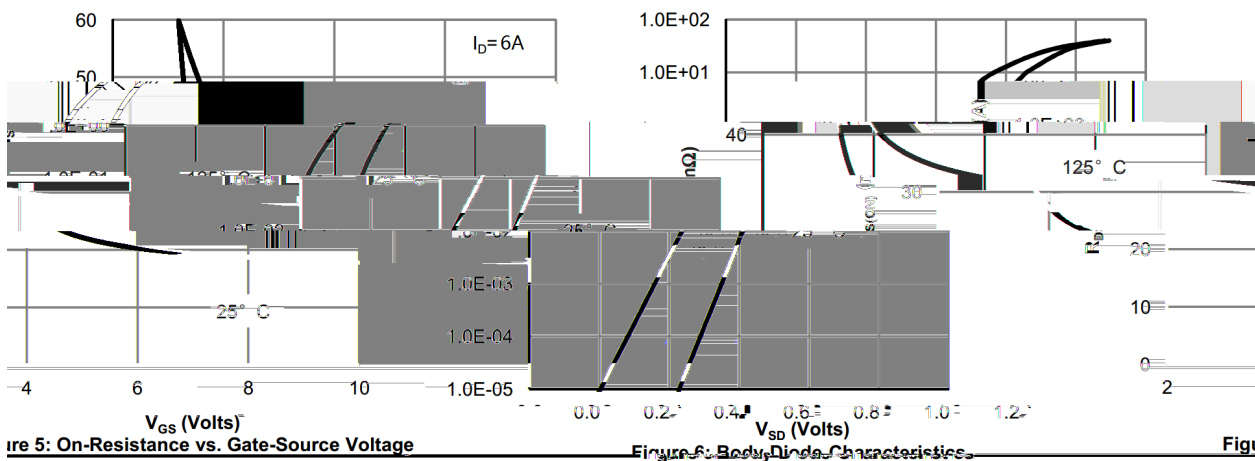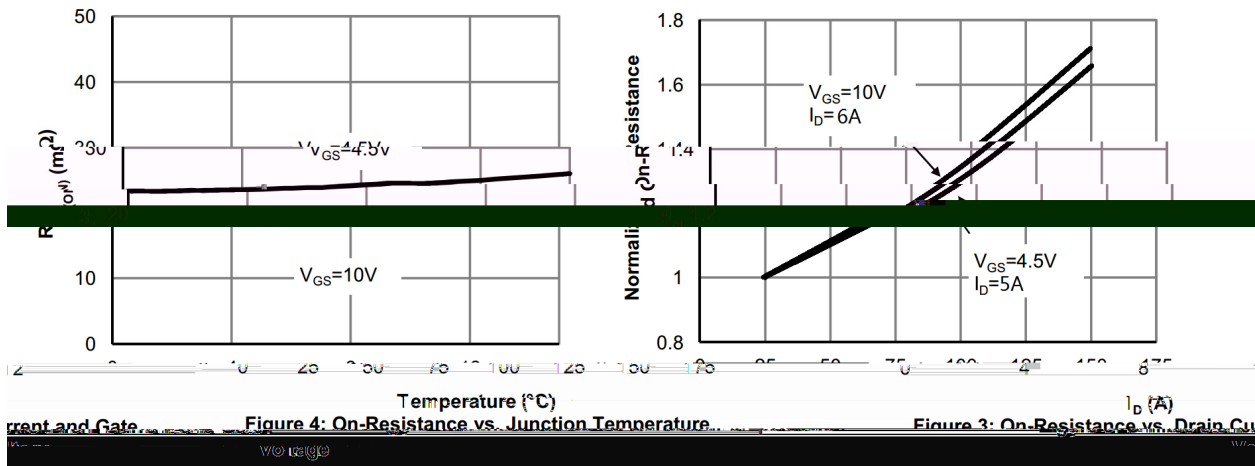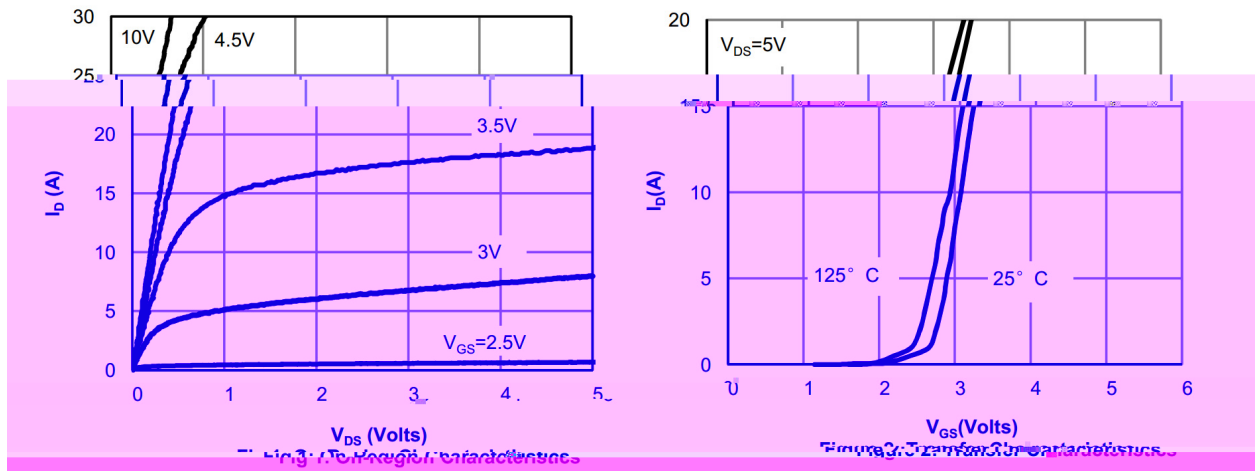

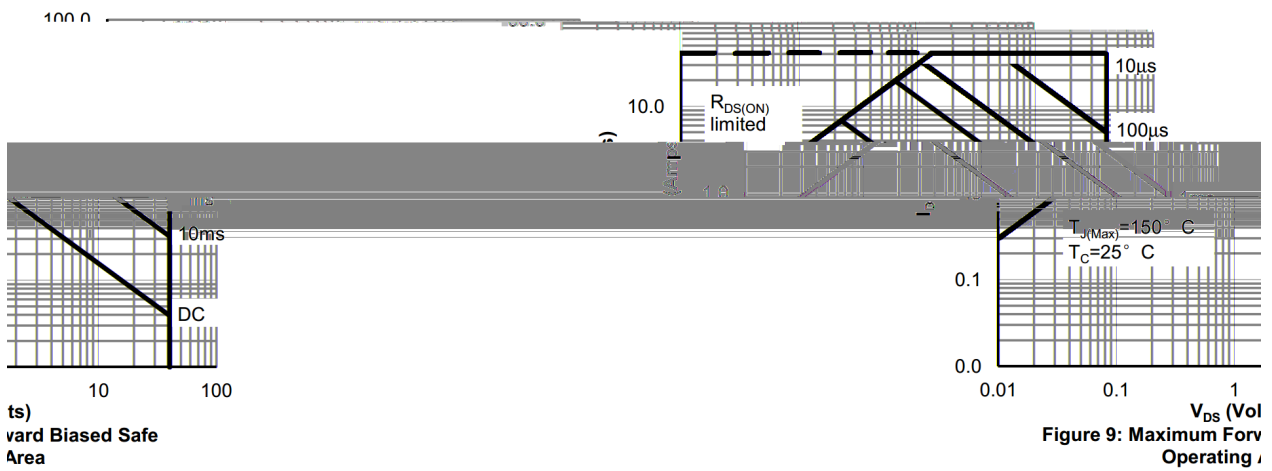
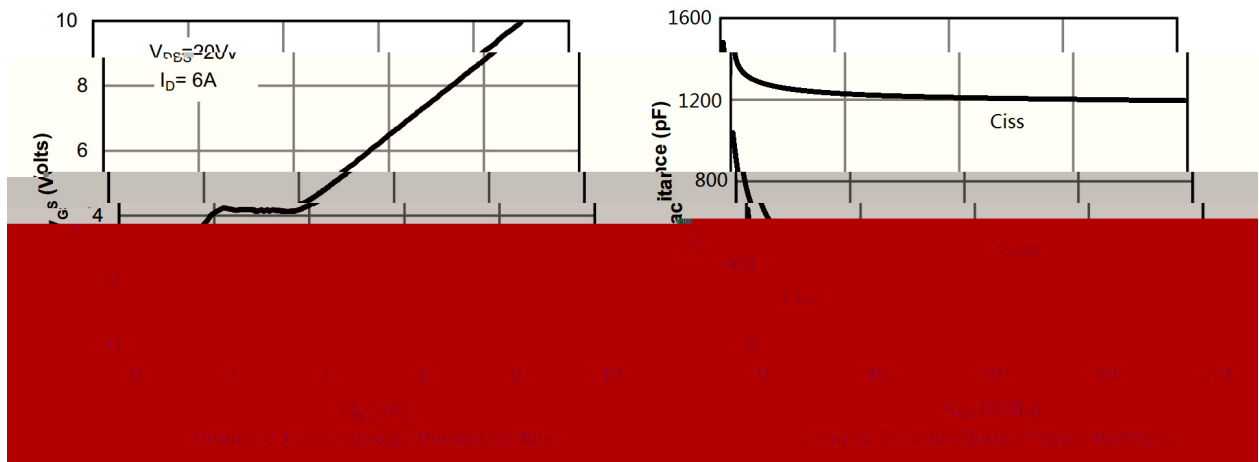


Figure 9: Maximum Forward Bias Safe Operating Area


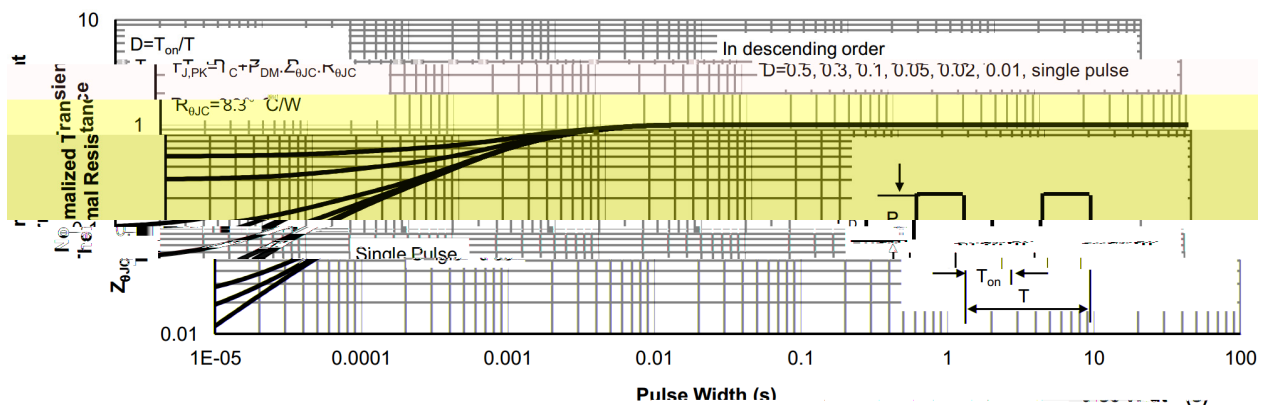



Figure 10: Normalized Maximum Transient Thermal Impedance

PDFN3X3A-8L

Unit:mm

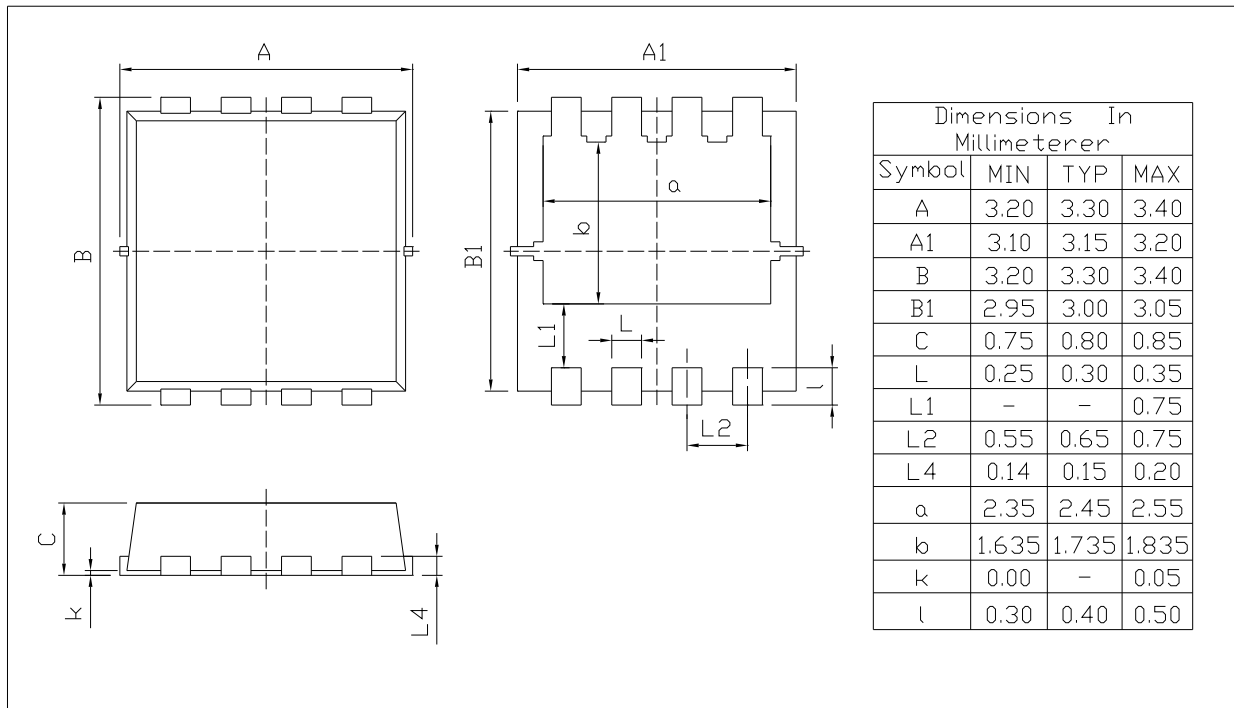

Rev.00 202011

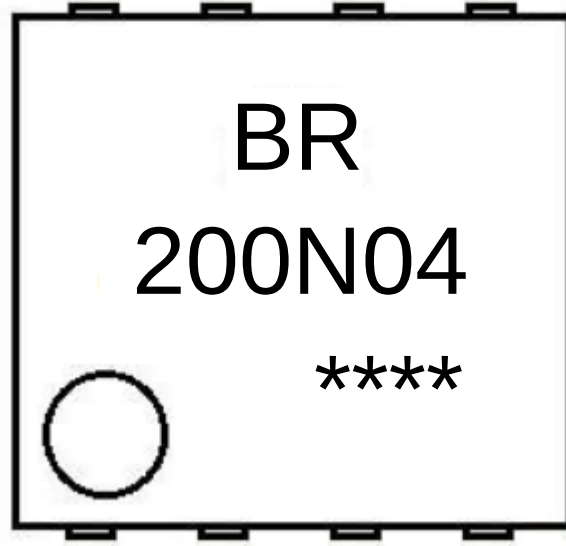

BR

200N04


Note:

BR: Company Code

200N04: Product Type Code

****: Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

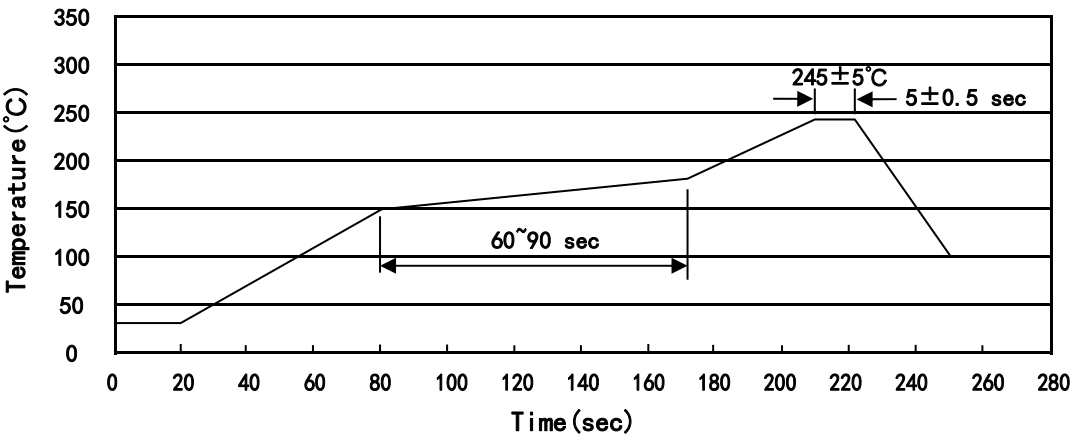

Note:

- | | | | | | |
|---|-----|-----|----|---------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
PDFN3×3A-8L	5,000	2	10,000	6	60,000	13 ×12	360×360×50	380×335×366