

/ Descriptions

GIQ4339060 S P RV

/ Features

$\leq$
 $\leq$
 $\leq$
 $\geq$


Ω
 Ω
 Ω

Ω
 Ω
 Ω


/ Applications

Lqwhqghg iru xvhlq jhghudoxsusrvhvzlwfkqljdqg skdvh frqwuro dssolfdwlrqvl

/ Equivalent Circuit



/ Pinning



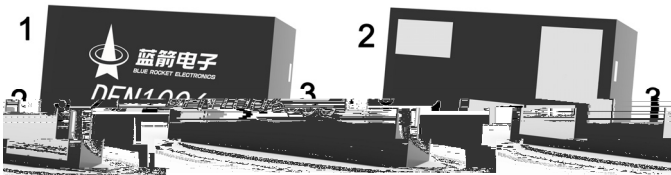


/ Marking

			2	
				$\frac{3}{8}$
	$\geq$	θ		$\frac{3}{8}$

						μ
					$\pm$	μ
						Ω
						Ω
						Ω
						Ω
						Ω
						Ω
		Ω				

/ Electrical Characteristic Curve

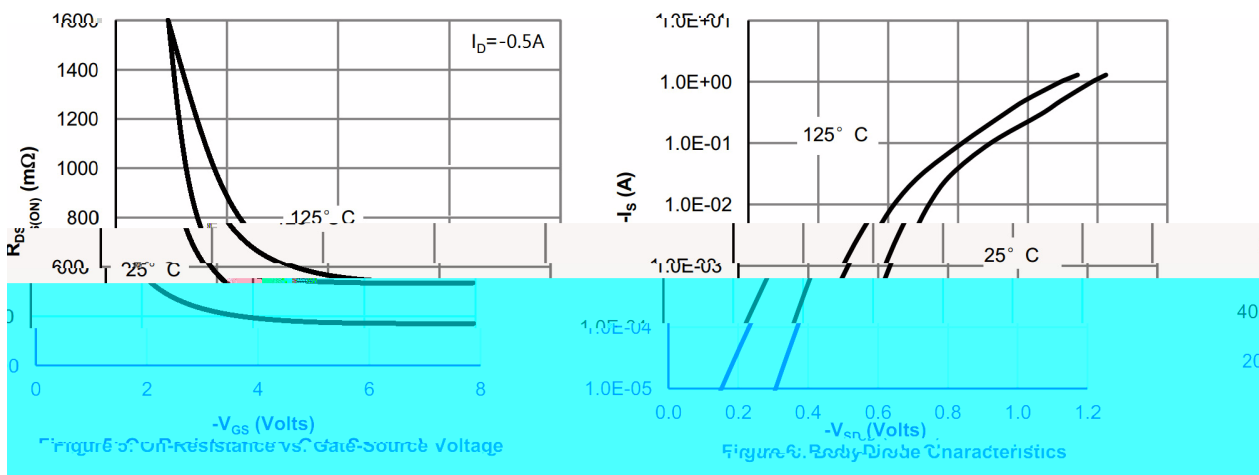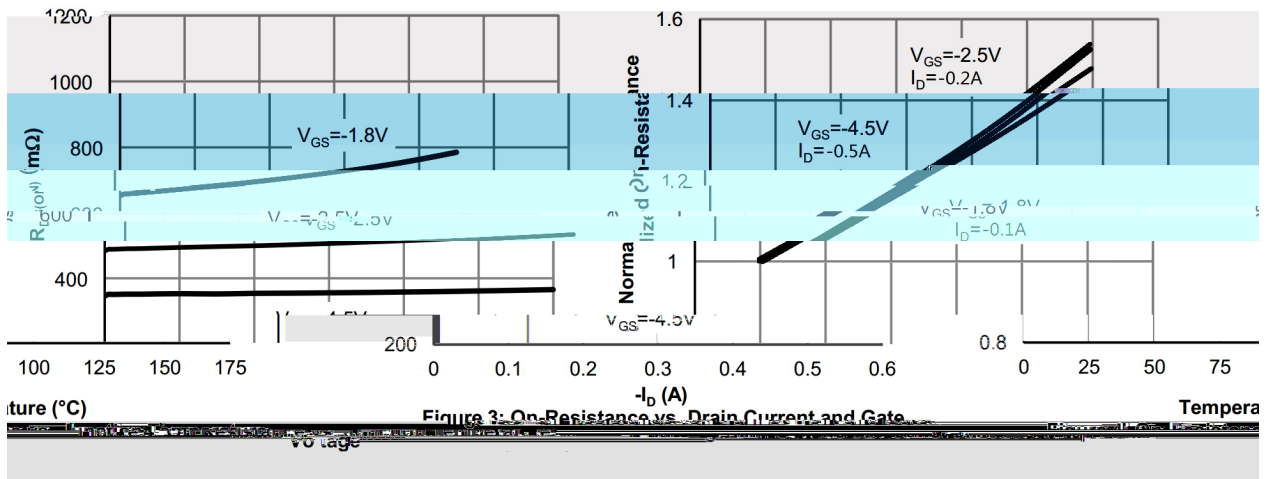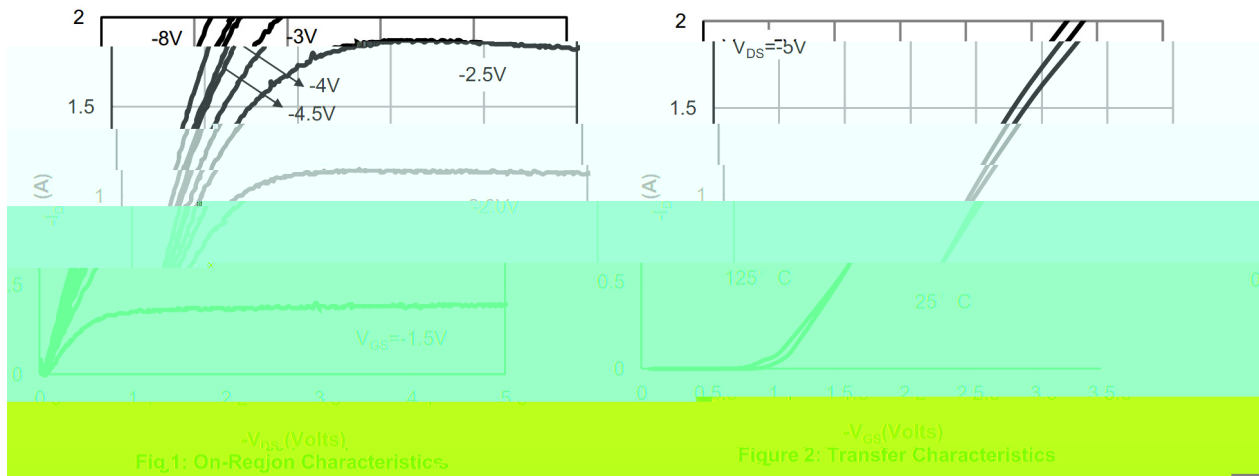

/ Electrical Characteristic Curve




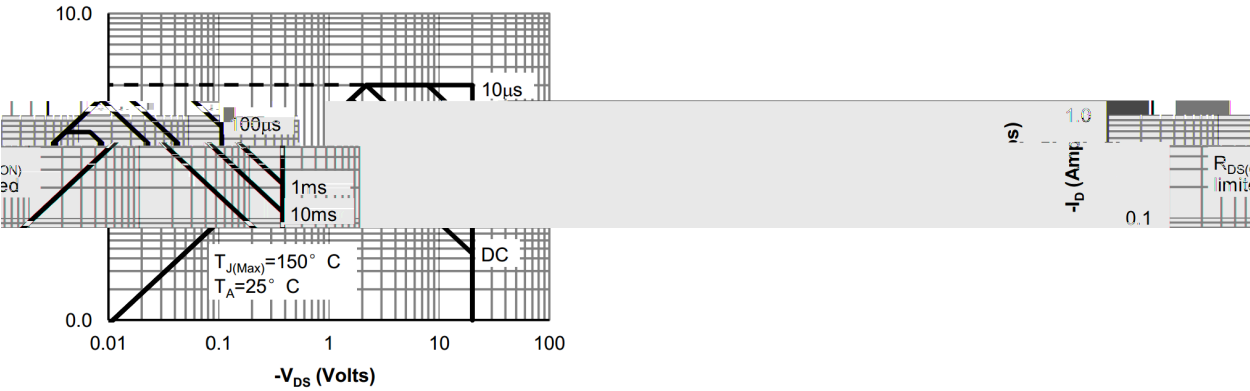



Figure 9: Maximum Forward Biased Safe Operating Area

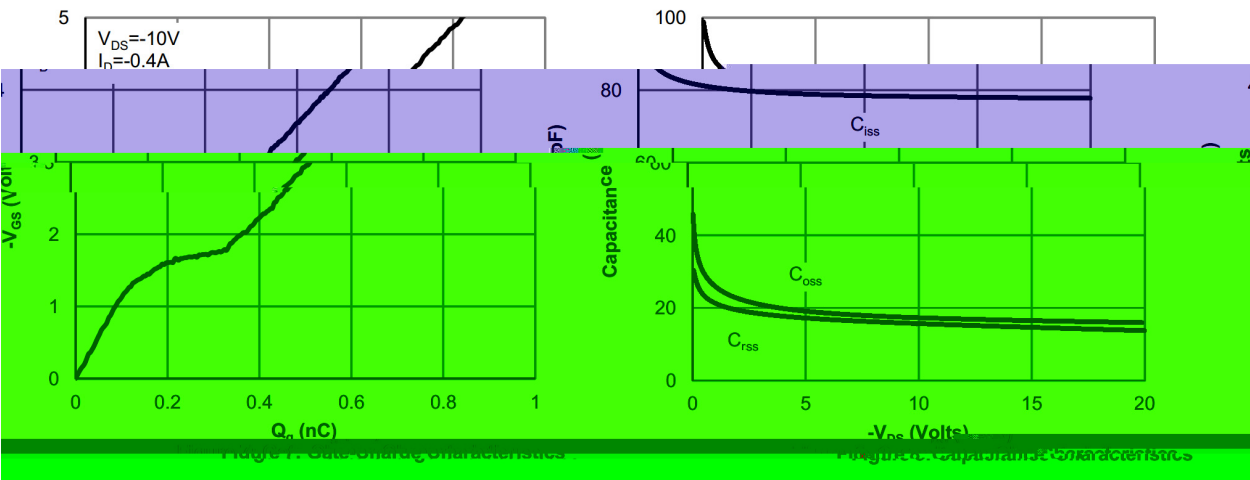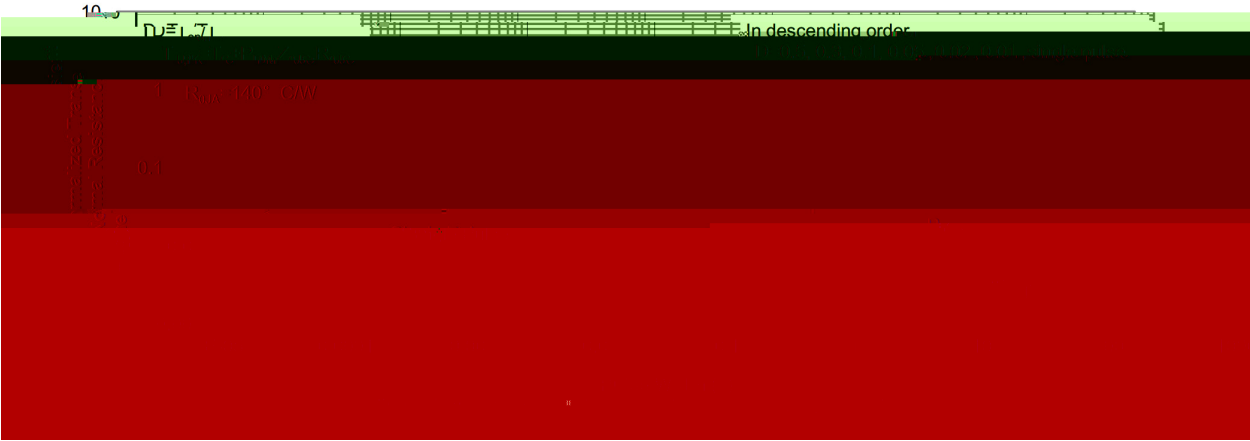


/ Package Dimensions

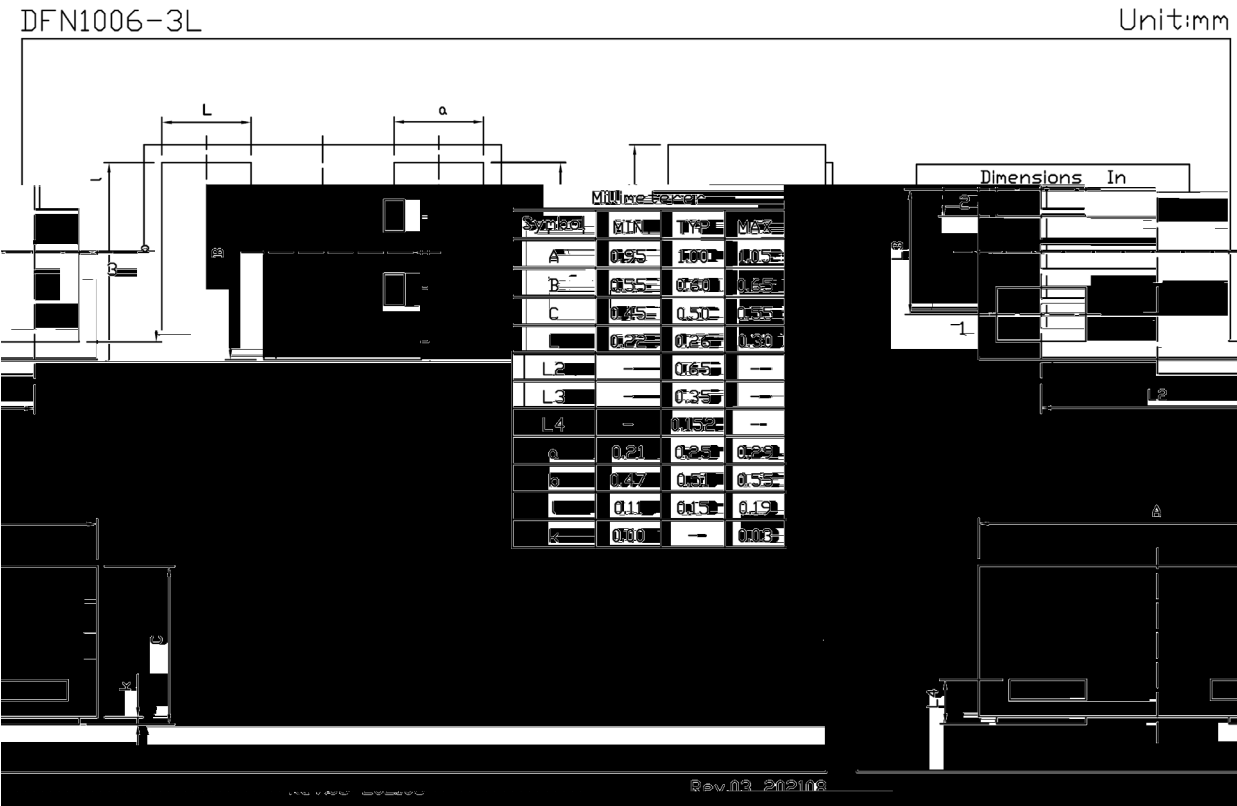

/ Marking Instructions

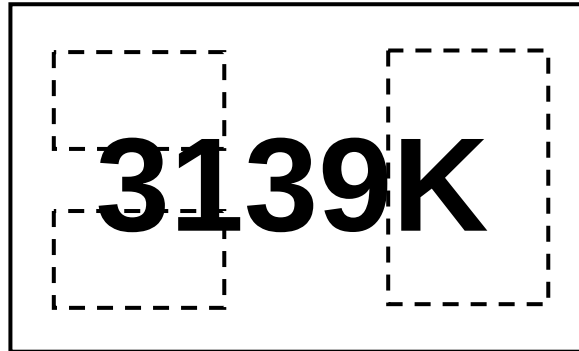

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

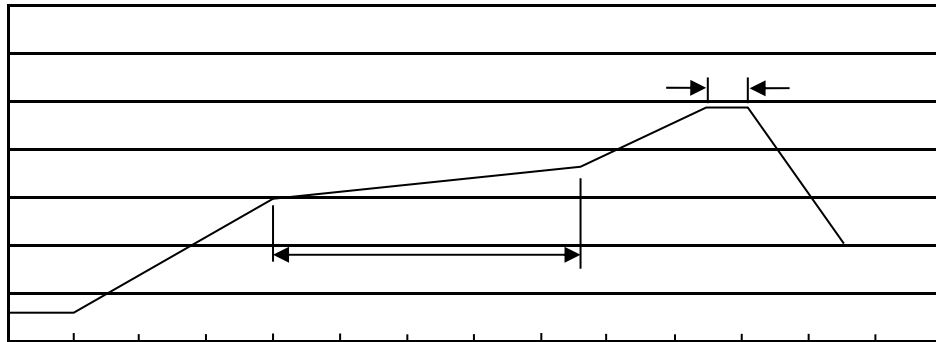

/ Resistance to Soldering Heat Test Conditions

$$2 \frac{3}{8} \qquad 2$$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

/ Notices