


P

Ω
Ω
Ω

AEC-Q101
Reliability, HF Product.

Qualified to AEC-Q101 Standards for High



--	--

	θ		
	θ		

		μ				
						μ
						μ
						μ
		μ				
						Ω




						Ω
		Ω Ω				
		μ				
		μ				

θ

∇

θ

θ
μ

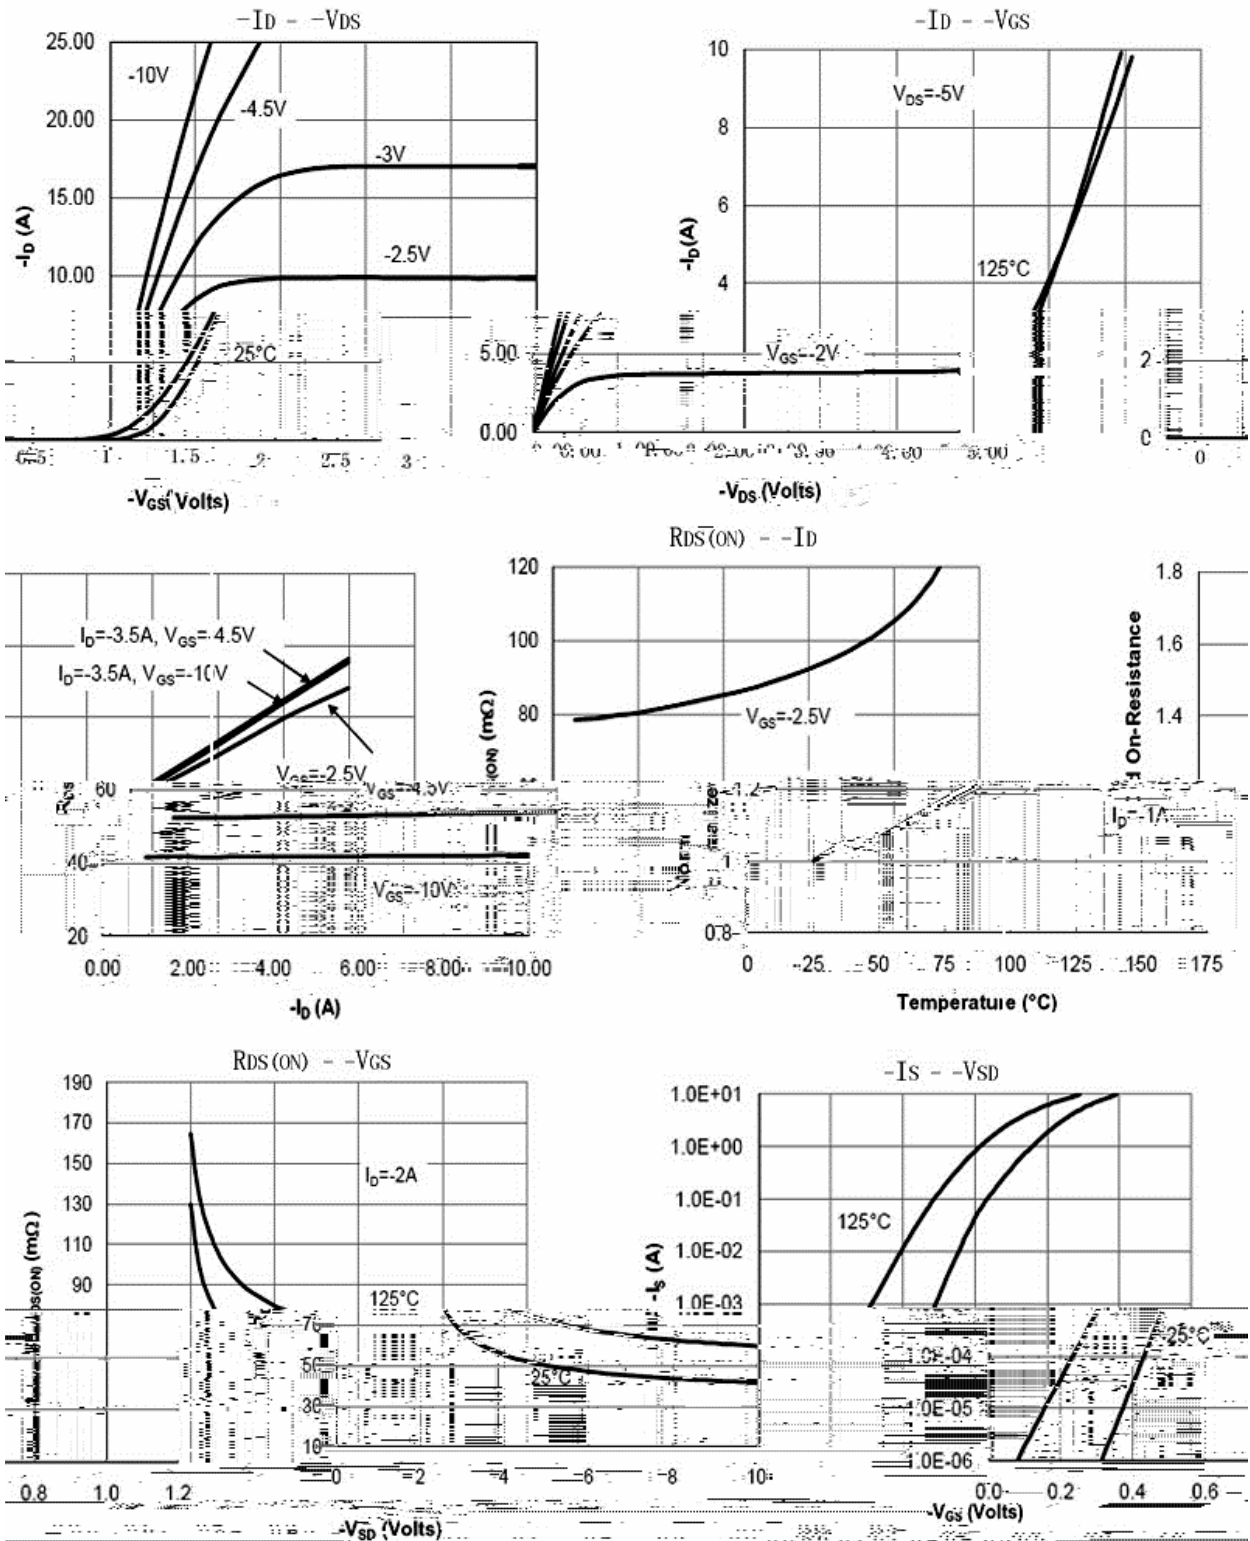










Figure 1 illustrates the experimental setup. A participant is seated at a table, looking at a monitor. The monitor displays a 3D model of a building with a red dot indicating the location of a target. The participant is holding a controller and looking at the screen. The setup includes a monitor, a controller, and a 3D model of the building.

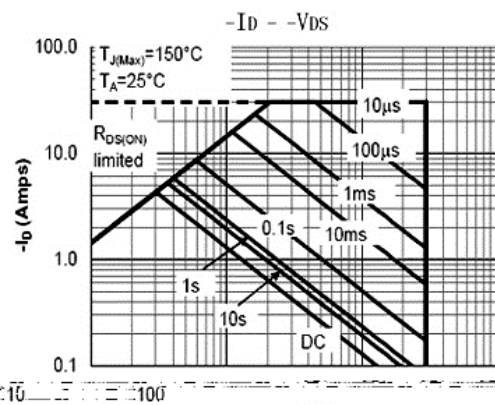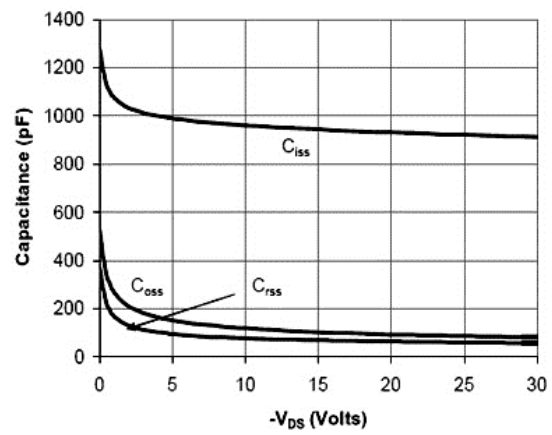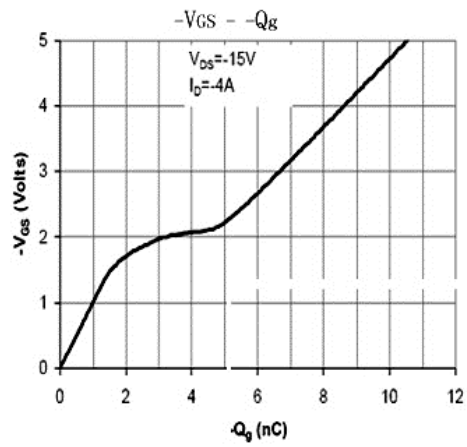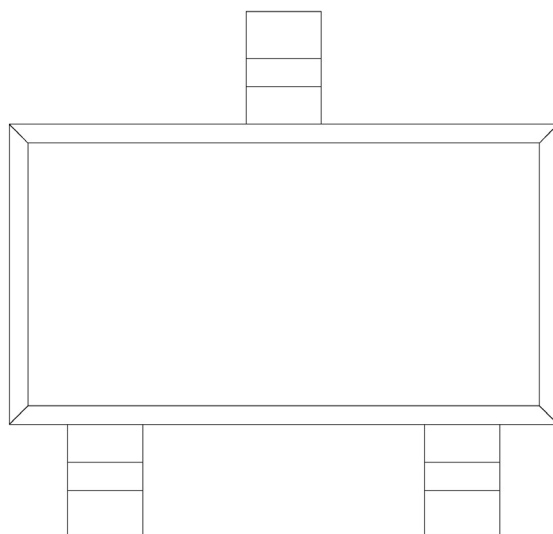

Q

H

Temperature Profile for IR Reflow Soldering(Pb-Free)

±

±

±

±

±

±

±

±

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box /	Reel	Inner Box	Outer Box