

[illegible]

/ Descriptions

DFN1006-3L N MOS


/ Features

2KV


/ Applications

Intended for use in general purpose switching and phase control applications.

/ Equivalent Circuit



/ Pinning

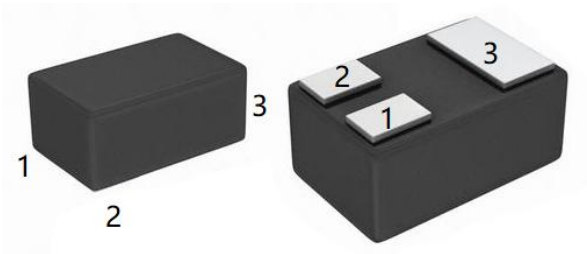

/ Marking



	(℃)		
	(℃)		



/ Electrical Characteristic Curve






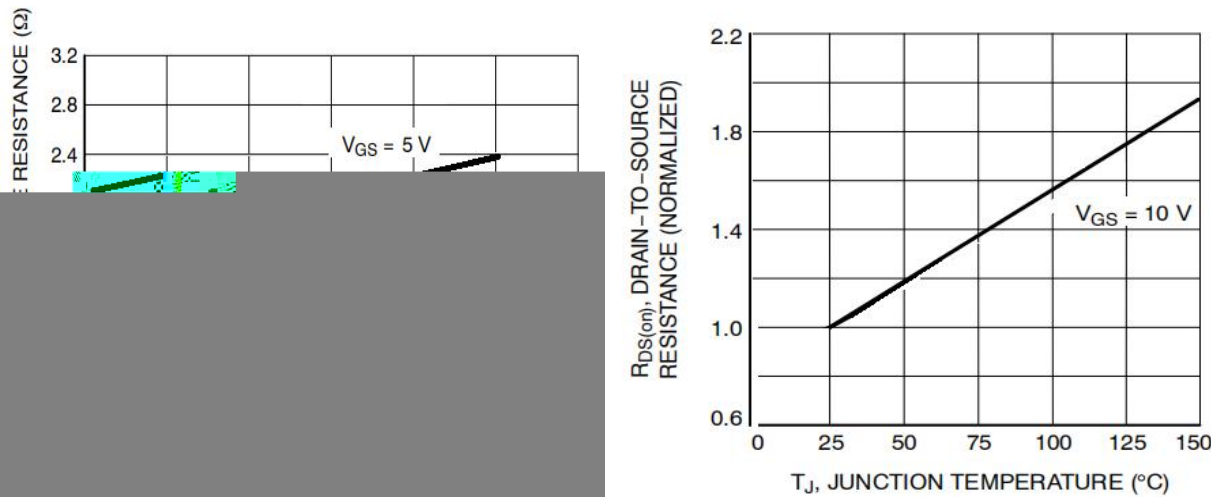


Figure 4 On-Resistance Variation with Temperature

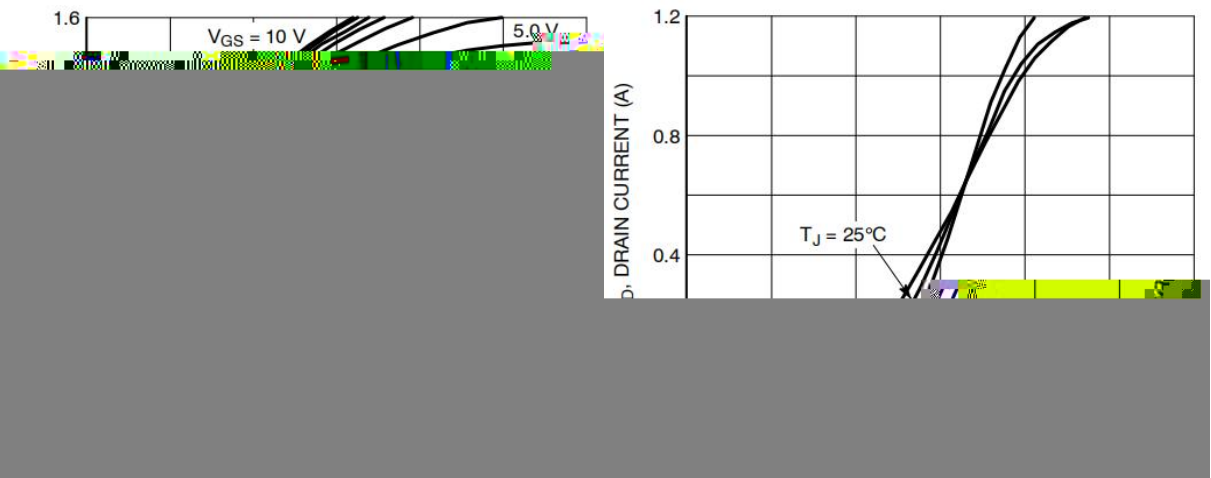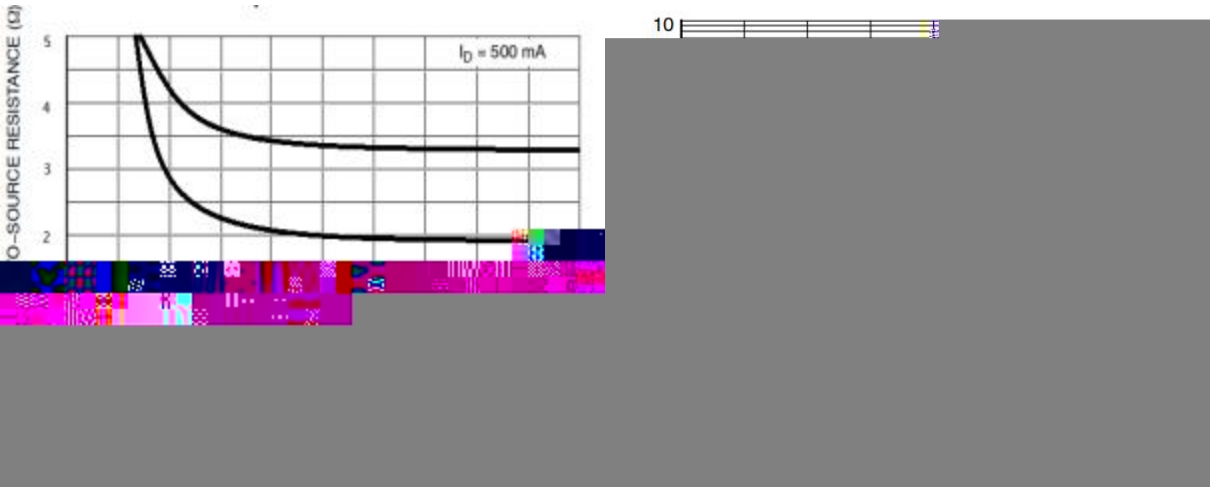



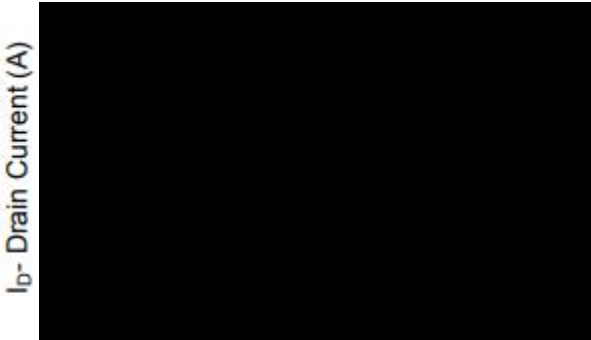

/ Electrical Characteristic Curve

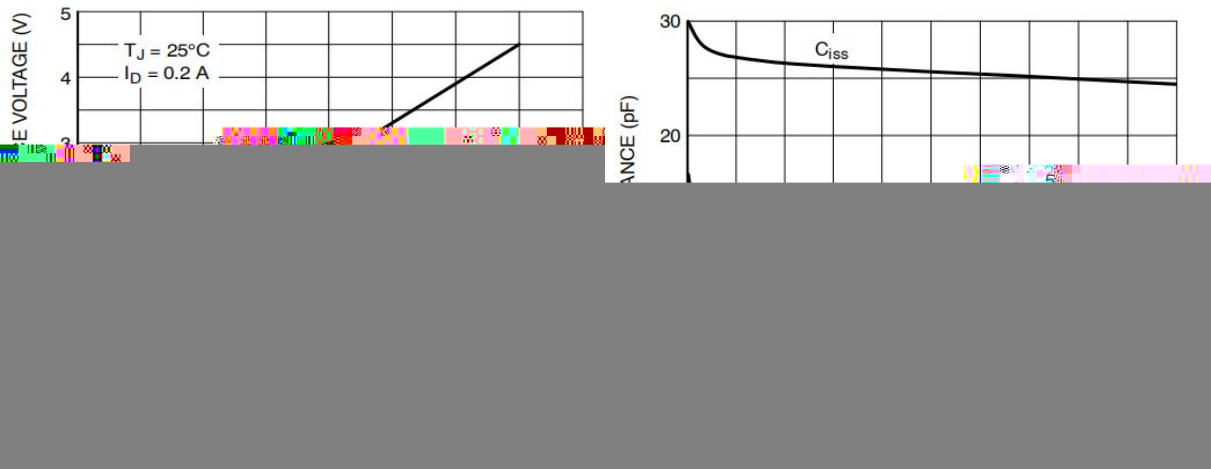



V_{DS} Drain-Source Voltage (V)
Figure 9 : Safe Operation Area

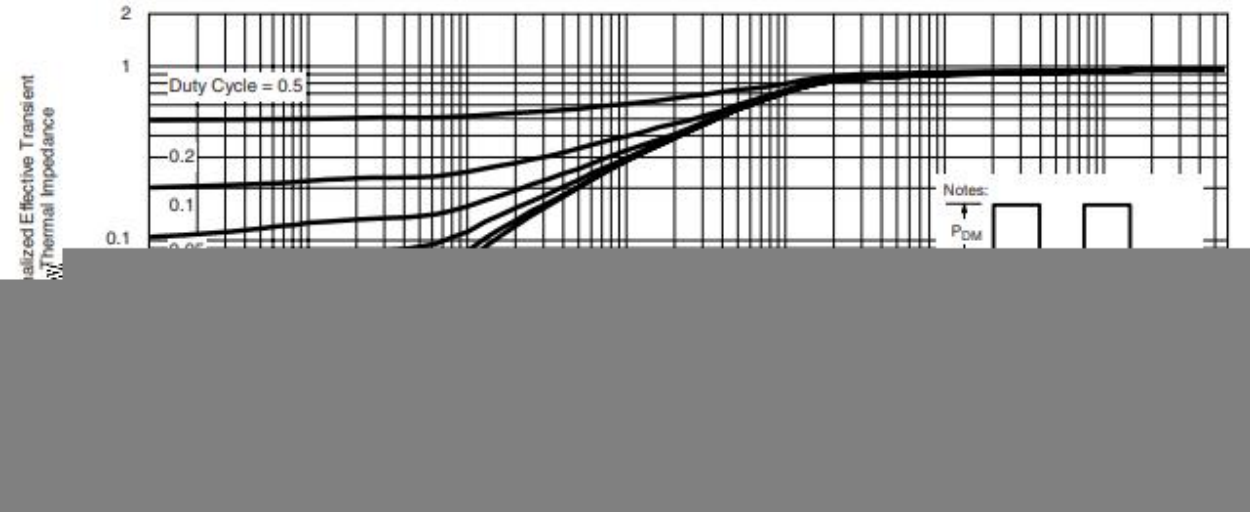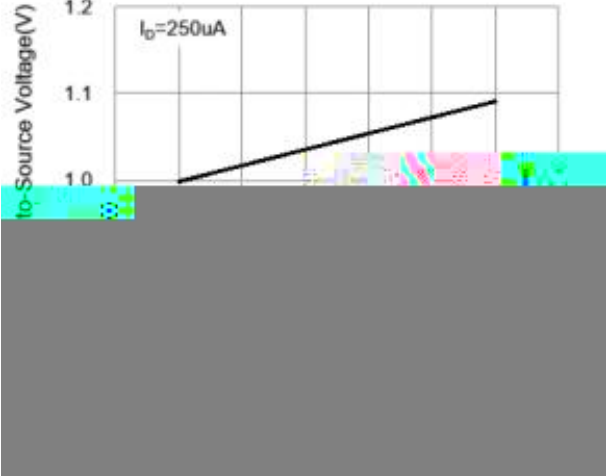



/ Package Dimensions

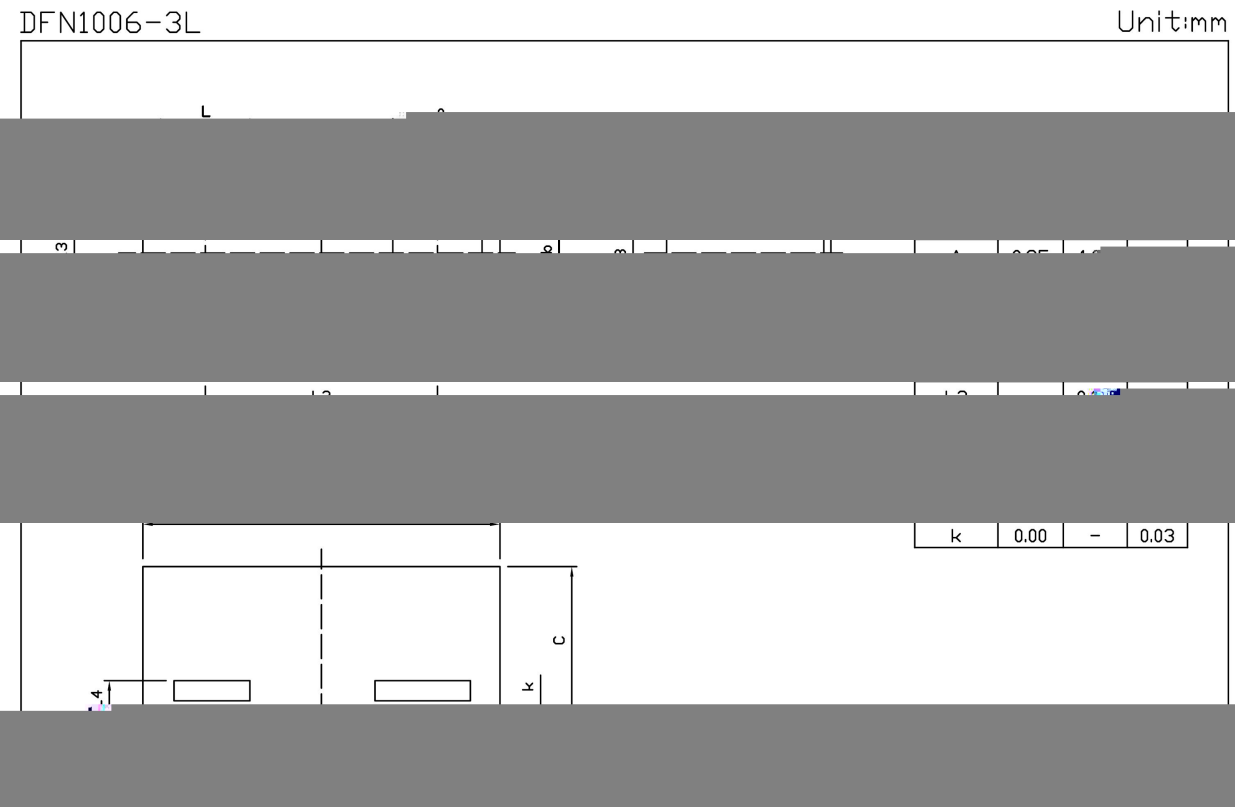



/ Marking Instructions



说明：

： 为型号代码



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

± °C

±

/ Packaging SPEC.

	包装数量	包装尺寸	:
--	------	------	---

