



x

Ω Ω
Ω Ω

LED

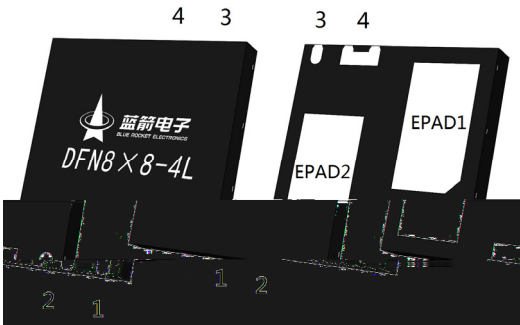

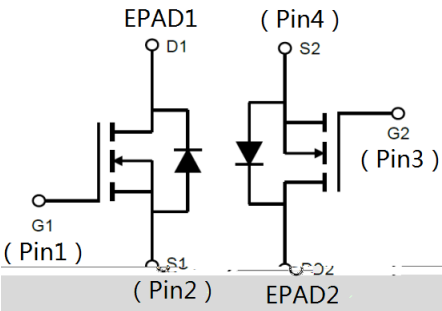

	θ		



		μ				
						μ
						μ
		μ				
						Ω
						Ω



		Ω				
		μ				


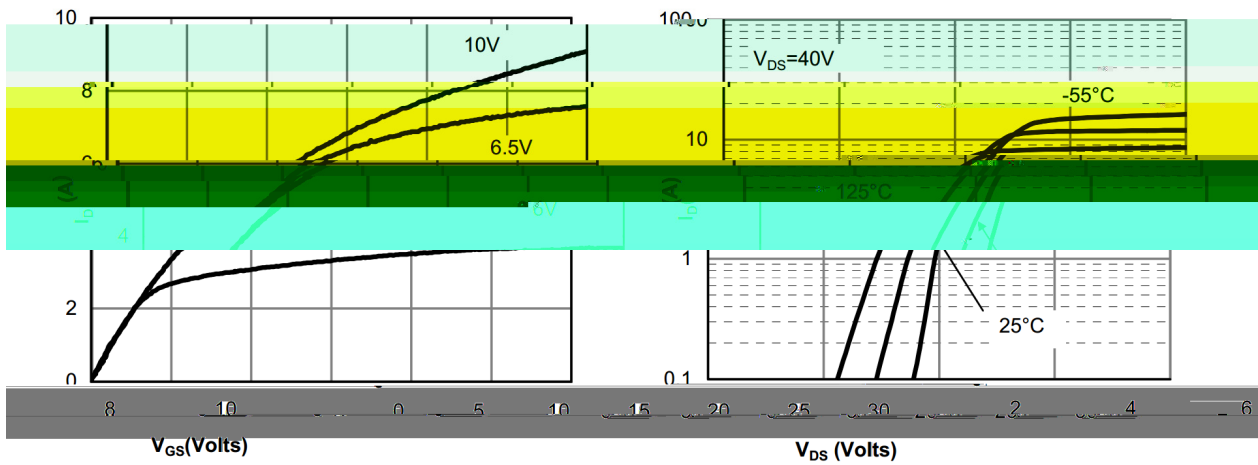


Figure 2: Transfer Characteristics

Fig 1: On-Region Characteristics

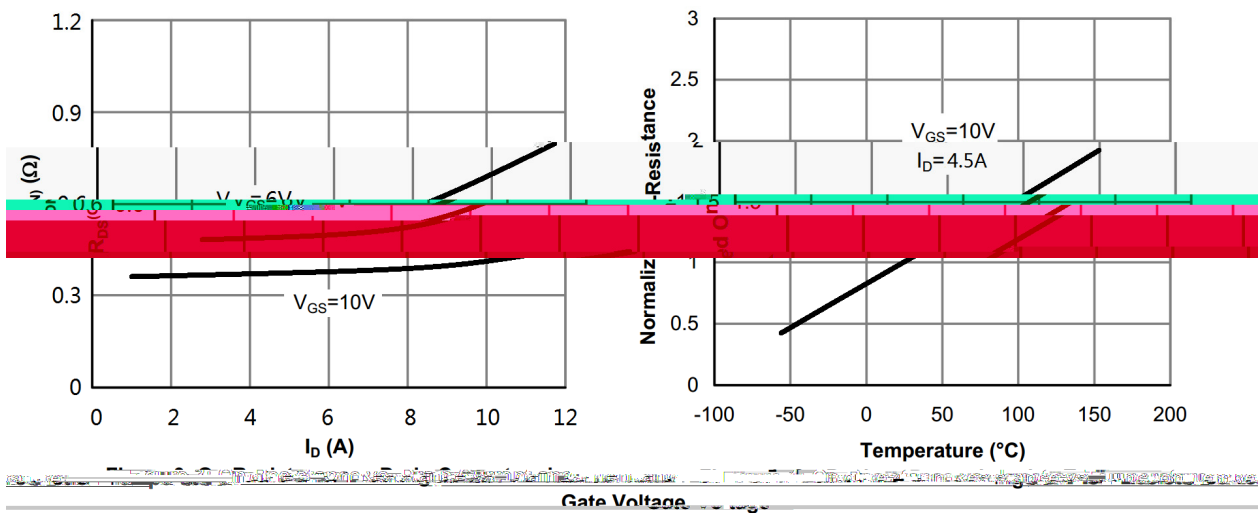

Gate Voltage

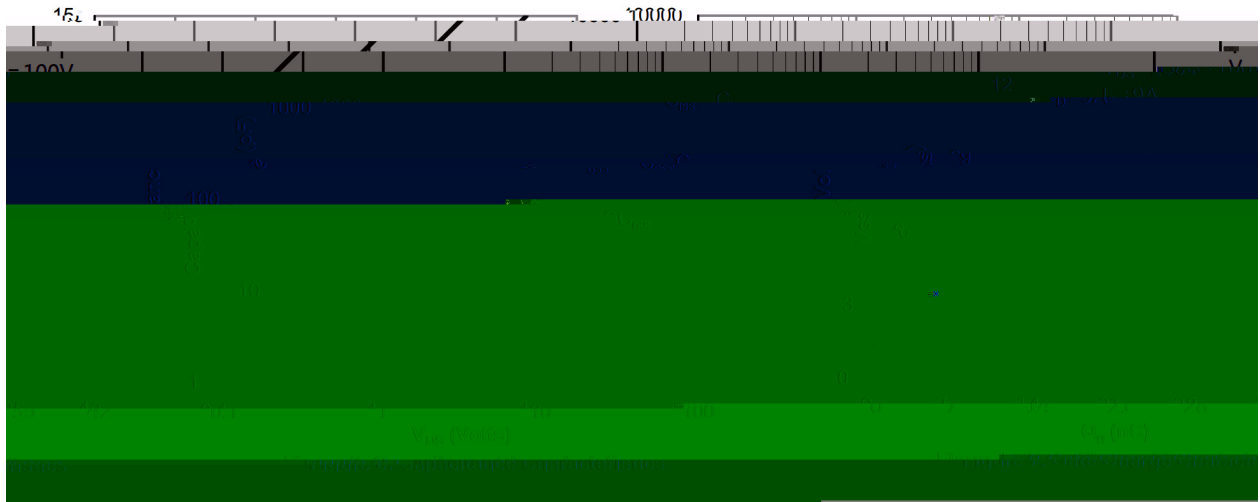


Figure 9: Maximum Forward Biased Safe Operating Area


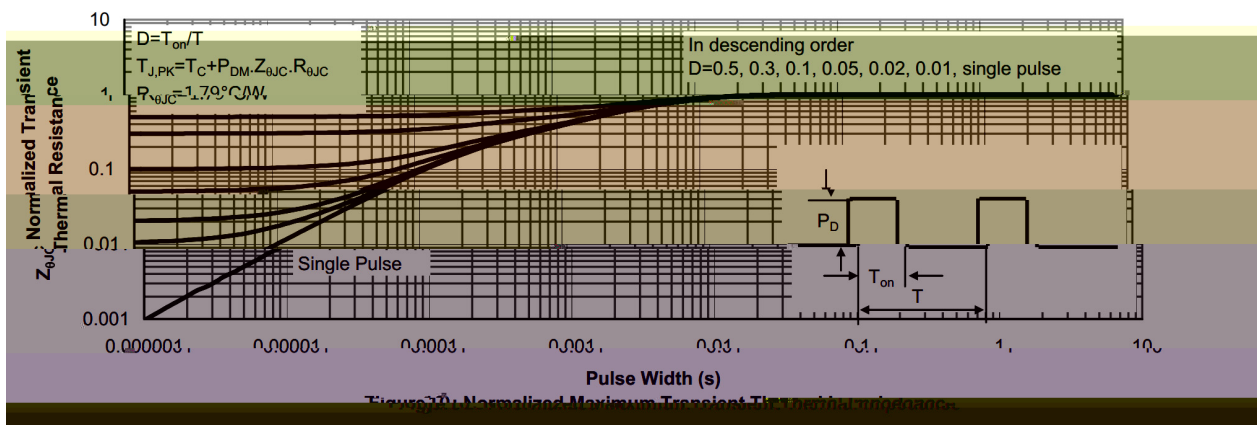


Figure 10: Normalized Maximum Transient Thermal Impedance


DFN8X8-4L

Unit:mm

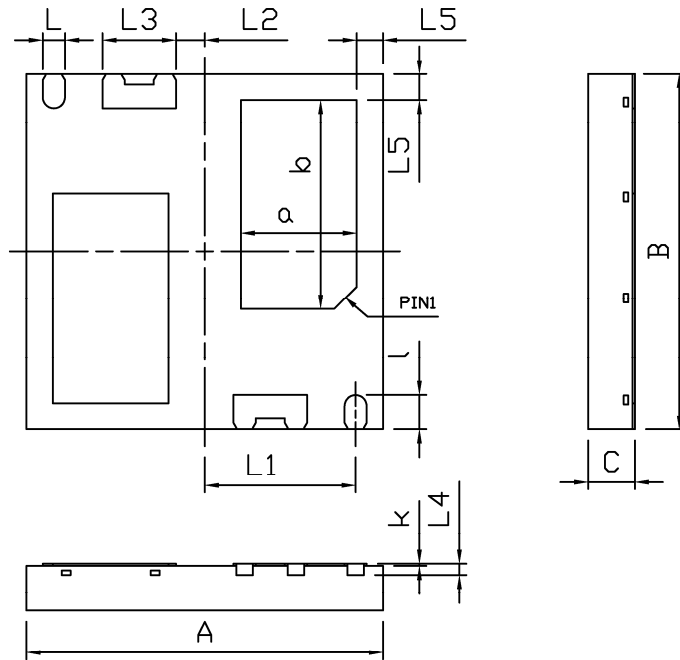

Dimensions In Millimeters			
Symbol	MIN	TYP	MAX
A	7.90	8.00	8.10
B	7.90	8.00	8.10
C	0.95	1.00	1.10
L	0.45	0.50	0.55
L1	-	3.385	-
L2	-	0.645	-
L3	1.55	1.65	1.75
L4	0.153	0.203	0.253
L5	-	0.59	-
a	2.50	2.60	2.70
b	4.61	4.71	4.81
k	0.00	-	0.05
l	0.675	0.775	0.875

Rev.00 202307



BR
9N20
