


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

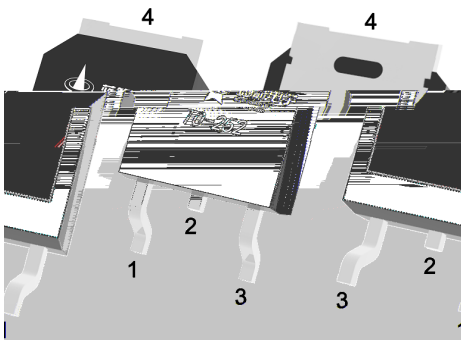

/ Marking

BRD65R650T







DATA SHEET

BRD65R650T

--	--	--	--	--	--	--

/ Electrical Characteristic Curve

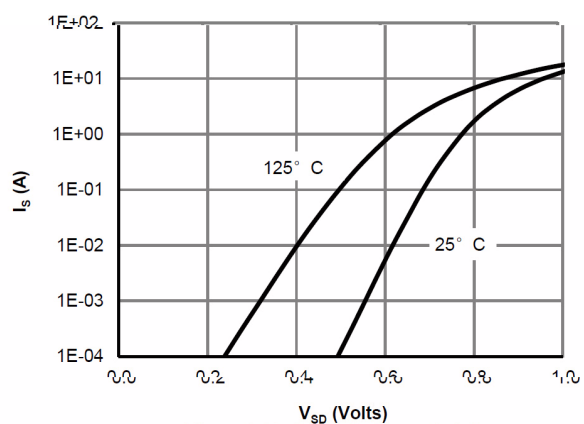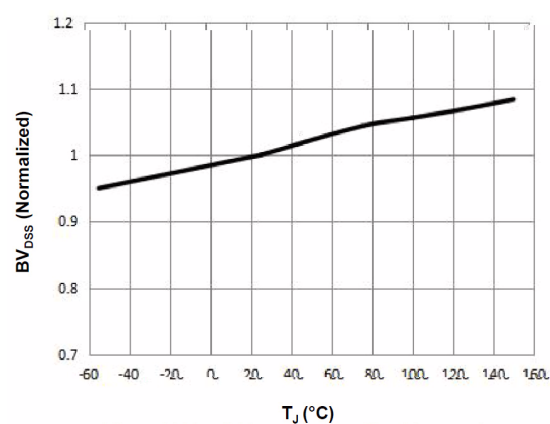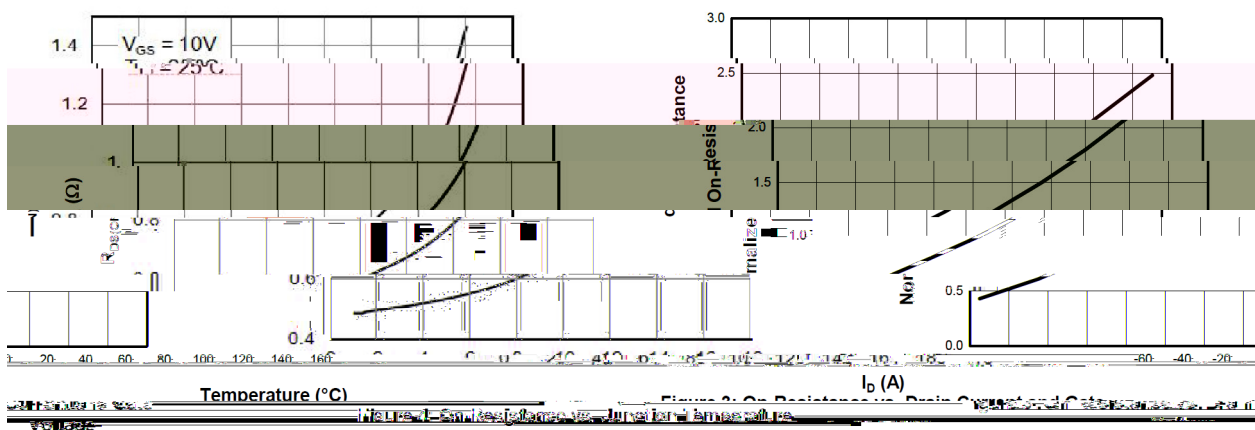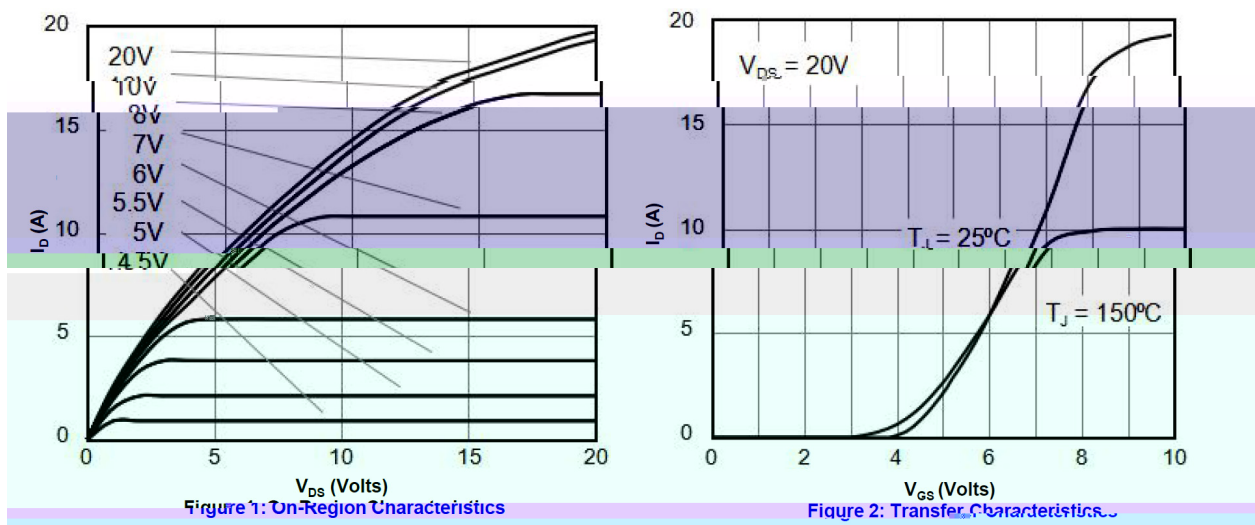

/ Electrical Characteristic Curve




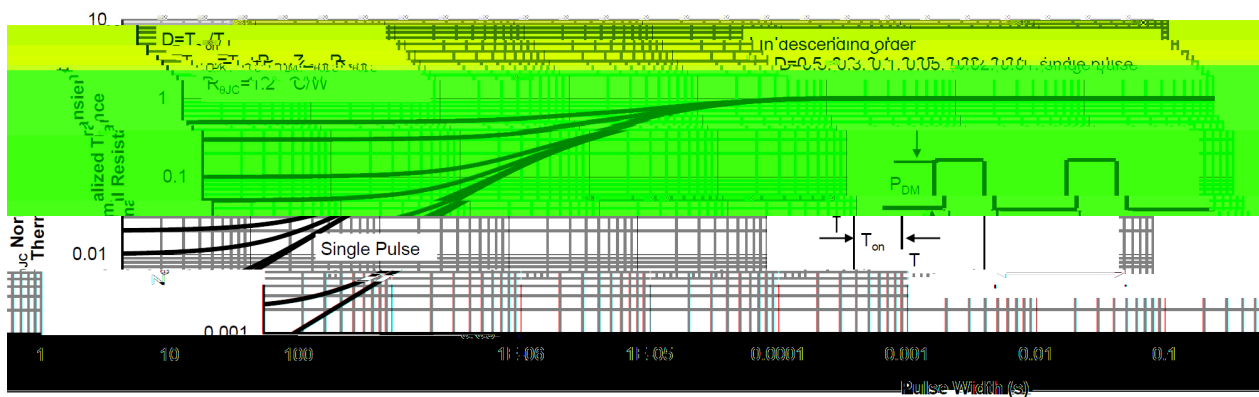


Figure 10: Normalized Maximum Transient Thermal Impedance

/ Package Dimensions

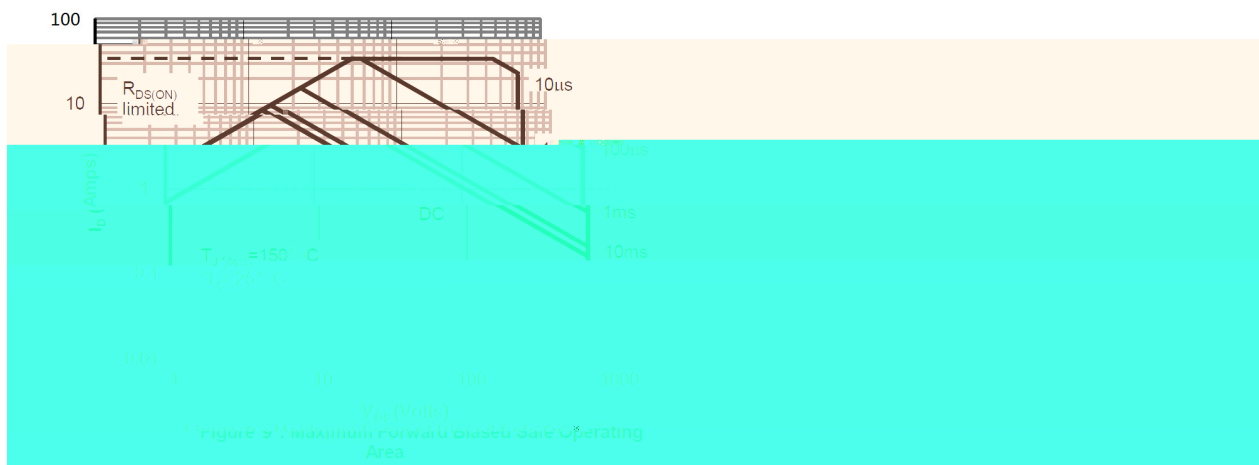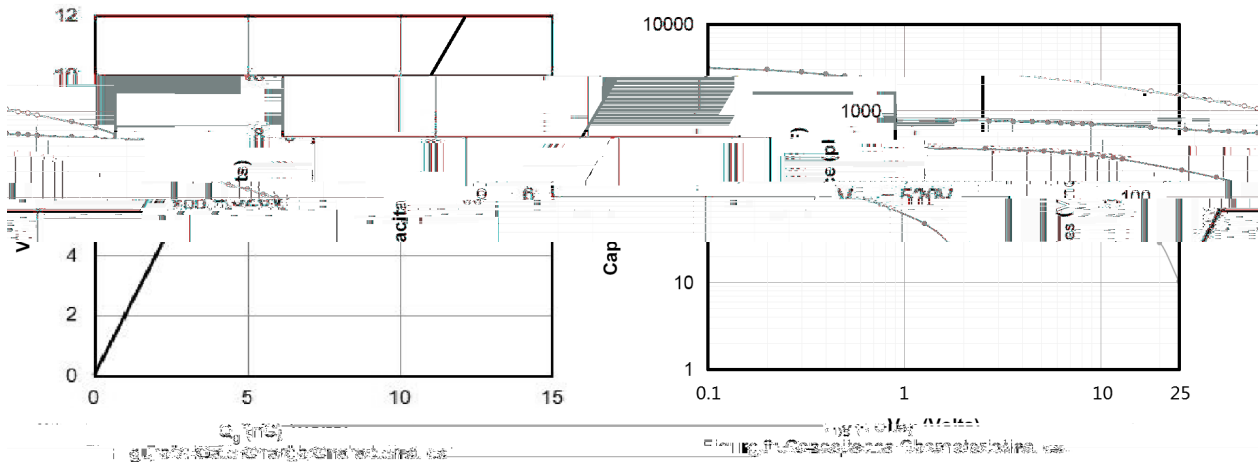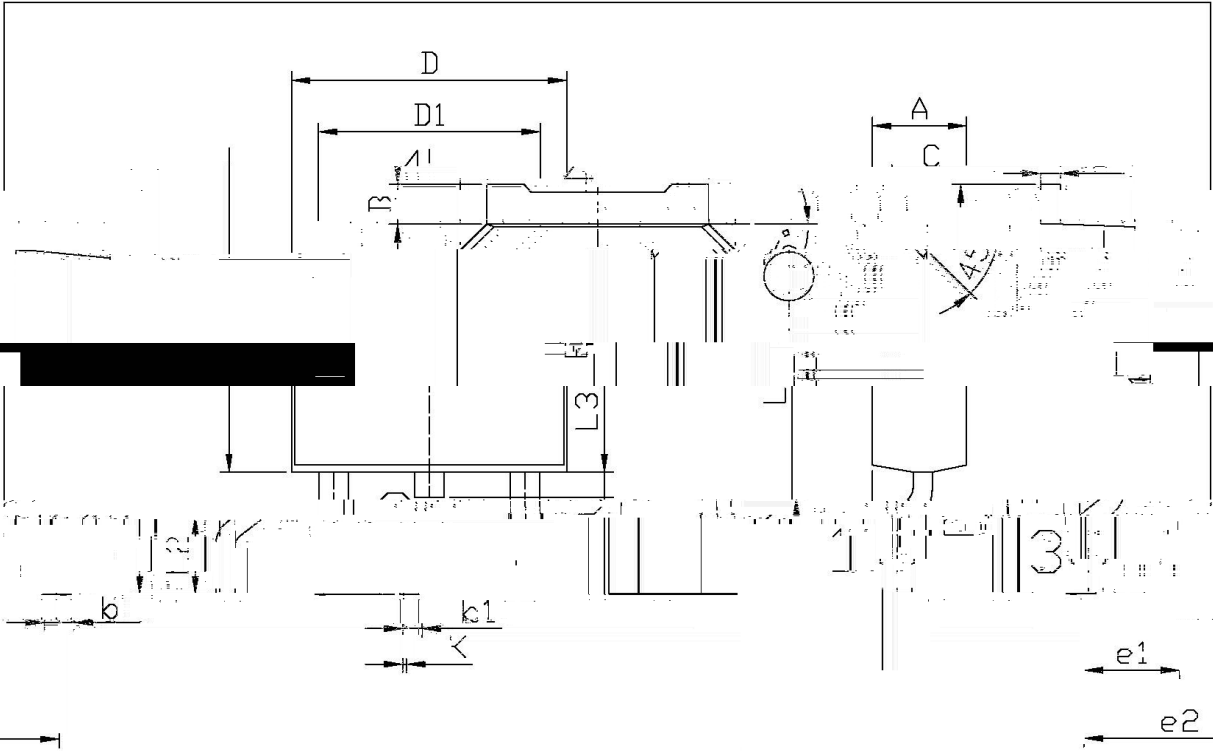


单位: mm

Symbol			Dimensions In Millimeters			Symbol			Dimensions In Millimeters		
			Min		Max				Min		Max
A	6.25					A	2.20		2.40		
e1	2.24		2.34			B	0.95		1.25		
L3	4.62		4.73			b1	0.70		0.80		
D1	9.85		10.35			b	0.45				
f	0.45		0.55			L	1.70		2.00		
L3	0.60		0.90			D	6.45				
K	0.60		0.10			D1	5.10				

T0-252

/ Marking Instructions

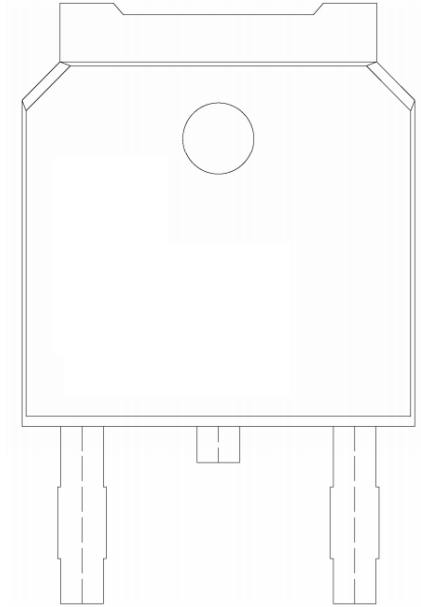

() /



/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices