


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

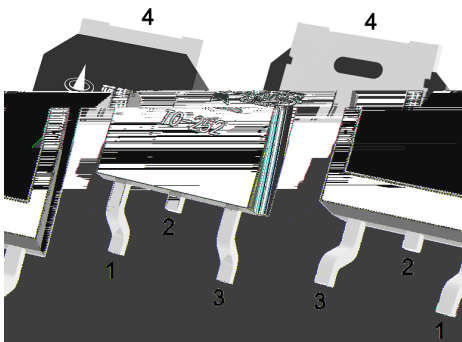

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				


/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

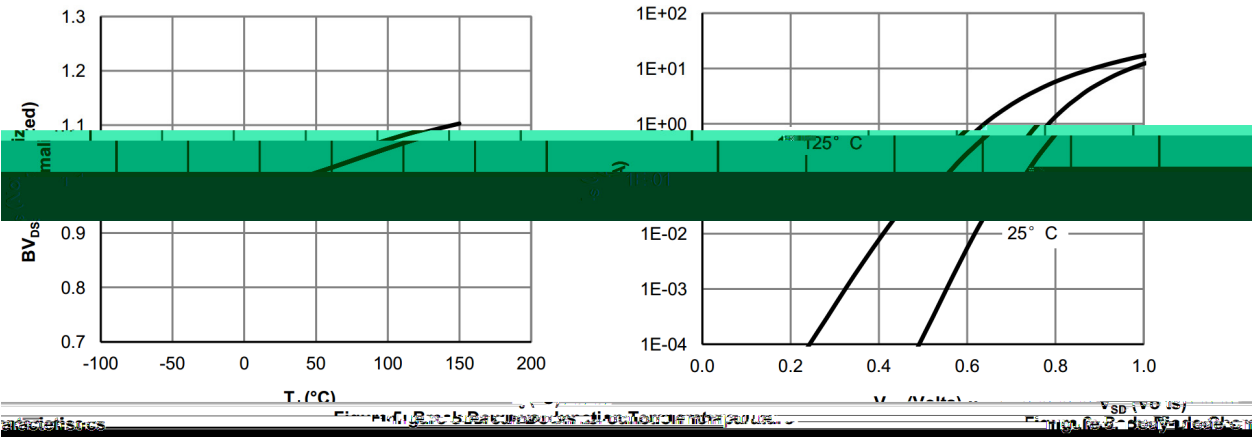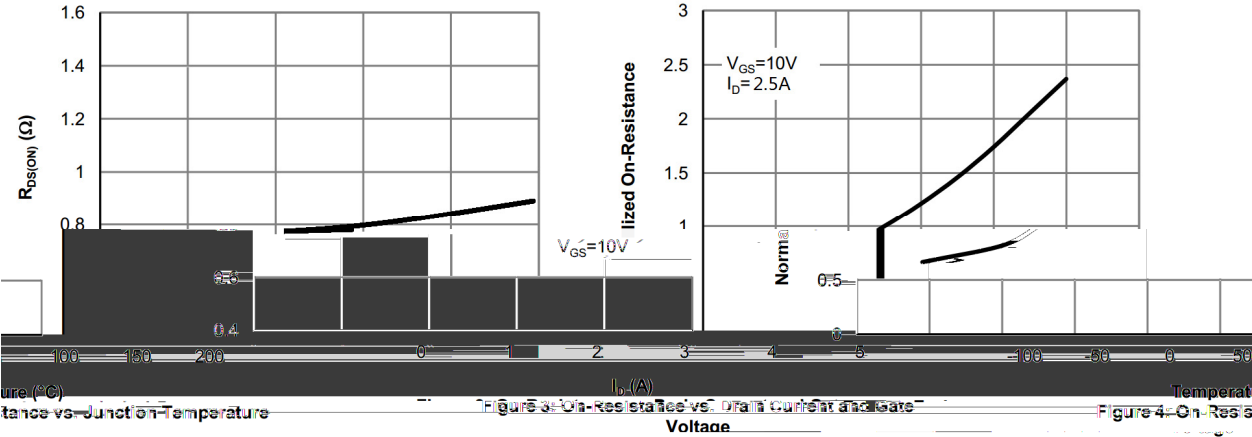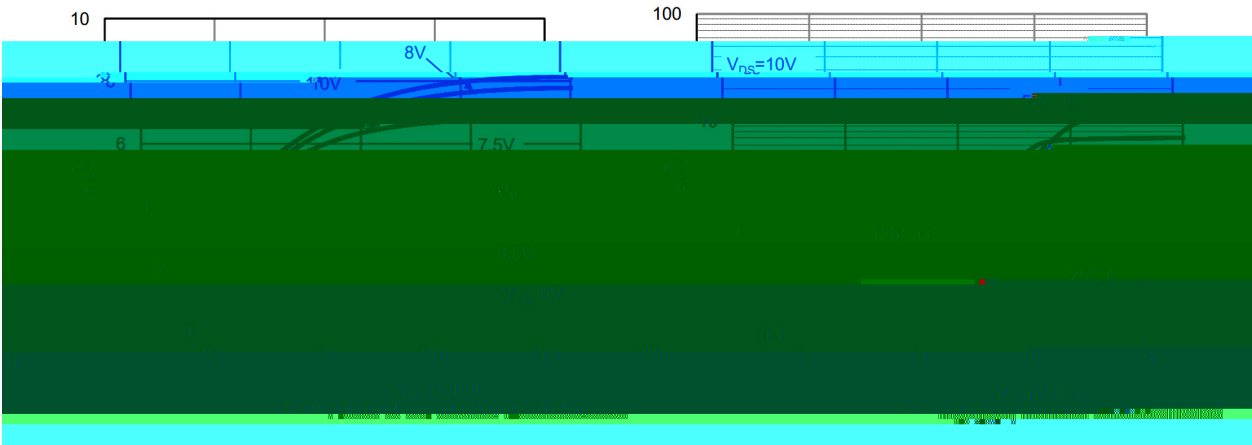

/ Package Dimensions

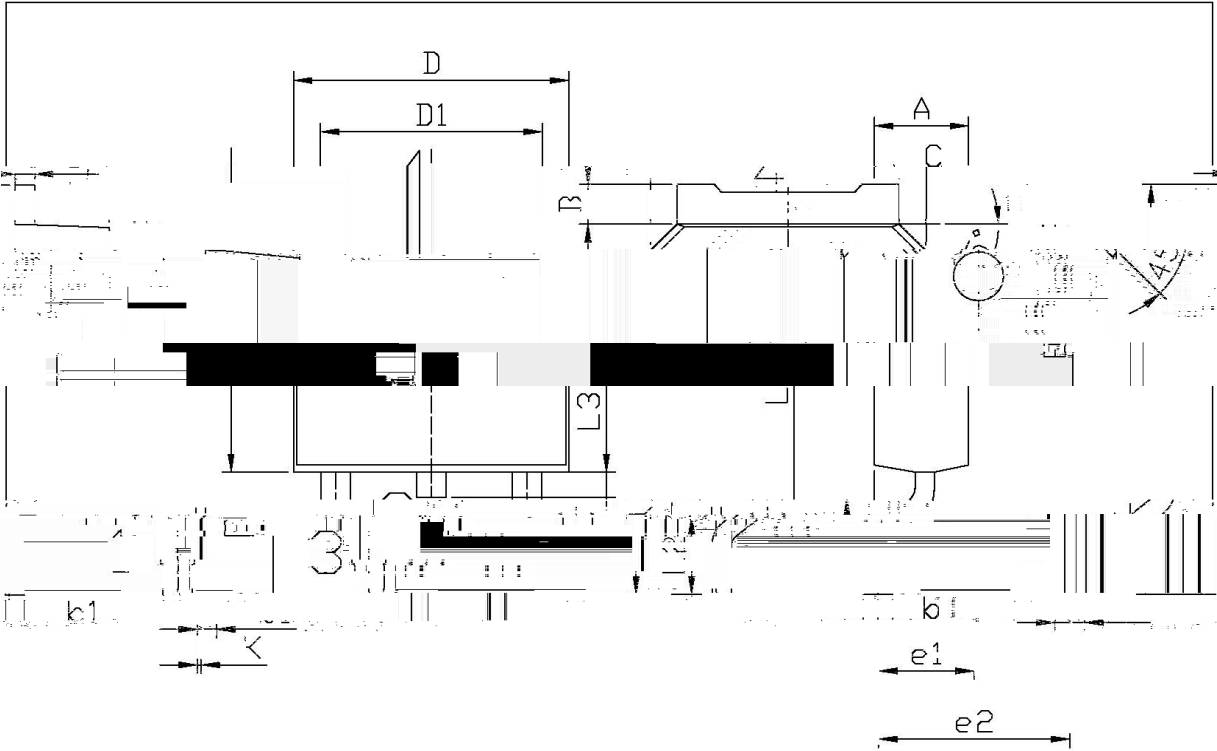


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	A1	5.95	6.25
B	2.24	2.34	B1	0.95	1.25
C	4.42	4.72	C1	0.70	0.90
D	9.85	10.35	D1	0.45	0.55
L3	0.45	0.55	L1	1.70	2.00
k	0.60	0.90	k1	6.45	6.75
e1	5.50	6.00	e2	0.10	0.20

T□-252

/ Marking Instructions

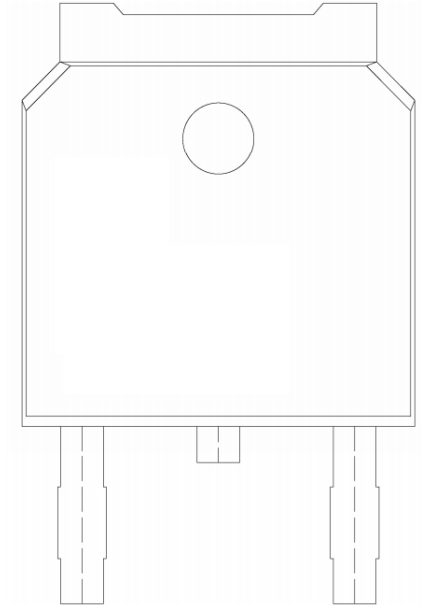

() /

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.