


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	650	V
Drain Current	$I_D(T_C=25^\circ\text{C})$	7.0	A
Drain Current	$I_D(T_C=100^\circ\text{C})$	4.4	A
Drain Current - Pulsed	I_{DM}	28	A
Gate-Source Voltage	V_{GS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	425	mJ
Avalanche Current	I_{AR}	9.9	A
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	100	W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 to 150	
Junction to Ambient	$R_{\theta JA}$	110	/W
Junction to Case	$R_{\theta JC}$	1.25	/W

/ Electrical Characteristics(Ta=25)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DS}	$V_{GS}=0V$ $I_D=250\mu A$	650	690		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V$ $V_{GS}=0V$			1.0	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 30V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	2.0	3.2	4.0	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=3.5A$		1.1	1.5	Ω
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		1000		pF
Output Capacitance	C_{oss}			180		
Reverse Transfer Capacitance	C_{rss}			4		
Total Gate Charge	Q_G	$V_{DS}=520V$ $I_D=7.0A$, $V_{GS}=10V$		30		nC
Gate-Source Charge	Q_{GS}			10		
Gate-Drain Charge	Q_{GD}			21		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD}=325V$ $I_D=7.0A$ $R_G=25\Omega$ $V_{GS}=10V$		52		ns
Turn-On Rise Time	t_r			160		
Turn-Off Delay Time	$t_{d(off)}$			400		
Turn-Off Fall Time	t_f			190		
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$, $I_S=7.0A$			1.4	V

/ Electrical Characteristic Curve

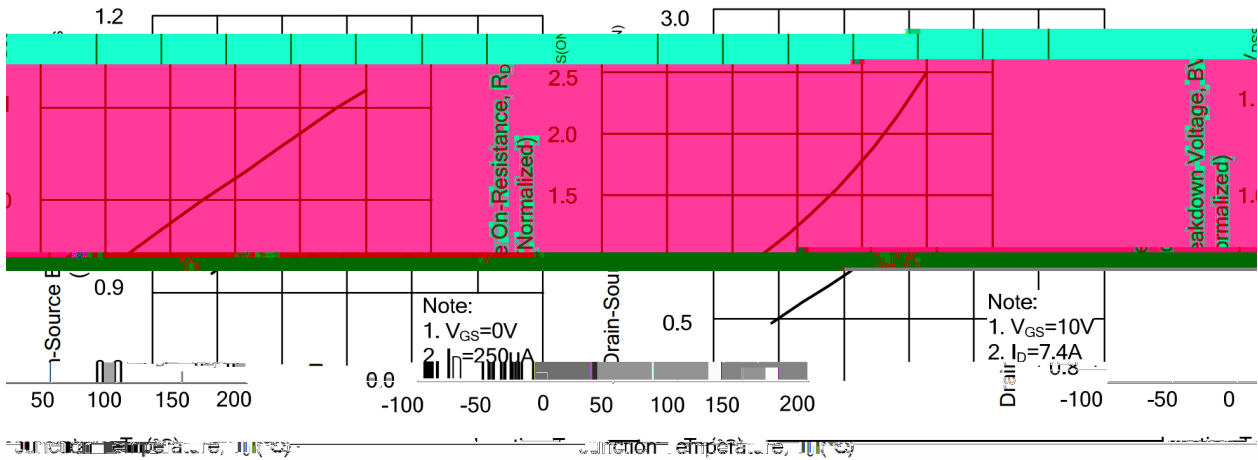


1. Breakdown Voltage Variation vs. Junction Temperature


2. On-Resistance Variation vs. Junction Temperature

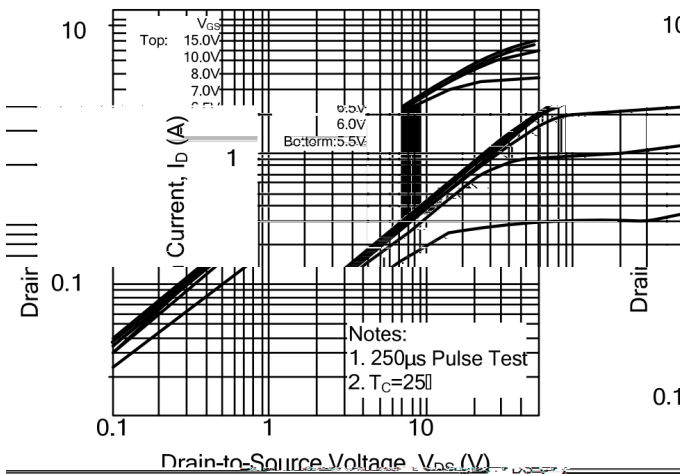


3. On State Characteristics

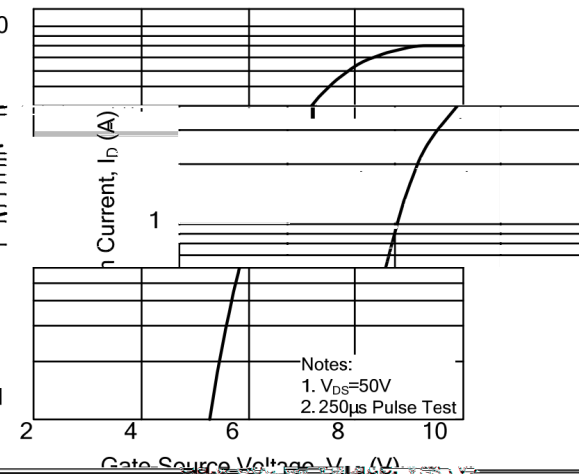

4. Transfer Characteristics

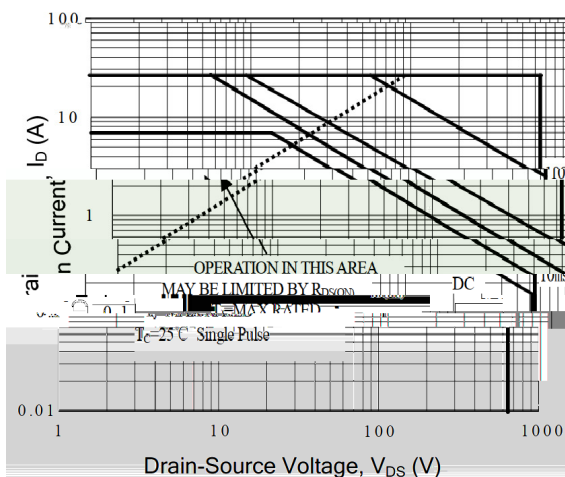


5. Safe Operating Area

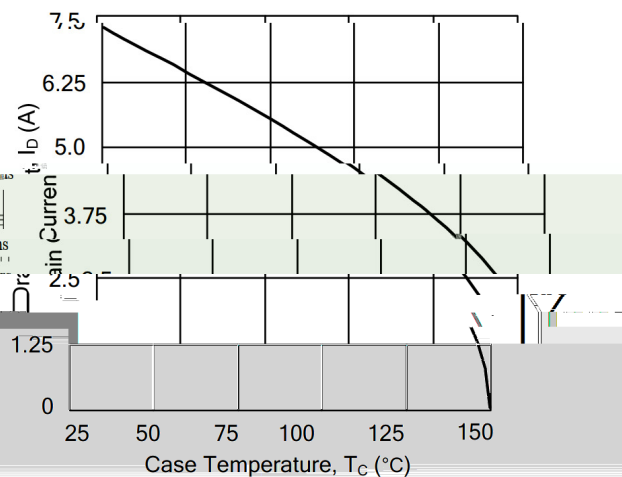

6. Maximum Drain Current vs. Case Temperature

/ Package Dimensions

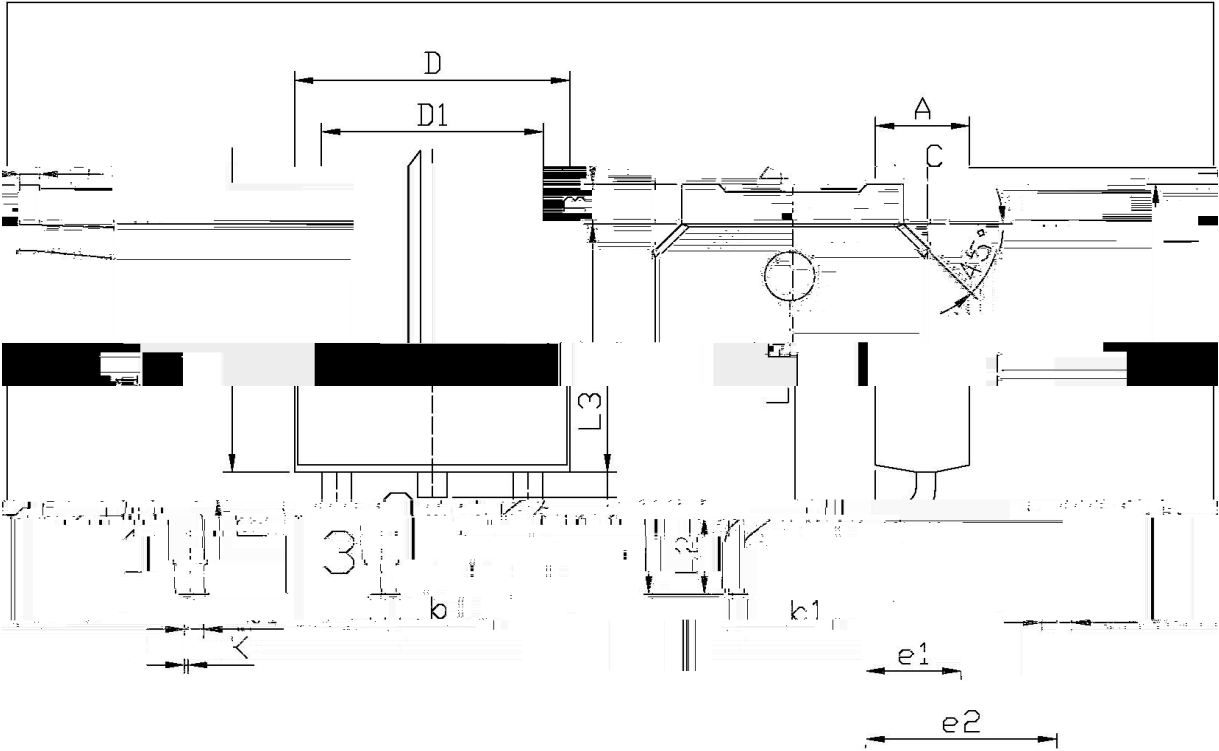


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	5.95	6.25	A	2.20	2.40
B	2.24	2.34	B	0.95	1.25
C	4.49	4.73	C	0.70	0.90
D	9.85	10.35	D	6.45	6.75
E	0.45	0.55	E	1.70	2.00
F	0.60	0.90	F	5.10	5.40
G	0.00	0.10	G	5.10	5.40

T0-252

/ Marking Instructions

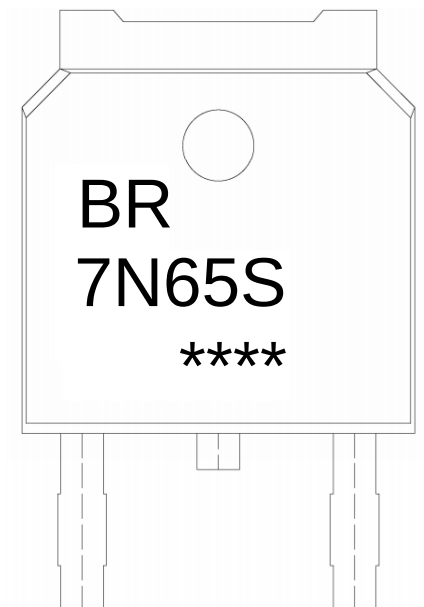

BR

7N65S


Note:

BR: Company Code

7N65S: Product Type Code

****: Lot No. Code, code change with Lot No

() /

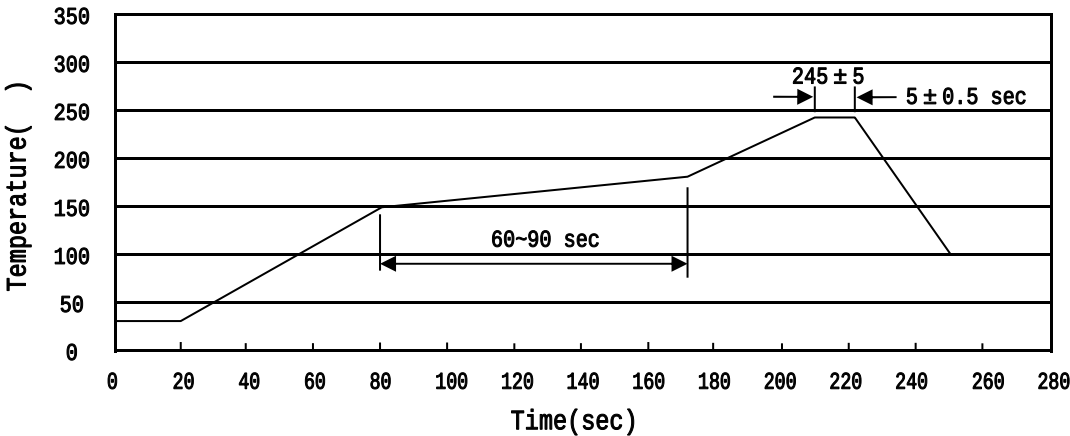

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13 ×16	360×360×50	380×335×366

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices