


/ Descriptions

SOT-363 PNP+NPN


/ Features

/ Applications

/ Equivalent Circuit

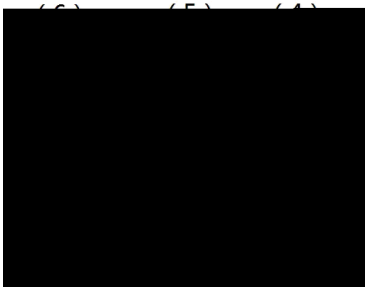

/ Pinning

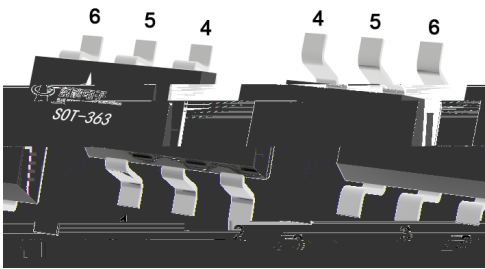

/ hFE Classifications & Marking


/ Absolute Maximum Ratings(Ta=25) (NPN)

/ Absolute Maximum Ratings(Ta=25) (PNP)


						μ

						μ


/ Electrical Characteristic Curve (NPN)

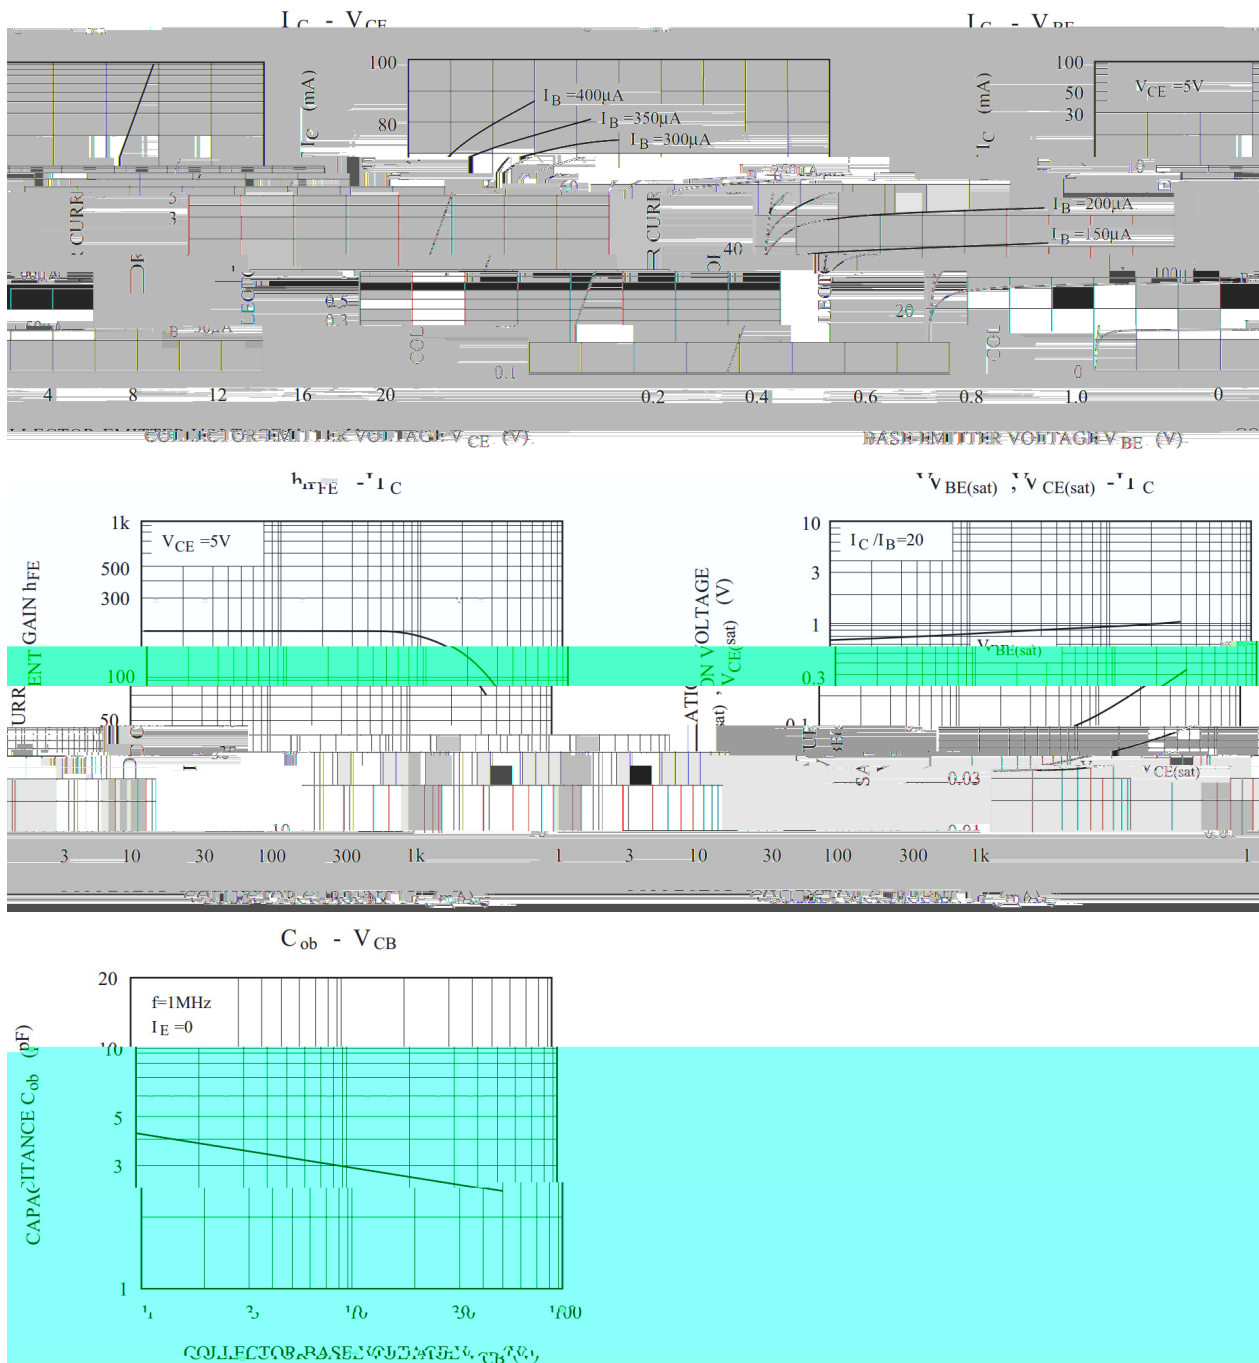


/ Electrical Characteristic Curve (PNP)

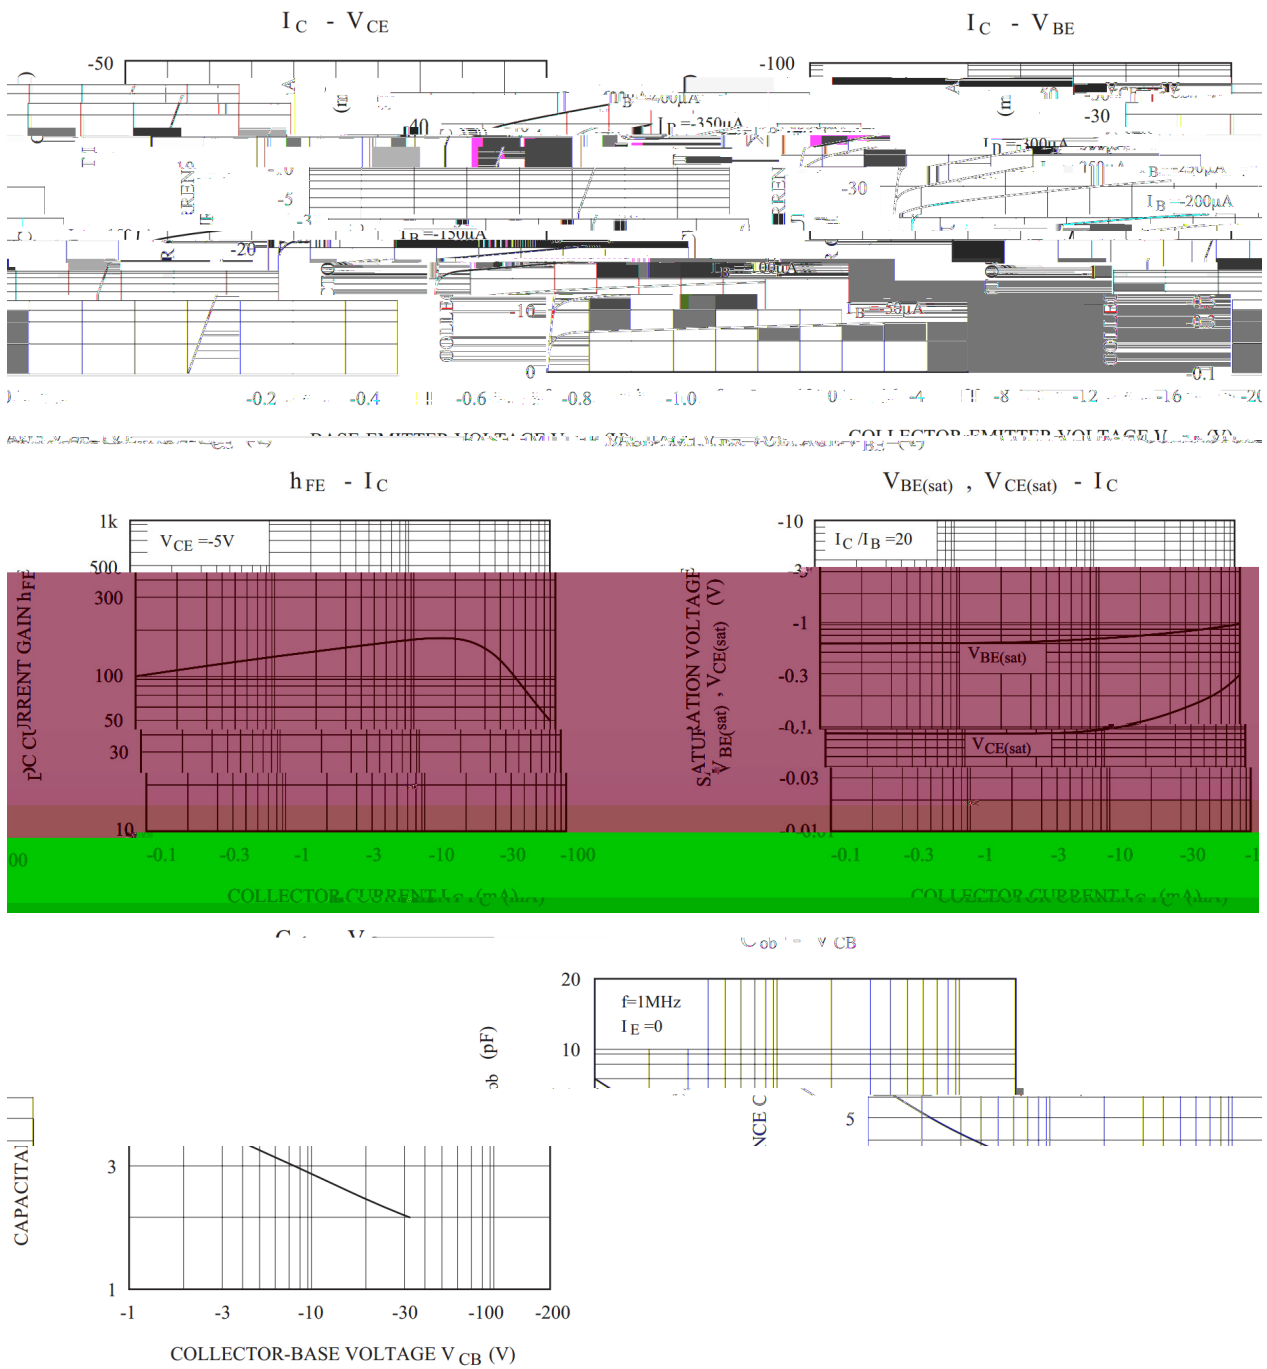

/ Package Dimensions

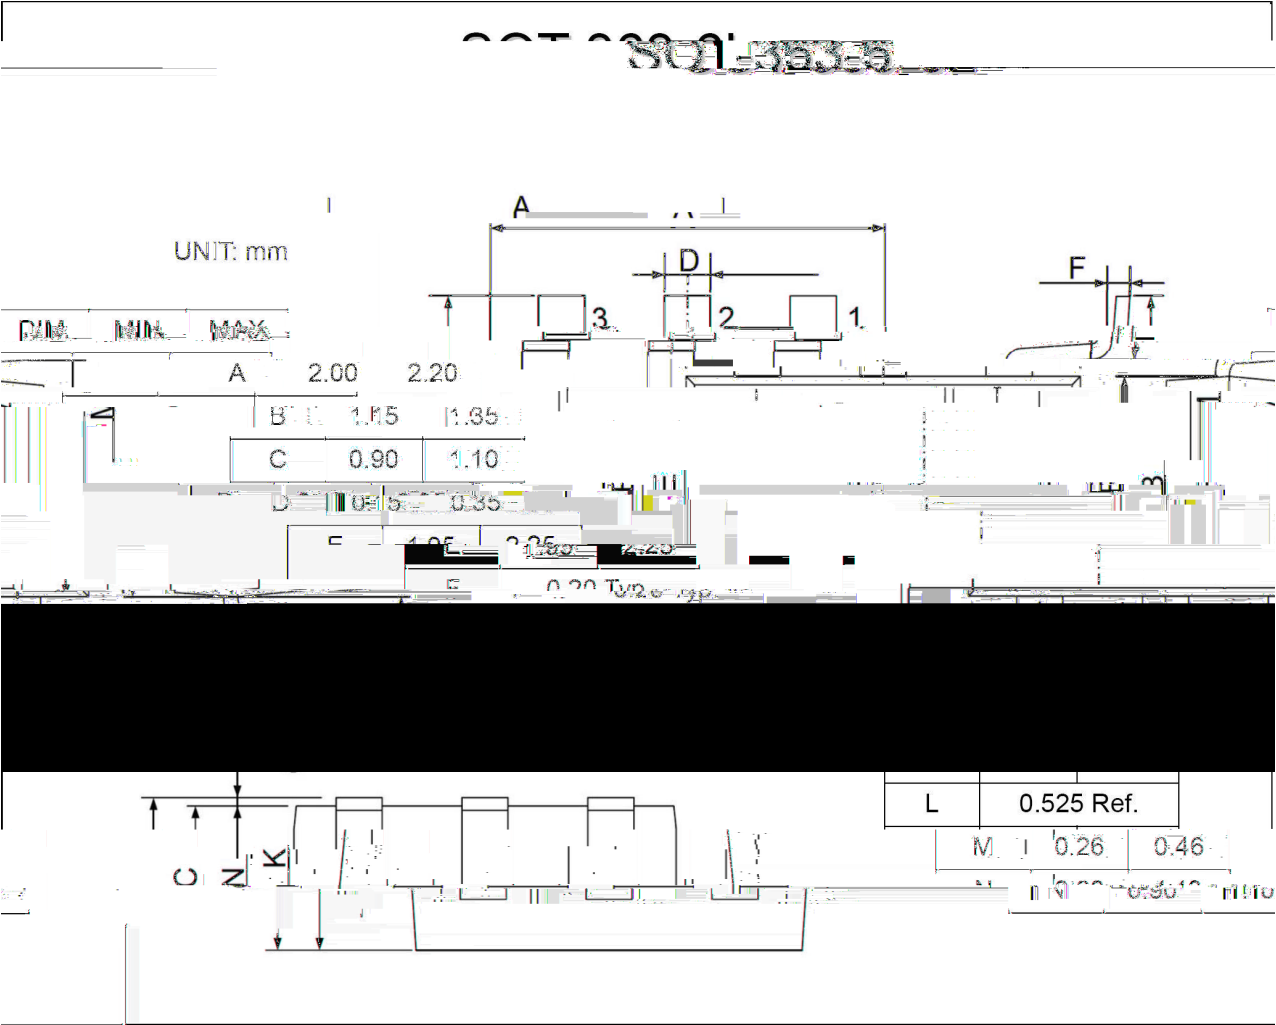

/ Marking Instructions

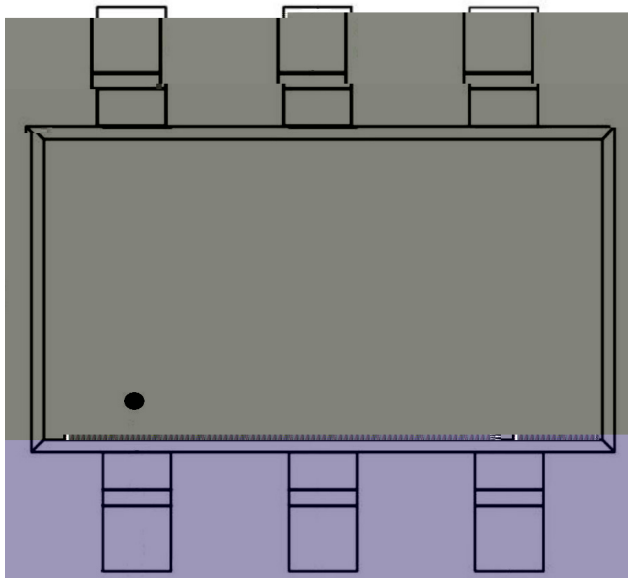

● “ 1 ”


FF

***:

● “ 1 ” Pin

FF

***:

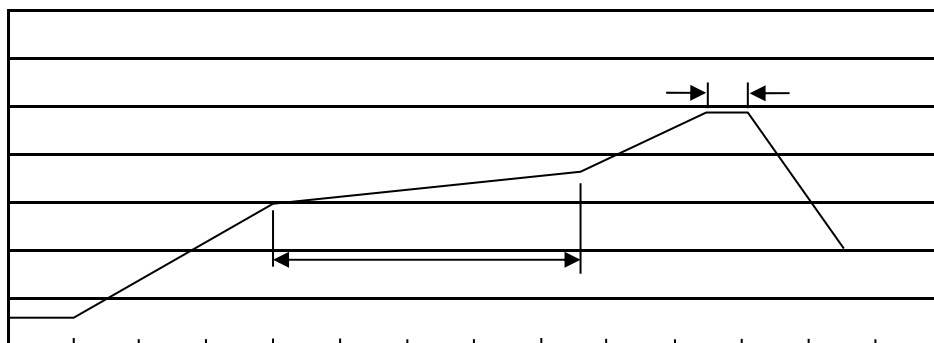 $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ / **Packaging SPEC.**

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices