
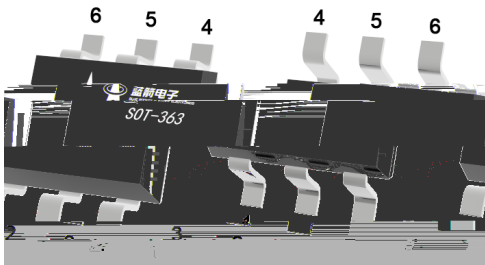


SOT-363 PNP
Double silicon PNP transistor in a SOT-363 Plastic Package.

， BRDBC846WS
High voltage, complementary pair with BRDBC846WS, HF Product.


General purpose high voltage amplifier.





PIN 1 4 Emitter PIN 2 5 Base PIN 3 6 Collector

h _{FE} Classifications Symbol	A	B
h _{FE} Range	125~250	220~475
Marking	3A	3B

Parameter

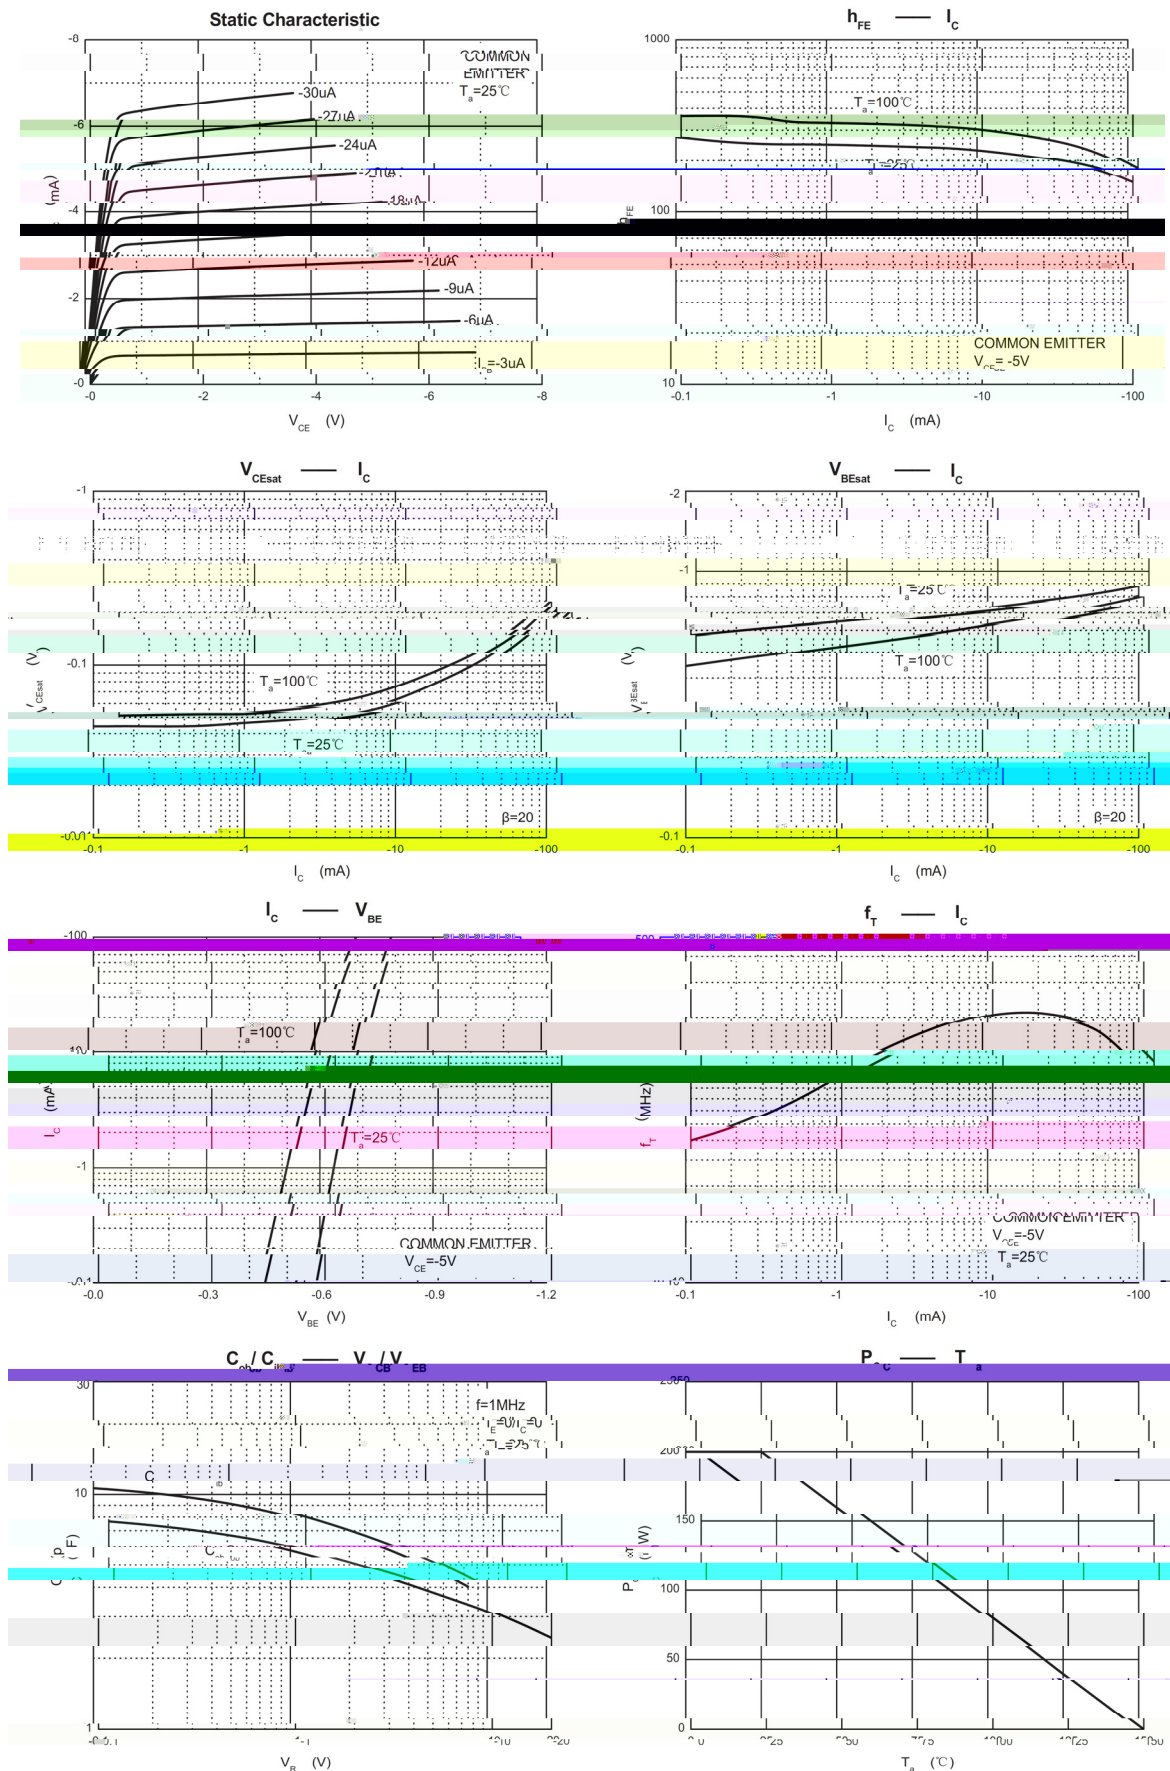

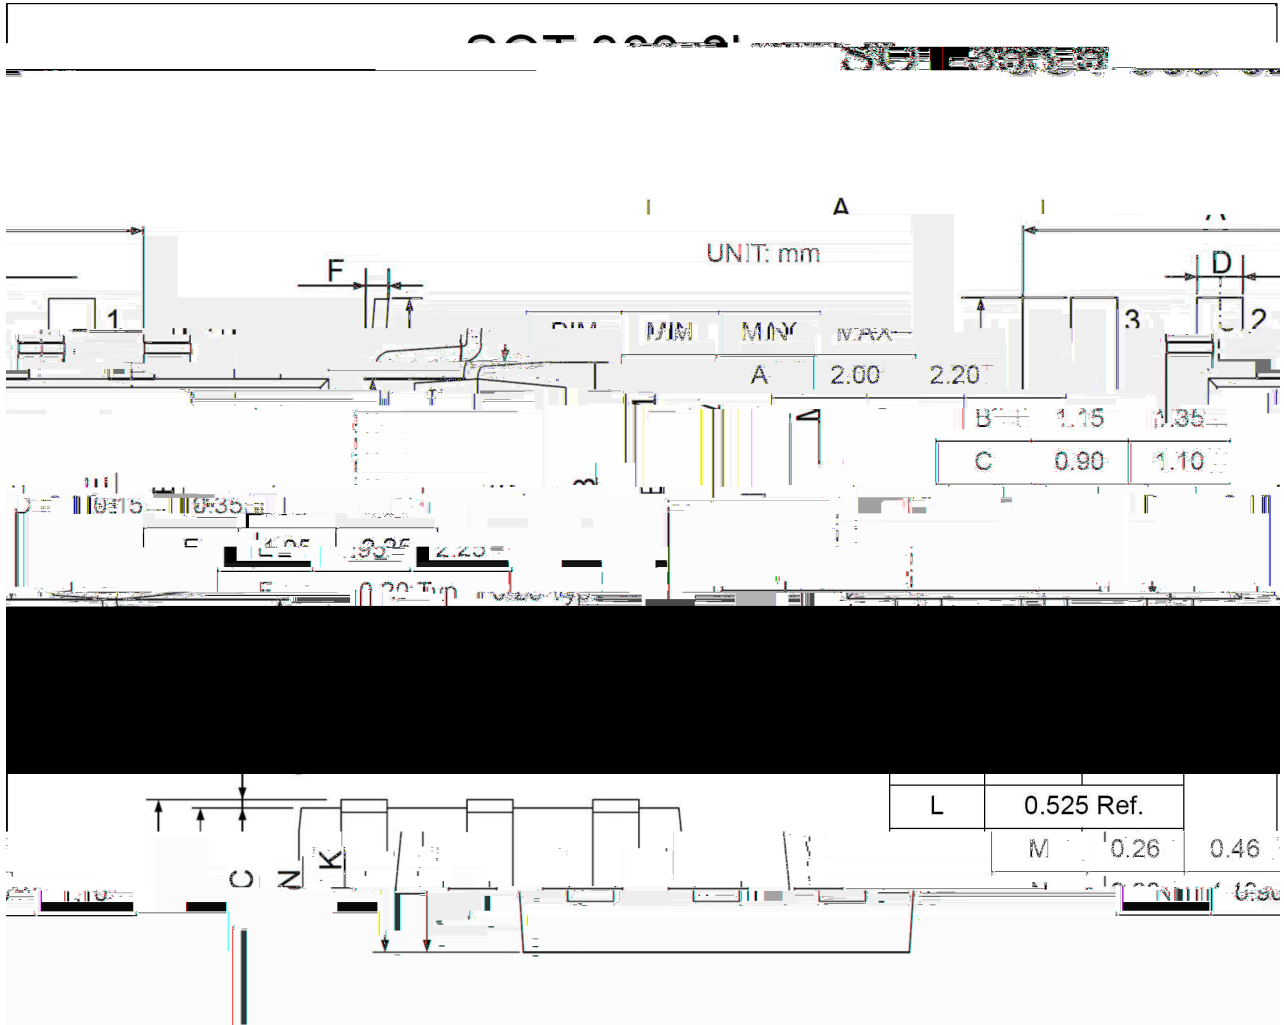

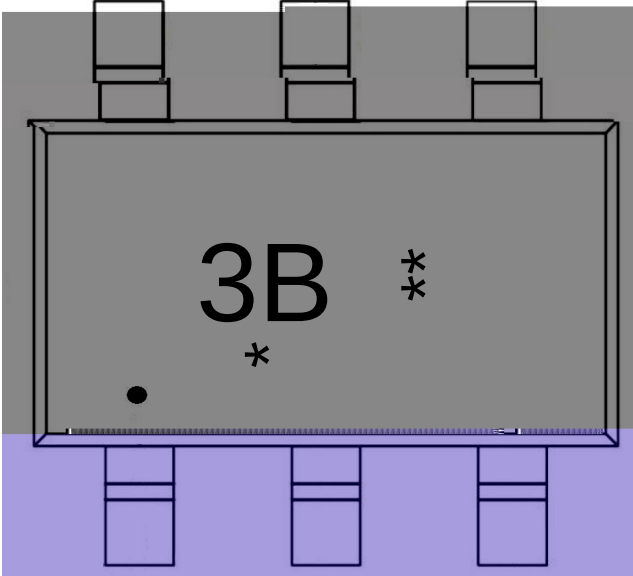


- “ 1 ”
- 3
- B h_{FE}
- ***

Note:

- “ 1 ” Pin
- 3 Product Type Code
- B h_{FE} Classifications Symbol Code
- *** Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

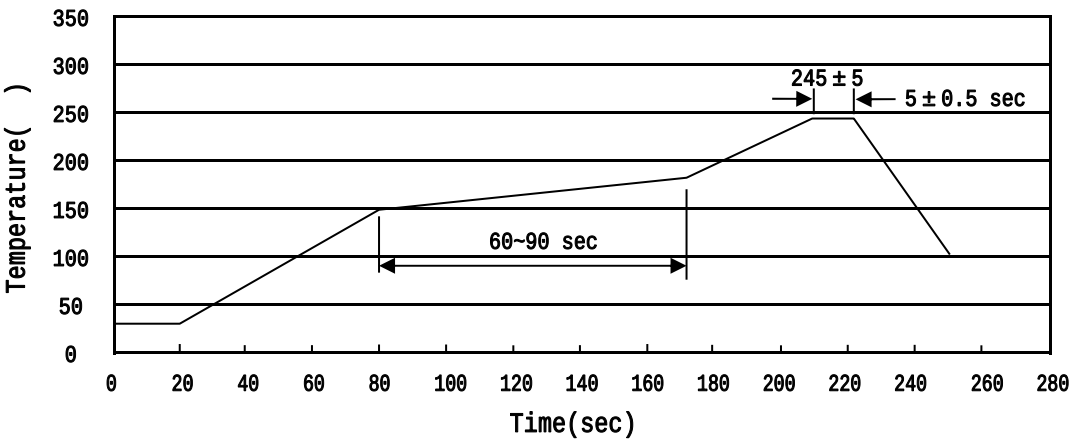

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-363	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205