


ESD

/ Features


 μ

/ Applications

/ Equivalent Circuit



/ Pinning

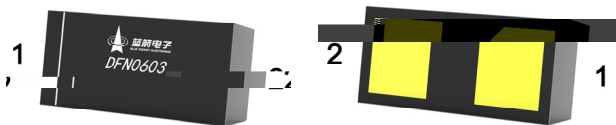


/ Marking

/ Absolute Maximum Ratings

μ			
μ			
		$\pm$	
		$\pm$	

/ Electrical Characteristics(Ta=25)

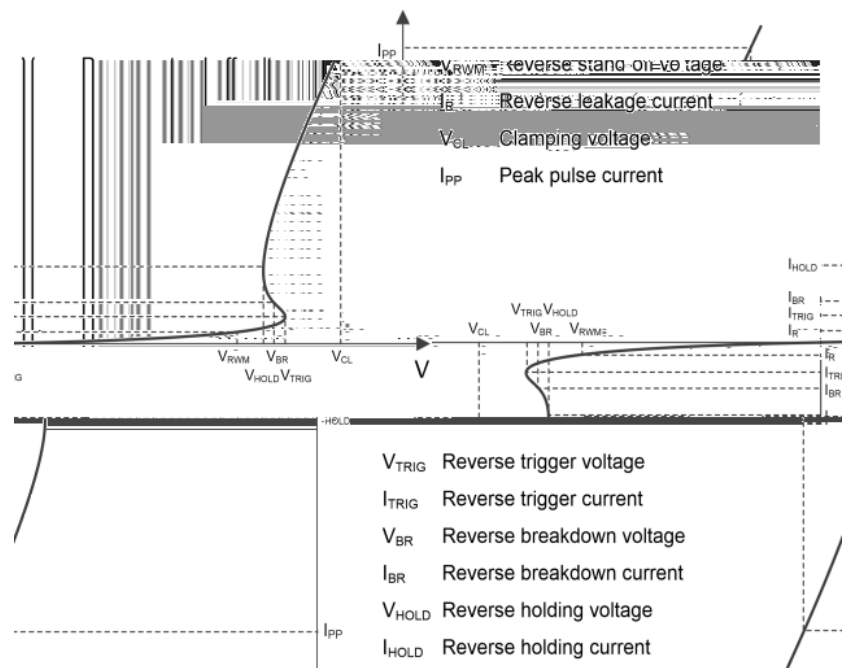


Definitions of electrical characteristics

						Ω
		μ				
		μ				

- Notes:
- 1) TLP parameter: $Z_0 = 50\Omega$, $t_p = 100ns$, $t_r = 2ns$, averaging window from 60ns to 80ns. RDYN is calculated from 4A to 16A.
 - 2) Contact discharge mode, according to IEC61000-4-2.
 - 3) Non-repetitive current pulse, according to IEC61000-4-5.


/ Electrical Characteristic Curve($T_a=25^\circ\text{C}$)

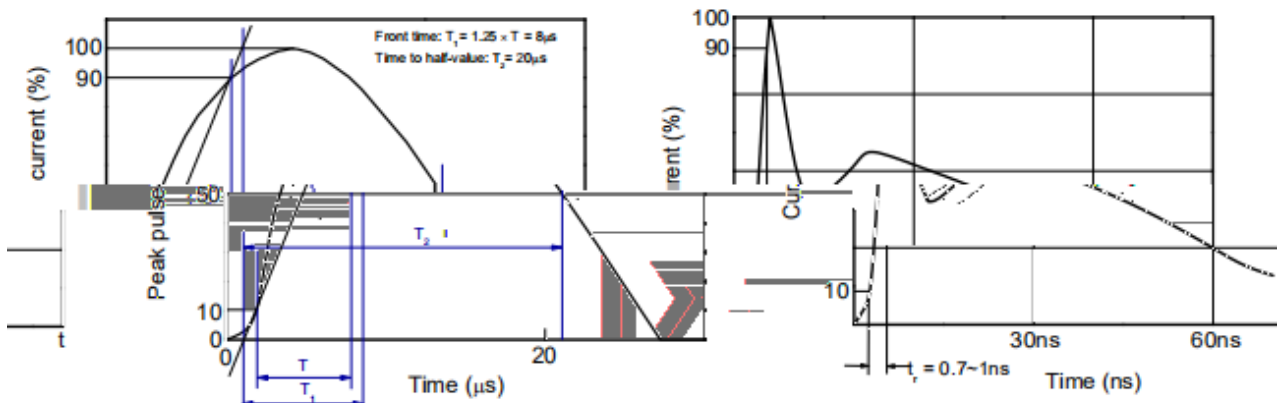


IEC61000-4-2

8/20 μs waveform per IEC61000-4-5


Contact discharge current waveform per IEC

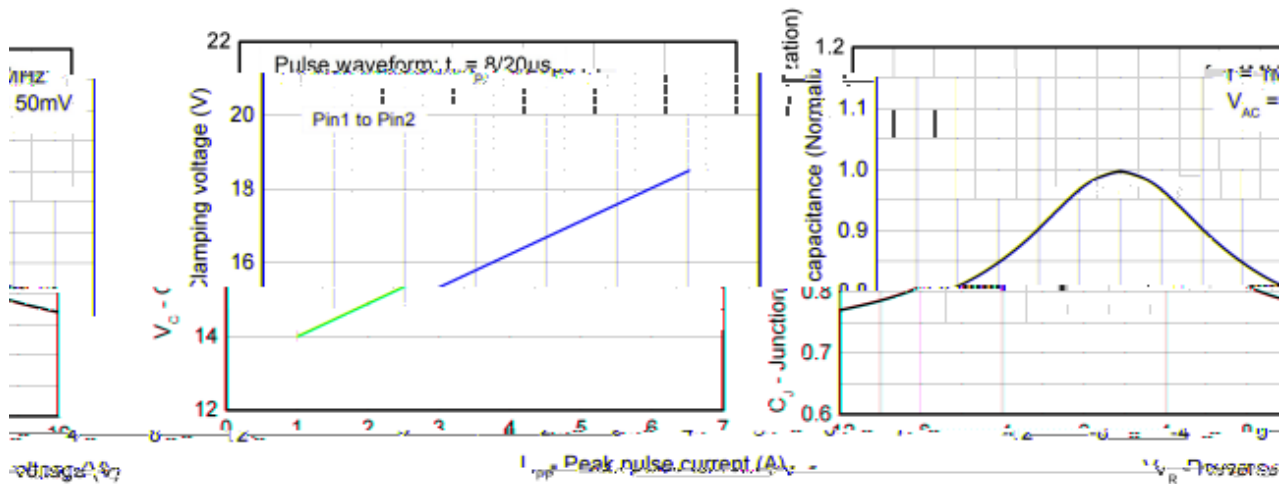

capacitance vs. reverse voltage clamping voltage vs. peak pulse current

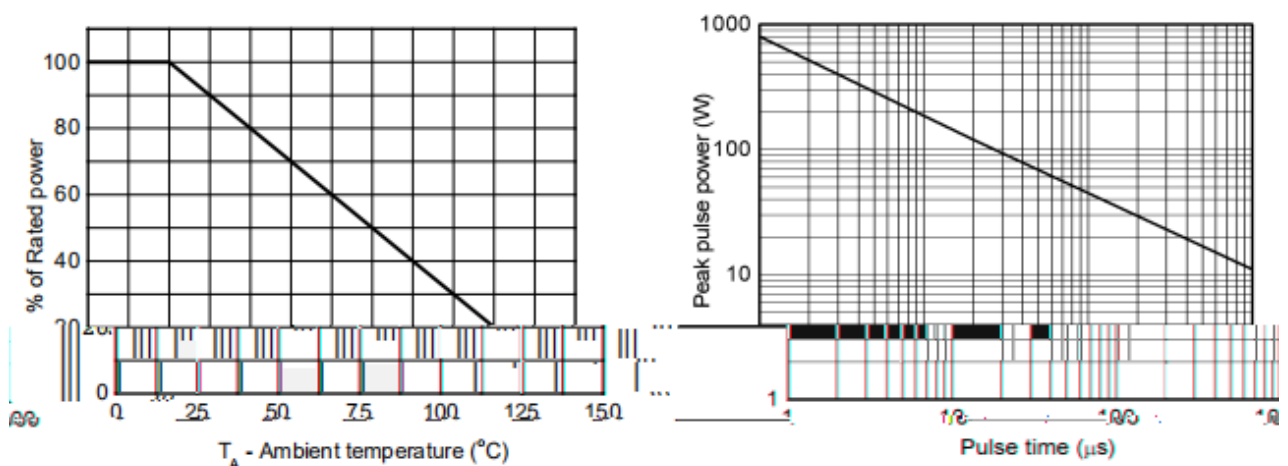


/ Electrical Characteristic Curve(Ta=25)

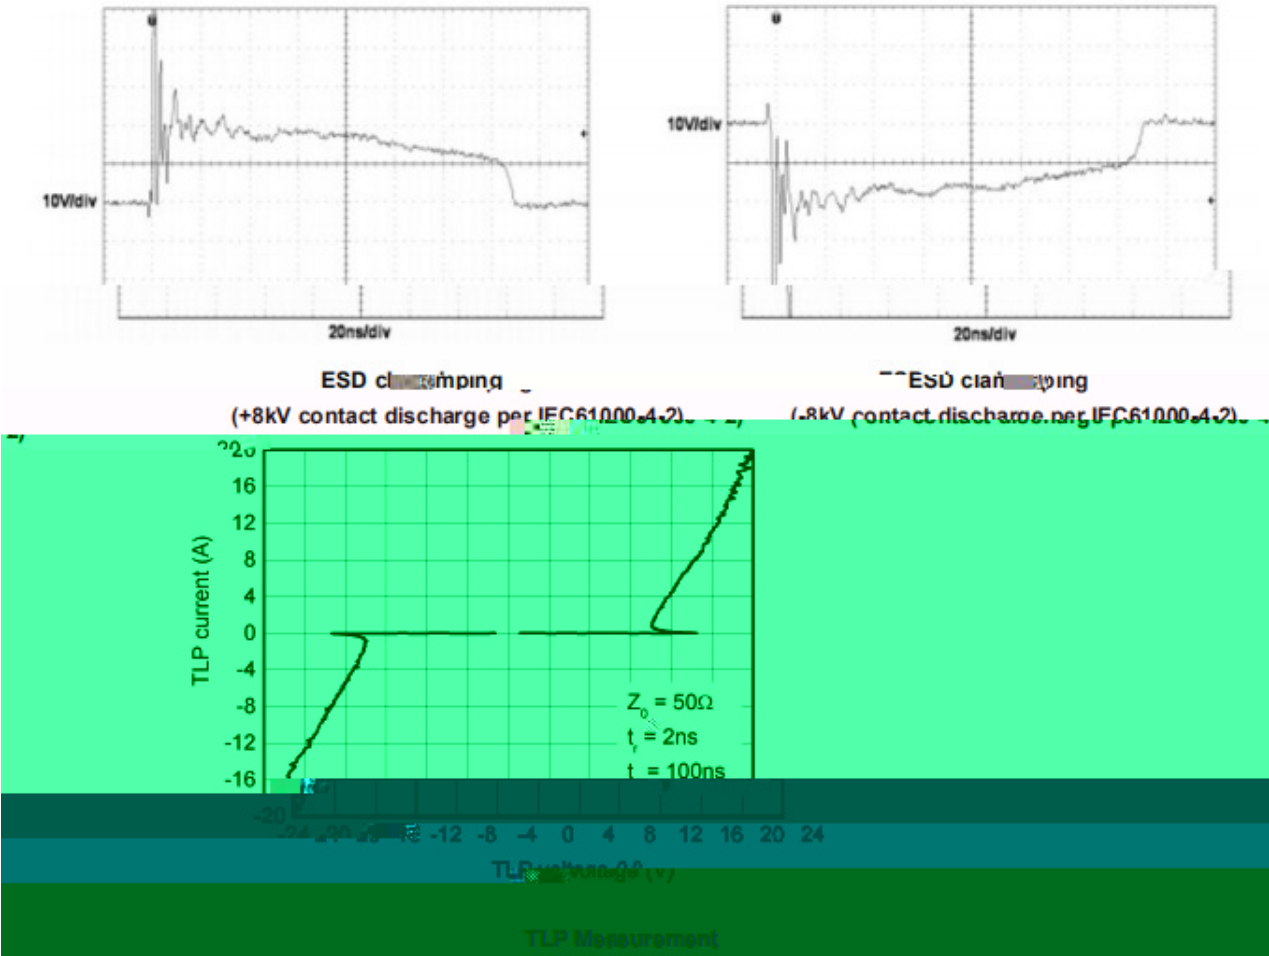

/ Package Dimensions

DFN0603

Unit:mm

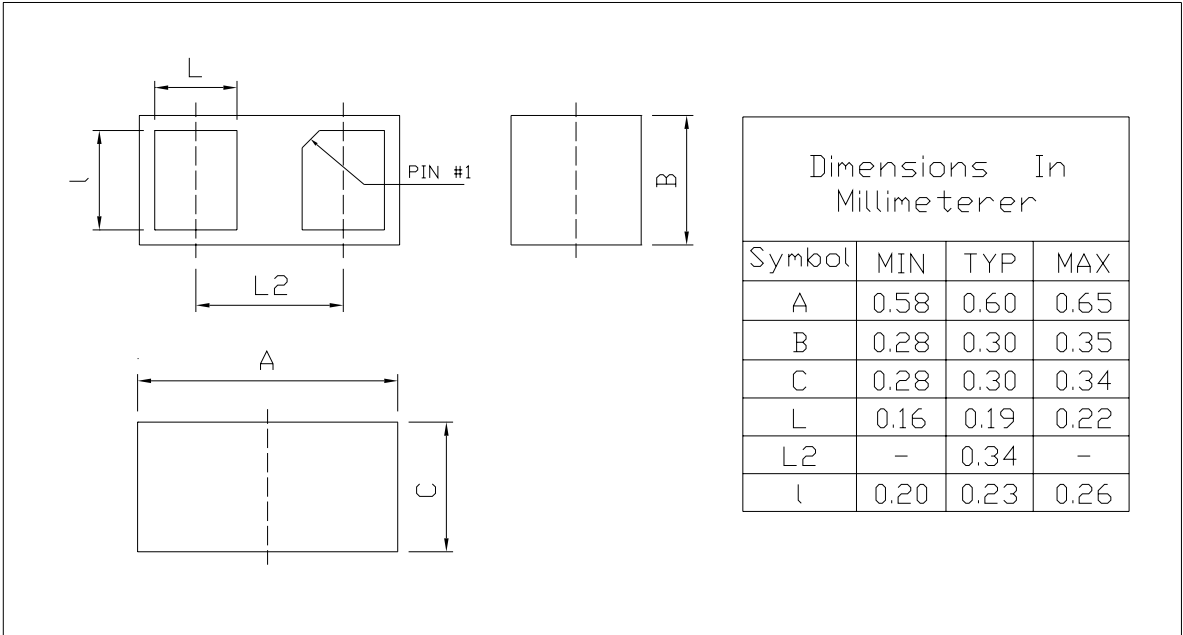

Rev.02 202102

/ Marking Instructions



Dc

$\pm$ $\pm$ $\pm$ $\pm$

+

 $\pm$

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
DFN0603	10,000	10	100,000	6	600,000	7 ×8	180×120×180	390×385×205

8 8