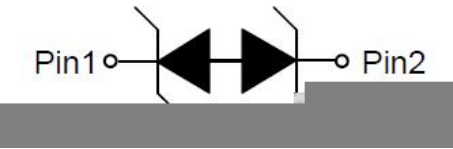



A	2020.09.15	ALL	LX LS3206V5-1N		
A	2021.09.15		DFN1006A-2L		

/ Descriptions	
DFN1006-2L	ESD

/ Features	
◆	
◆	
◆	
◆	
◆	
◆	
◆	

/ Applications	
◆	
◆	
◆	
◆	

/ Equivalent Circuit	
	


/ Pinning	
	

/ Marking	
-----------	--

/ Absolute Maximum Ratings

参数	符号	数值	单位
		±	
		±	
			℃
			℃
			℃
			℃

/ Electrical Characteristics(Ta=25)

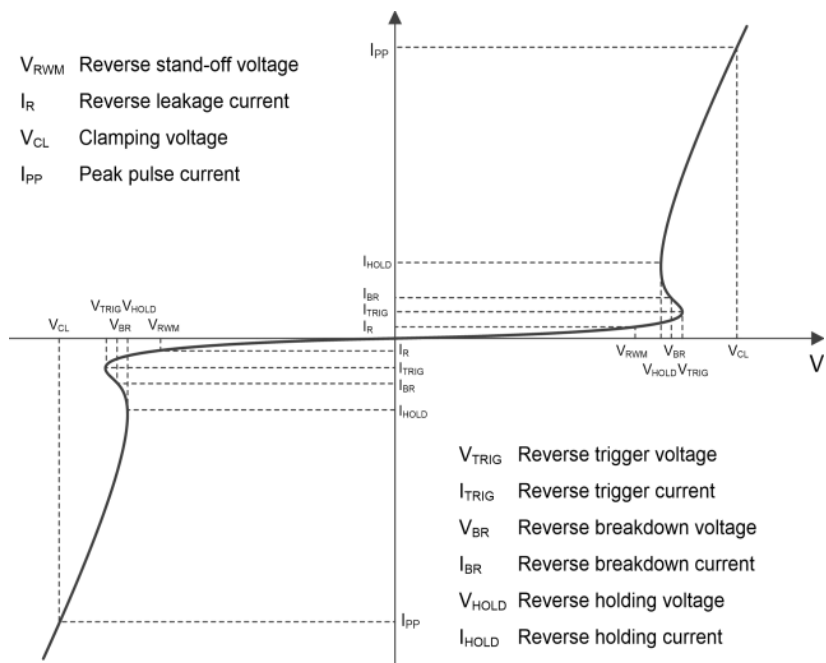

Definitions of electrical characteristics


					±	

- Notes:
- 1) TLP parameter: $Z_0 = 50\Omega$, $t_p = 100ns$, $t_r = 2ns$, averaging window from 60ns to 80ns. RDYN is calculated from 4A to 16A.


2) Contact discharge mode, according to IEC61000-4-2.

3) Non-repetitive current pulse, according to IEC61000-4-5.

/ Electrical Characteristic Curve(Ta=25)

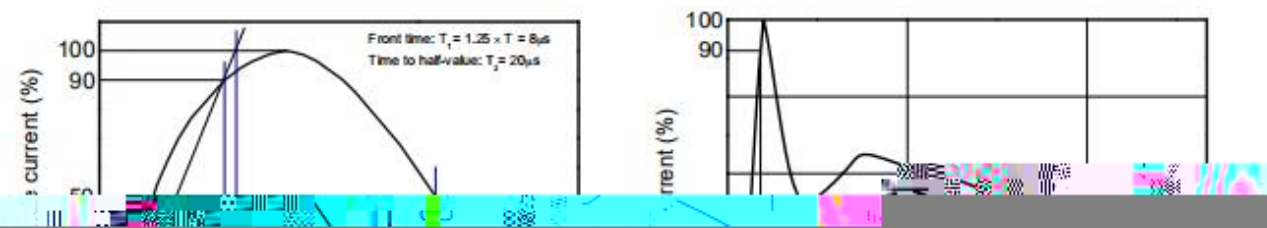

/ Electrical Characteristic Curve(Ta=25)

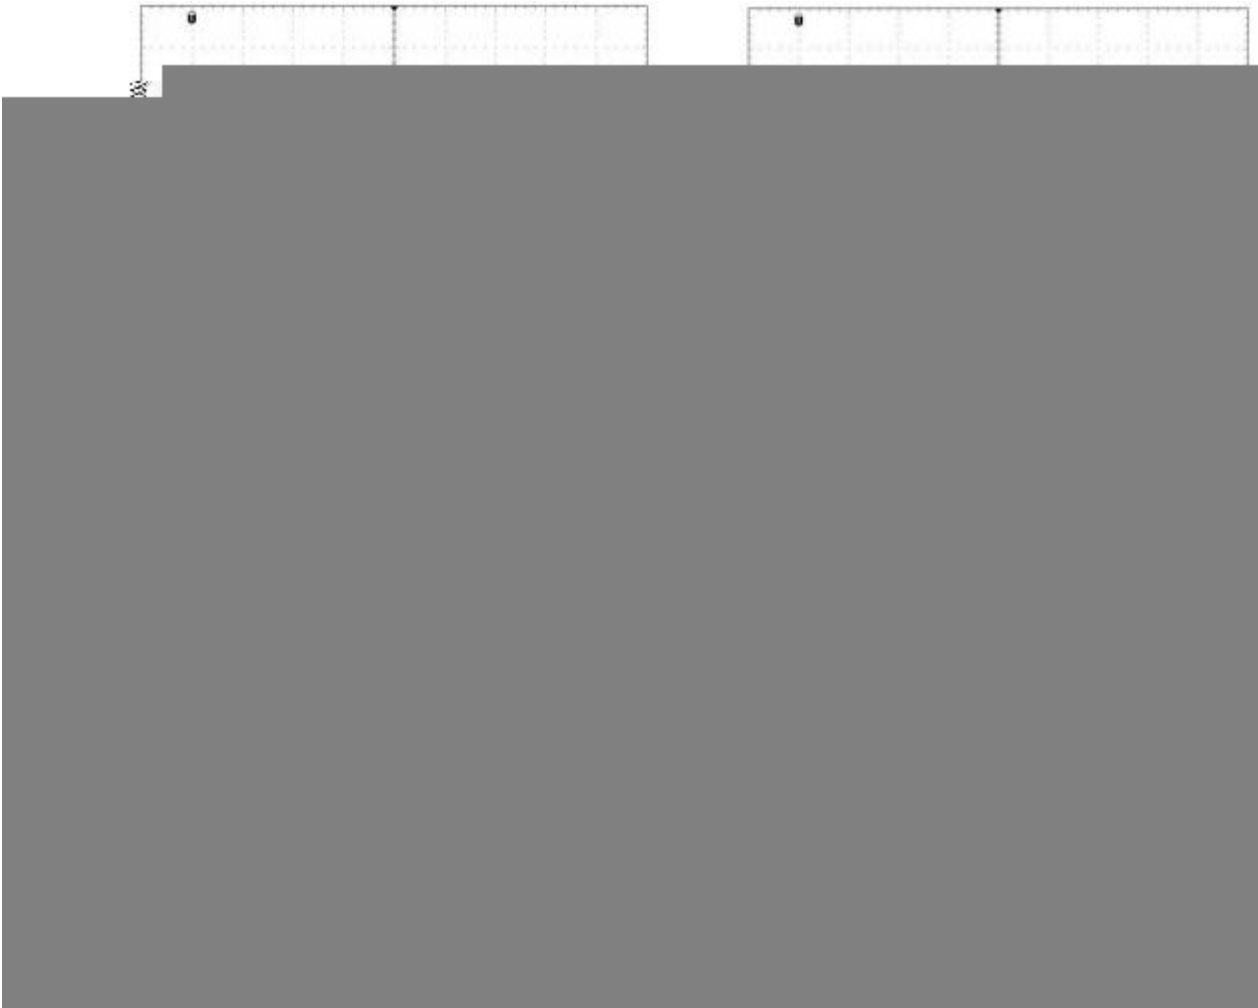

/ Package Dimensions

DFN1006-2I

Unit:mm



/ Marking Instructions




说明：

5B：为型号代码

：

：

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

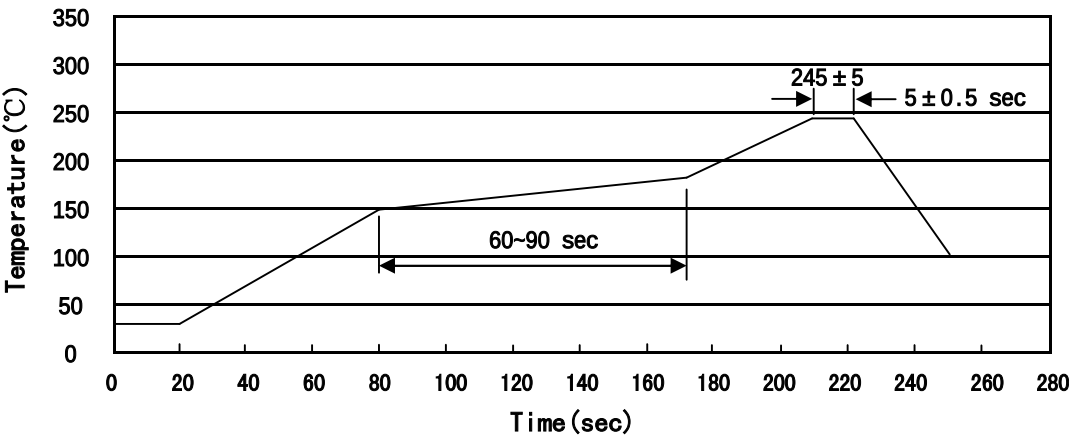

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	只/卷盘	卷盘/盒	只/盒	盒/箱	只/箱			
DFN1006-2L		10	100,000	6	600,000	7" ×8	180×120×180	390×385×205

/ Notices