


/ Descriptions

700V


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

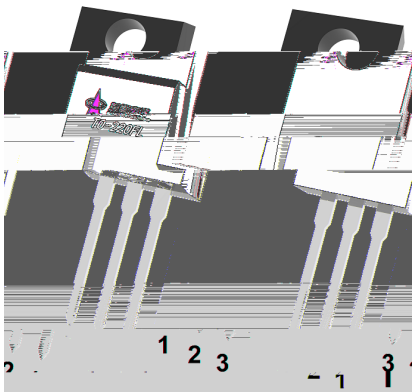

/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		

/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve










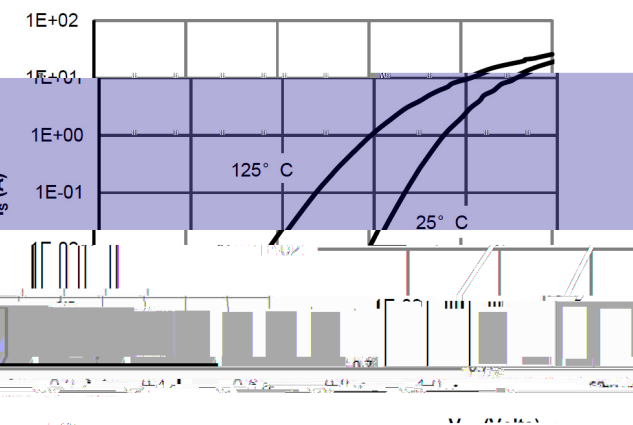


Figure 1: On-Region Characteristics; Figure 2: Transfer Characteristics; Figure 3: Normalized On-Resistance; Figure 4: Normalized On-Resistance; Figure 5: Normalized On-Resistance; Figure 6: Normalized On-Resistance


/ Electrical Characteristic Curve

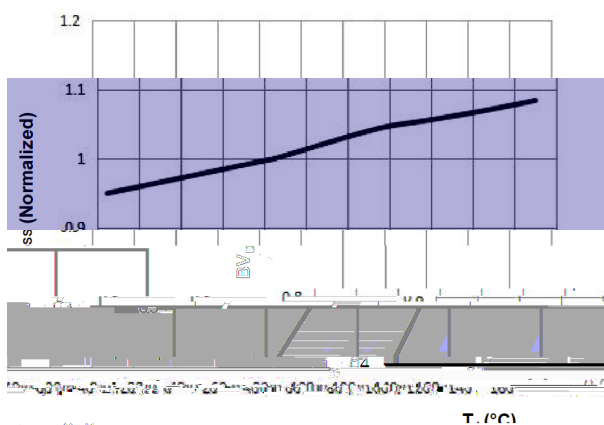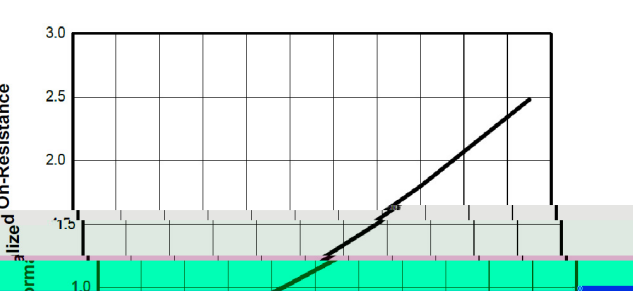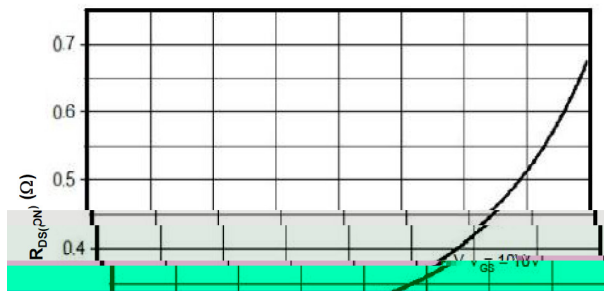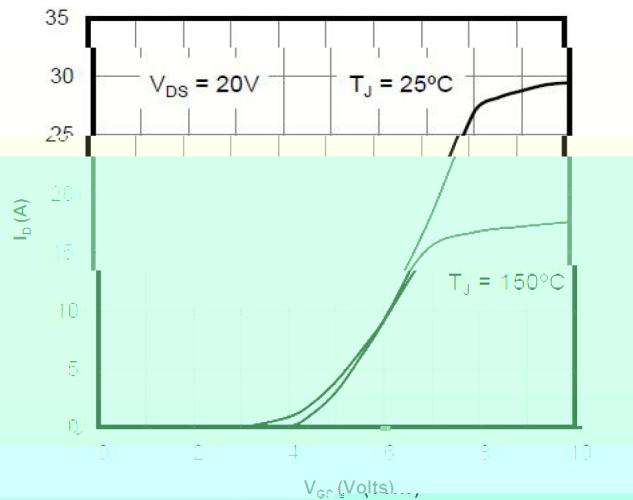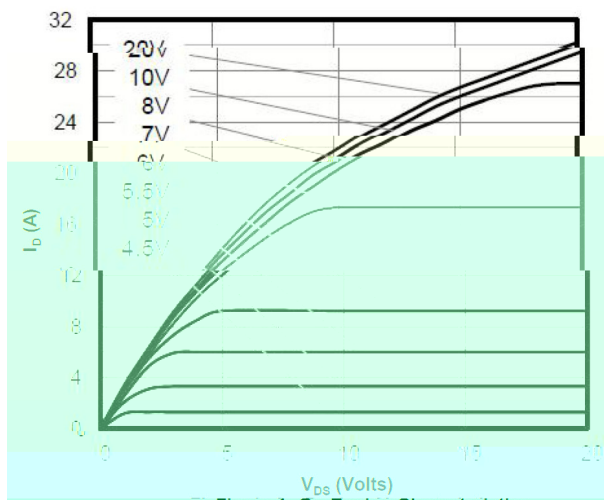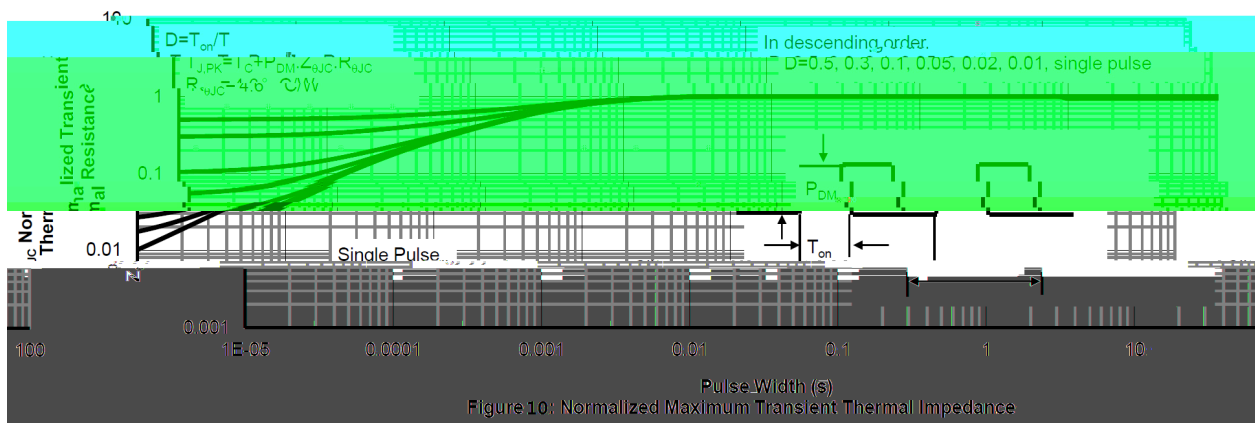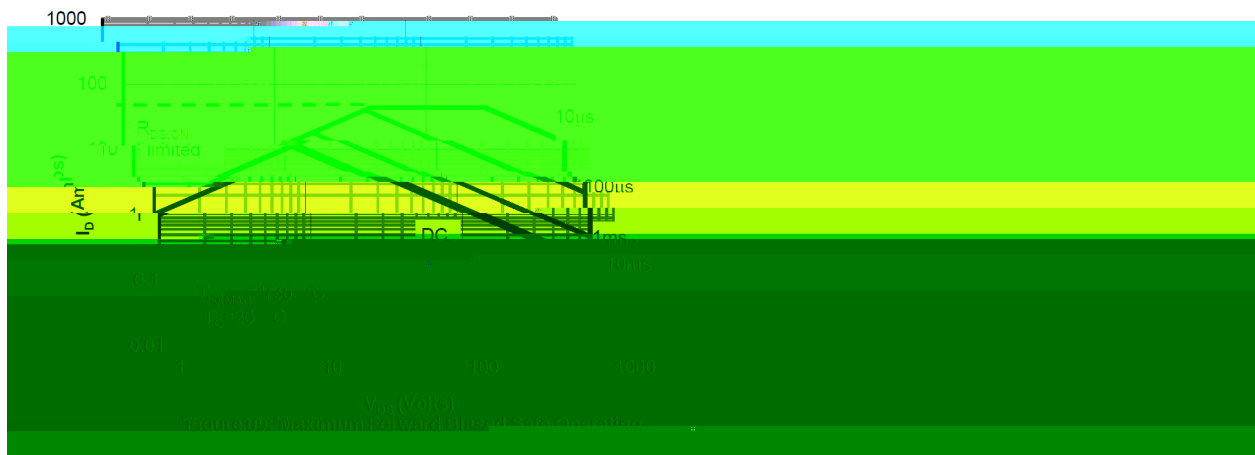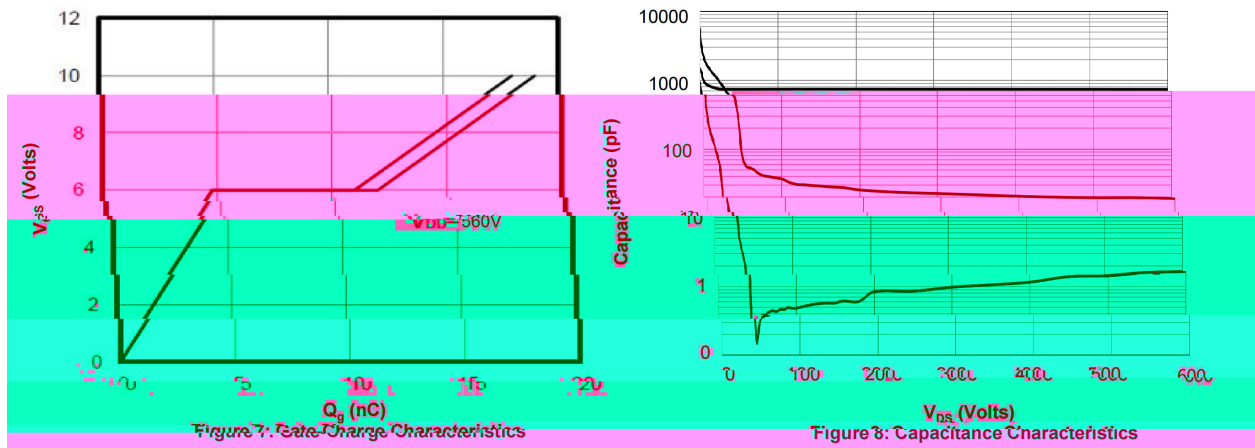


/ Package Dimensions

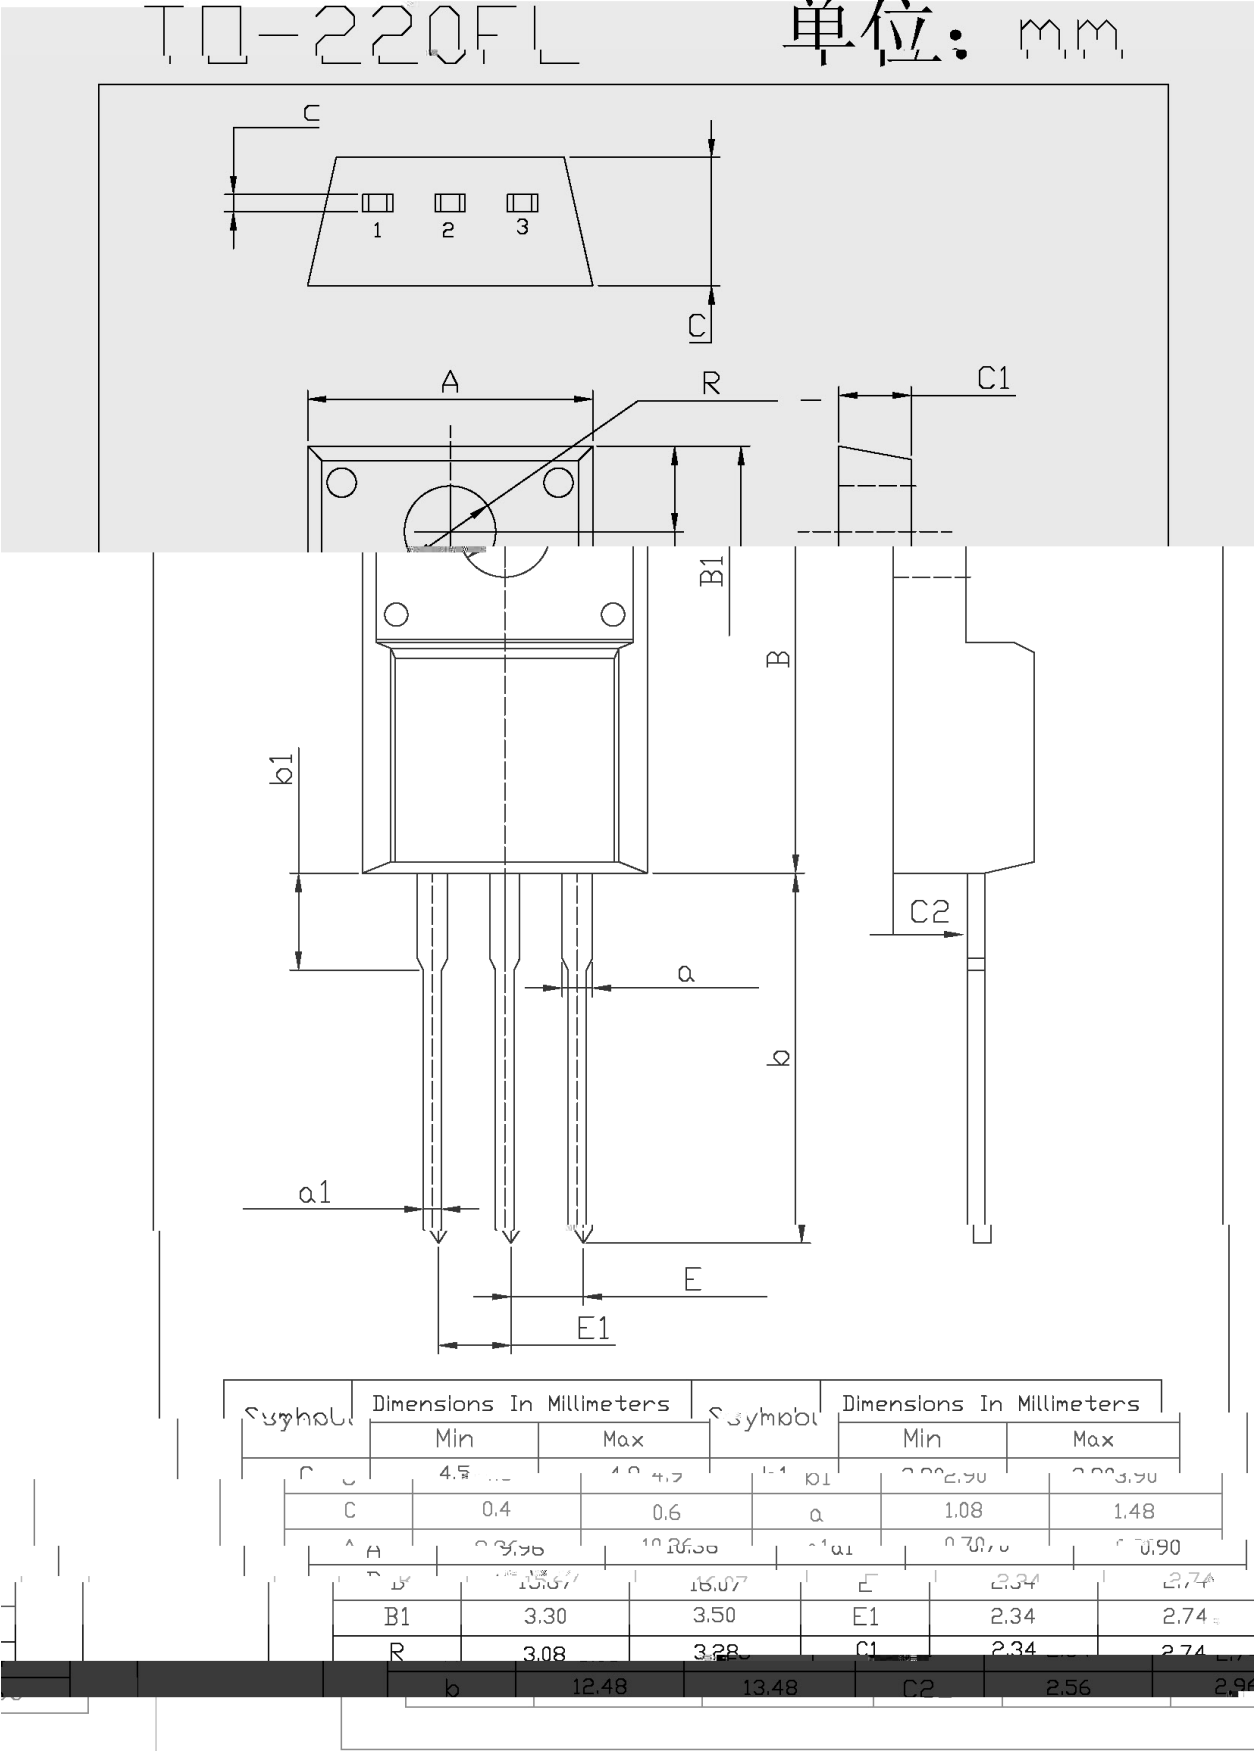

/ Marking Instructions

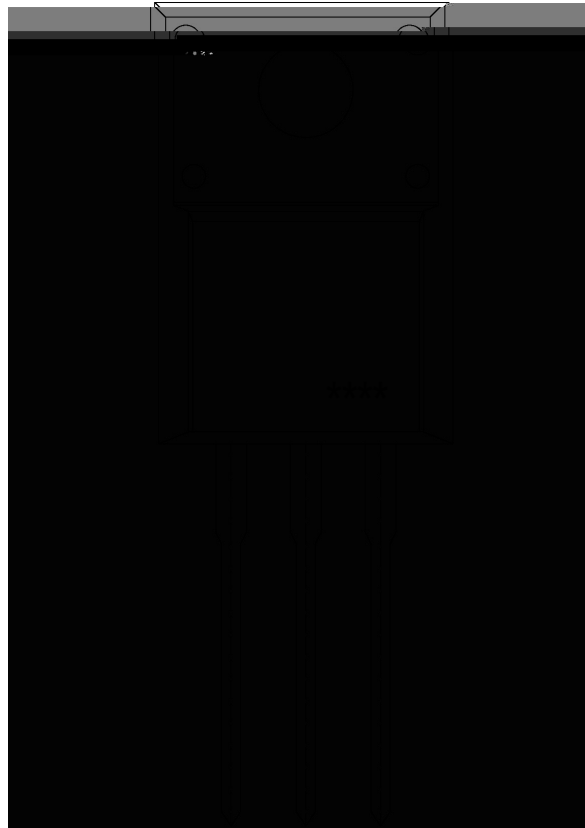

70R360C

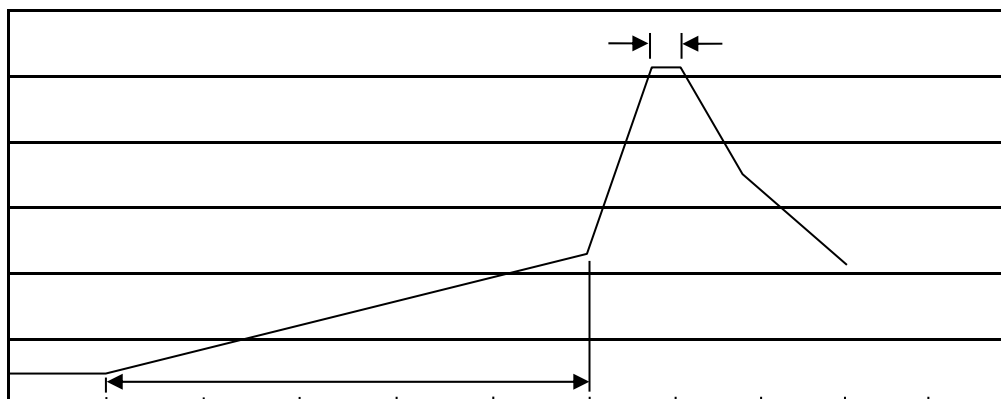 $\pm$

°C

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices