

/ Descriptions


/ Features

1. 1


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


[illegible]

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

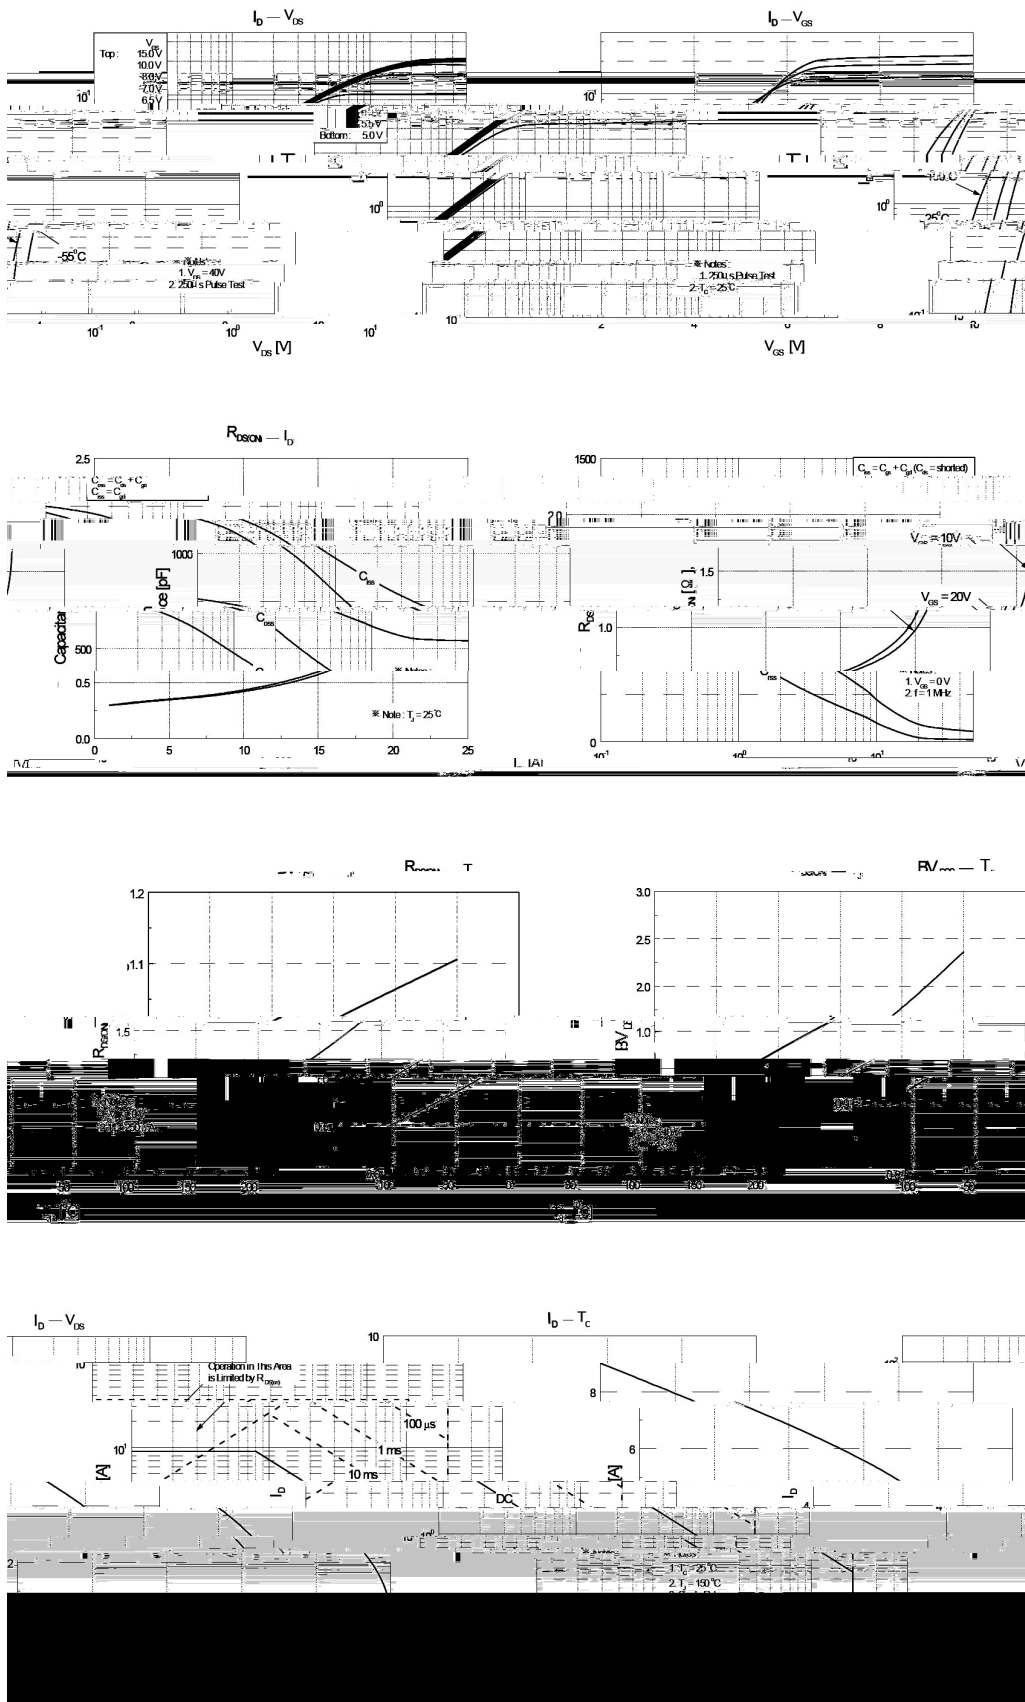

/ Package Dimensions

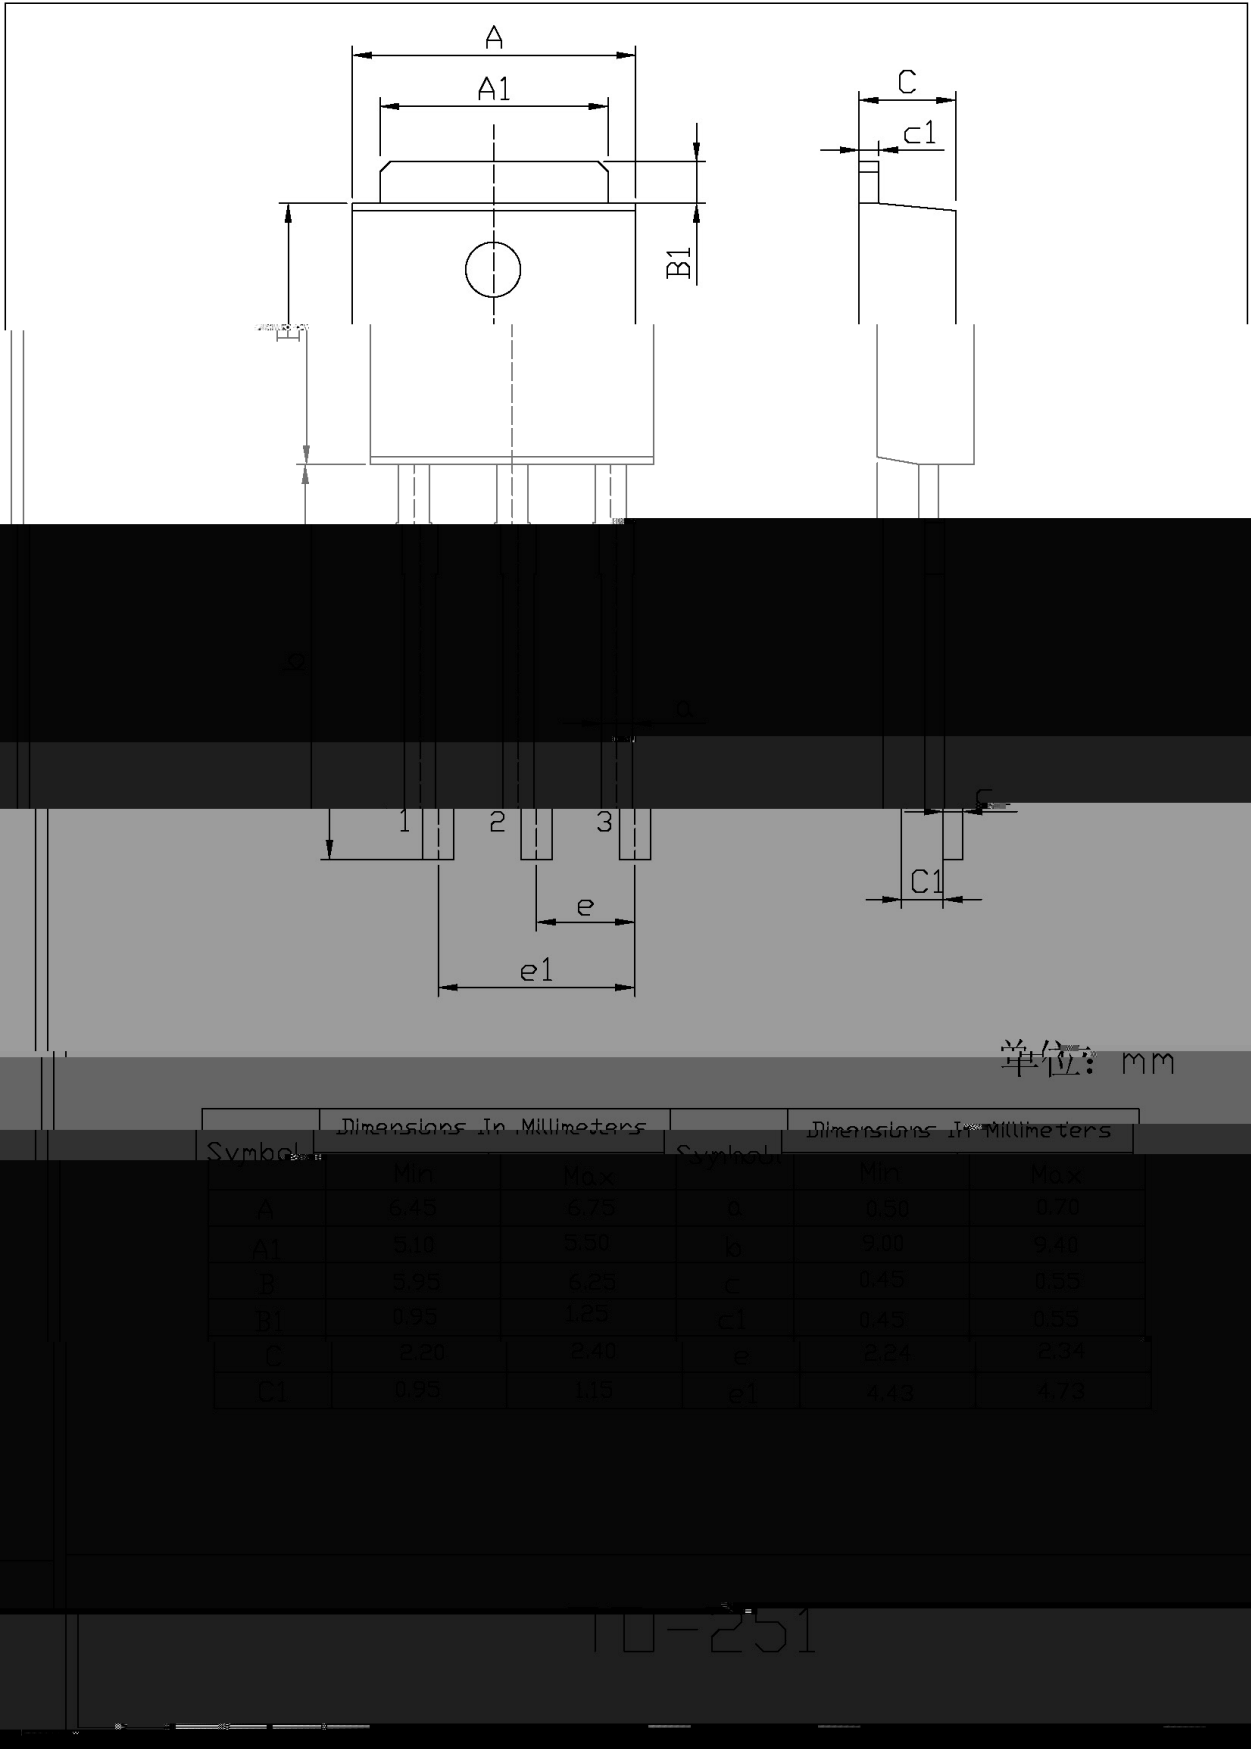

/ Marking Instructions

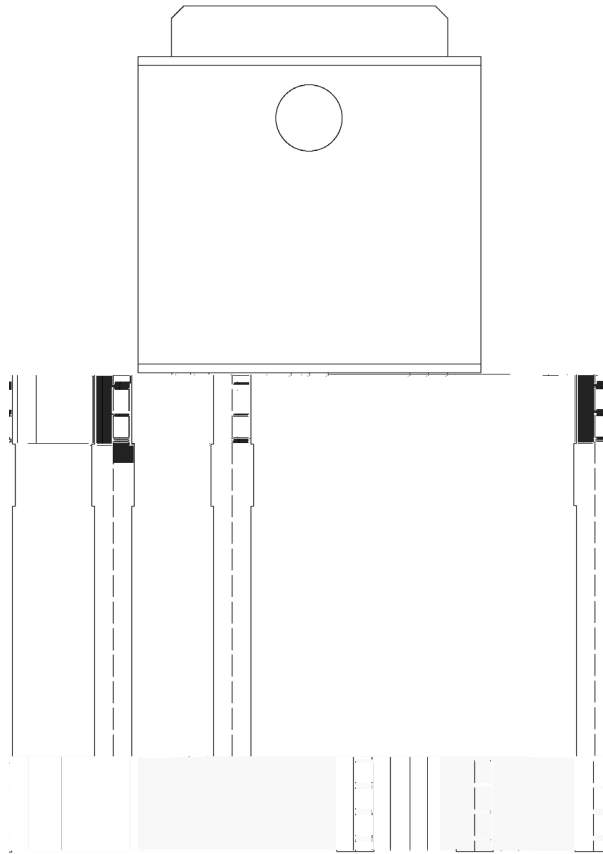

Initiator Concentration (mol/L)	Polymerization Rate (mol/L·h)
0.0001	0.00005
0.0002	0.00010
0.0003	0.00015
0.0004	0.00020
0.0005	0.00035
0.0006	0.00030
0.0007	0.00025
0.0008	0.00020
0.0009	0.00015
0.0010	0.00010

 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

°C

封装形式	包装数量					包装尺寸		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

6 6