



Ω
 Ω

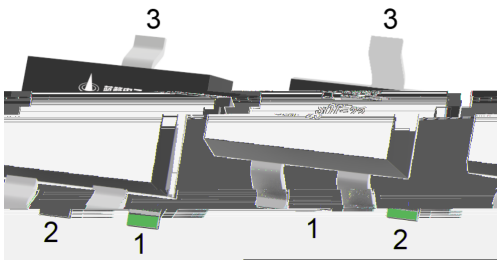

	θ		

		μ				
		μ				
		μ				
						Ω
						Ω
						μ
						μ



		Ω				

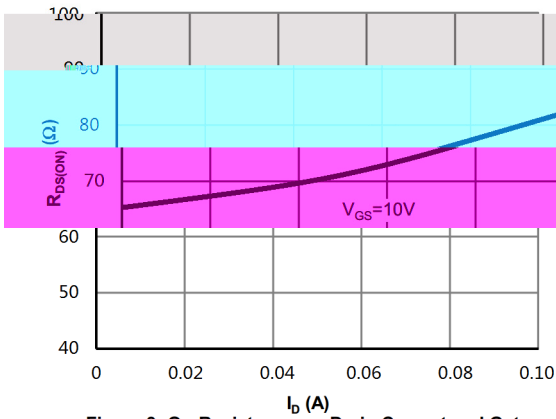
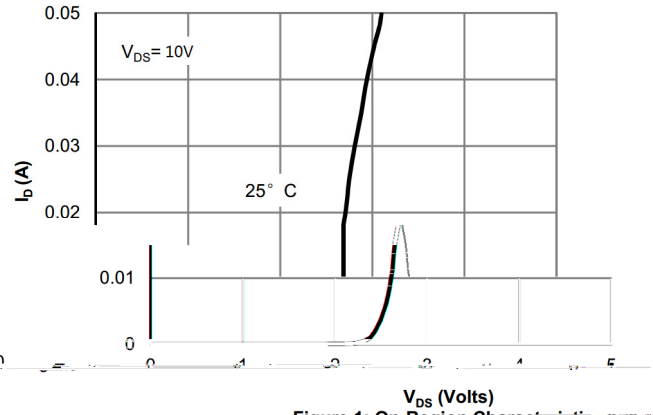
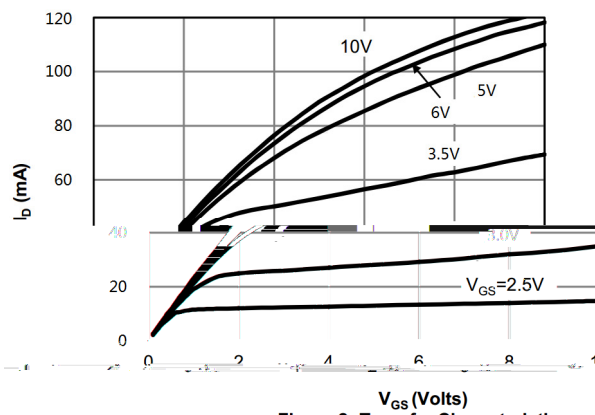


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

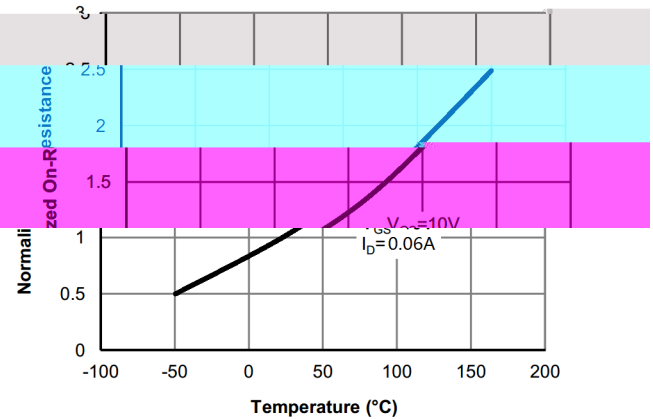
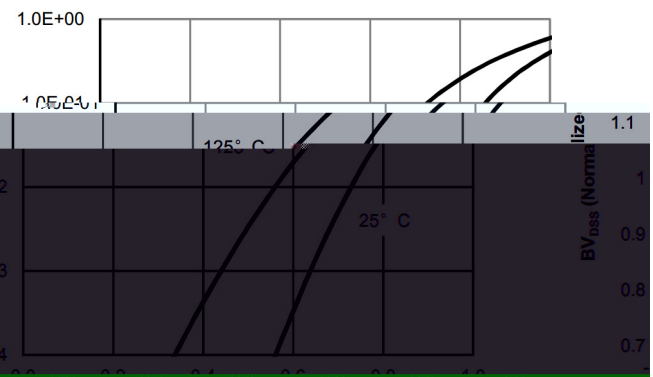
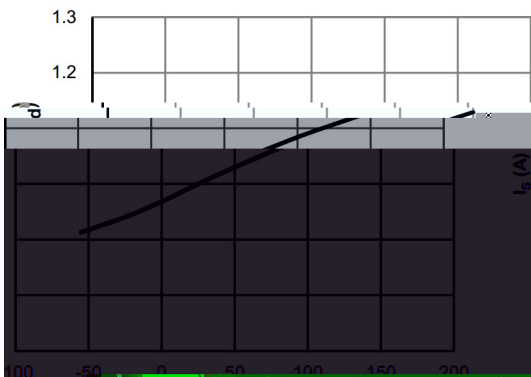


Figure 4: On-Resistance vs. Junction Temperature



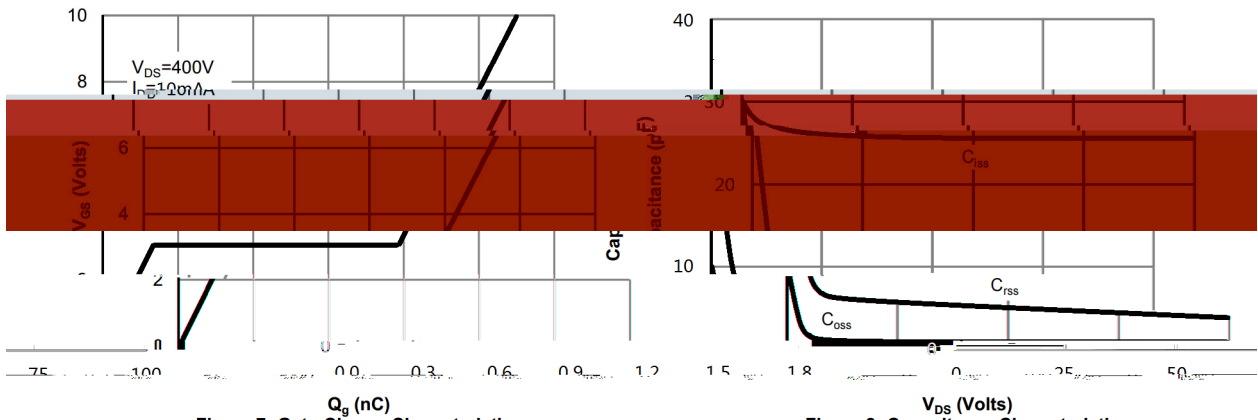


Figure 7: Gate Charge Characteristics

Figure 8: Capacitance Characteristics



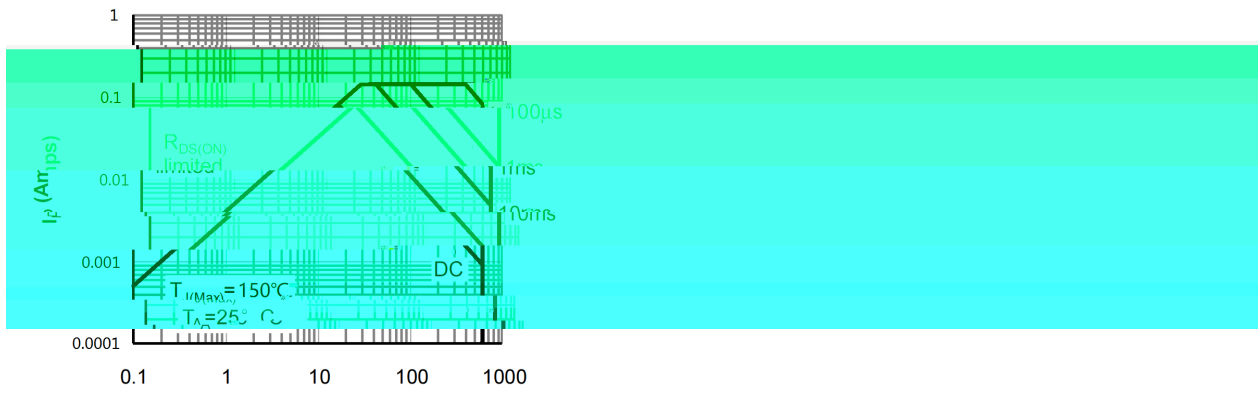



Figure 9: Maximum Forward Biased

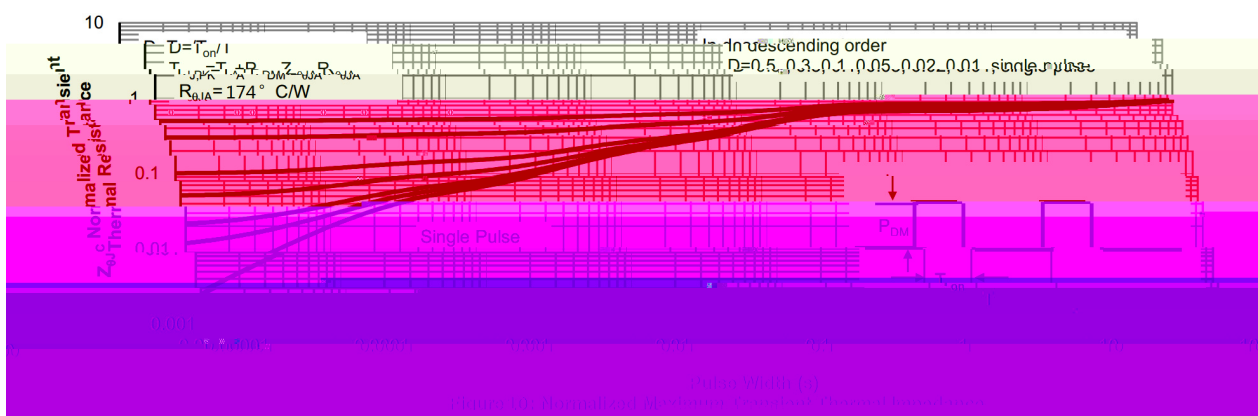

SOT-23

单位: mm

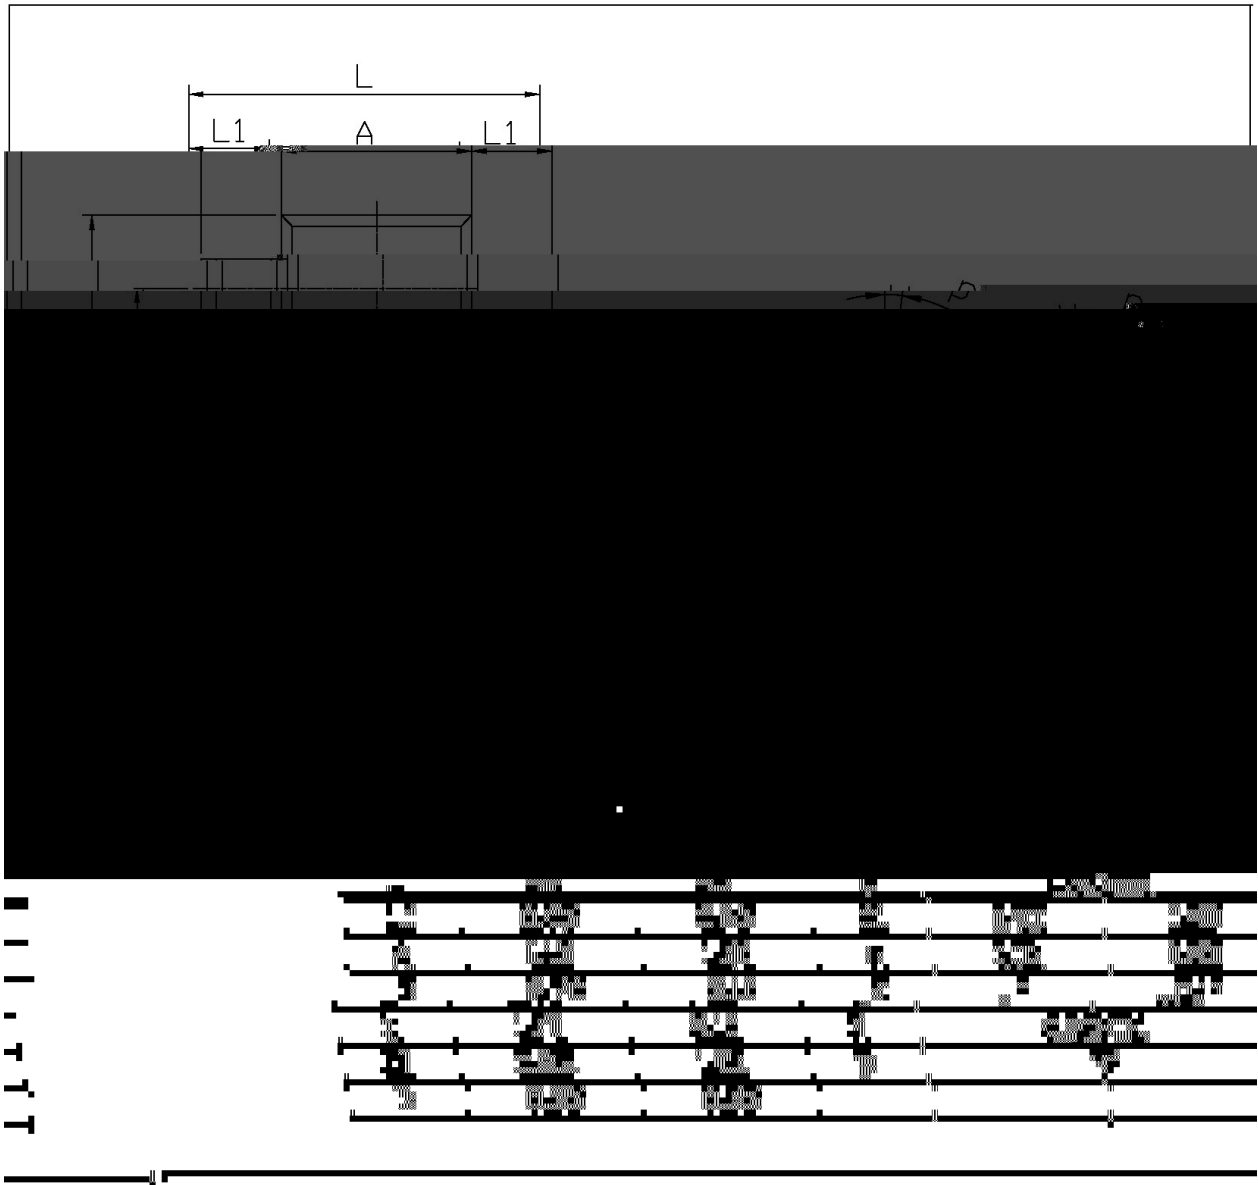

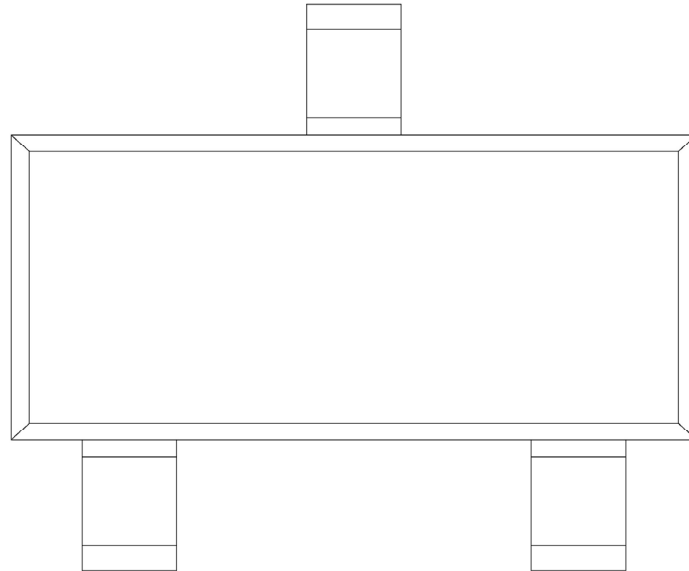

Temperature Profile for IR Reflow Soldering(Pb-Free)

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box	-
--	-----------------	----------------------	----------------------	----------------------------	----------------------	------	-----------	-----------	---