

/ Descriptions


/ Features

500mW


/ Applications

2.4V-39V

/ Equivalent Circuit




/ Pinning

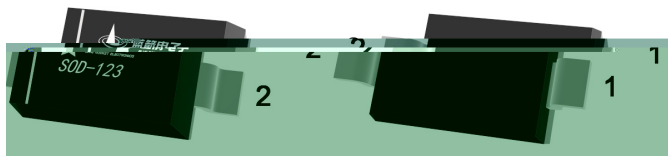


/ Marking

[illegible]

/ Electrical Characteristic Curve

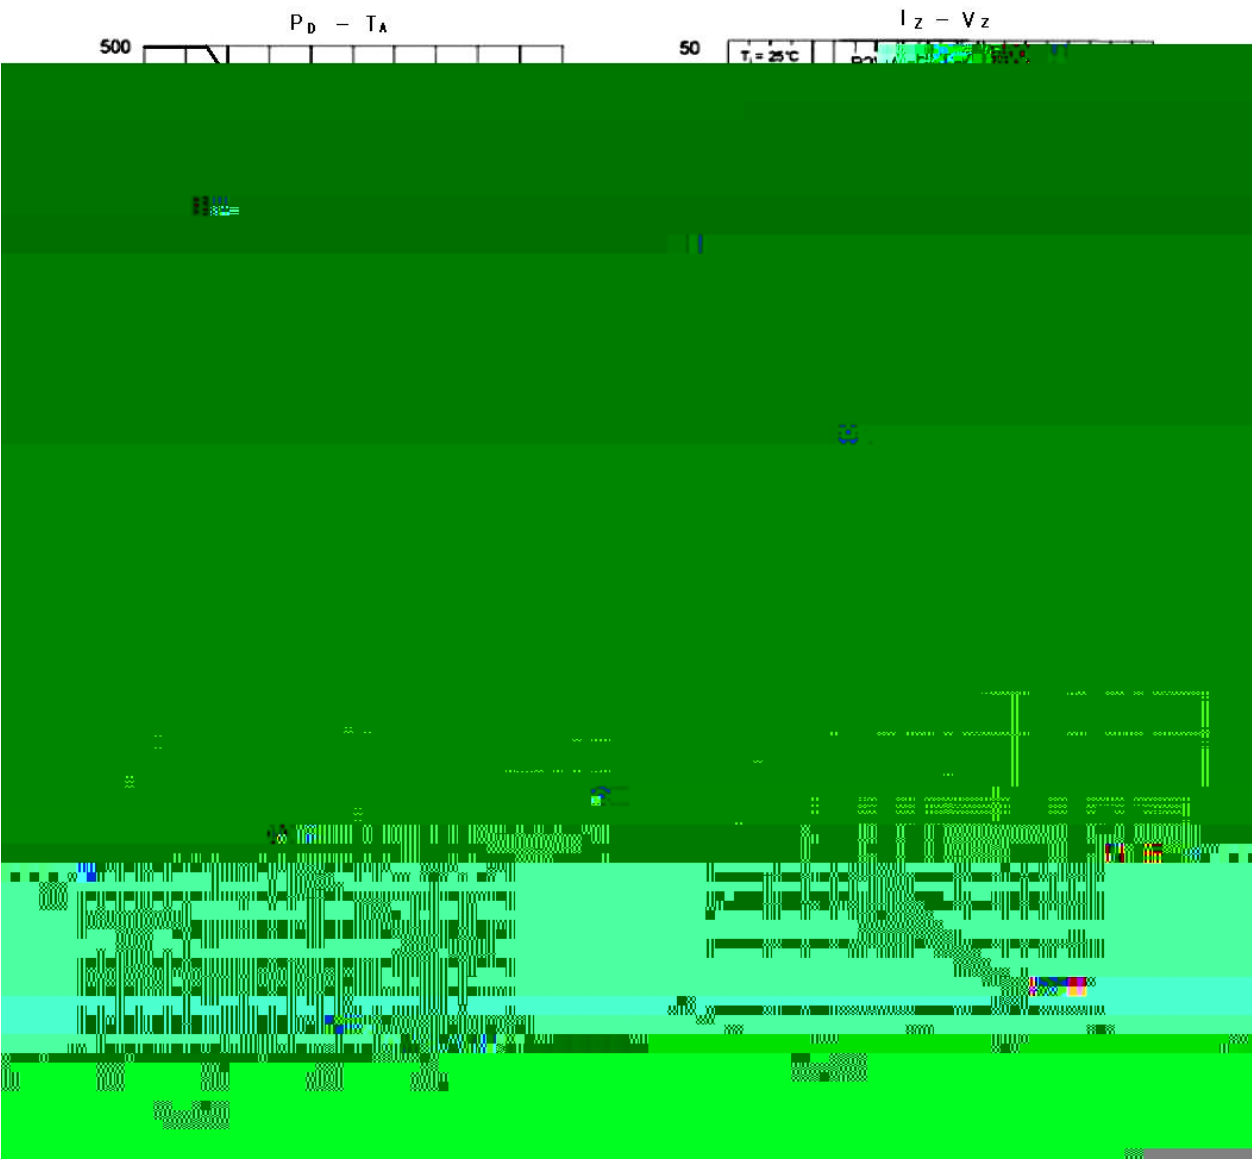

/ Package Dimensions

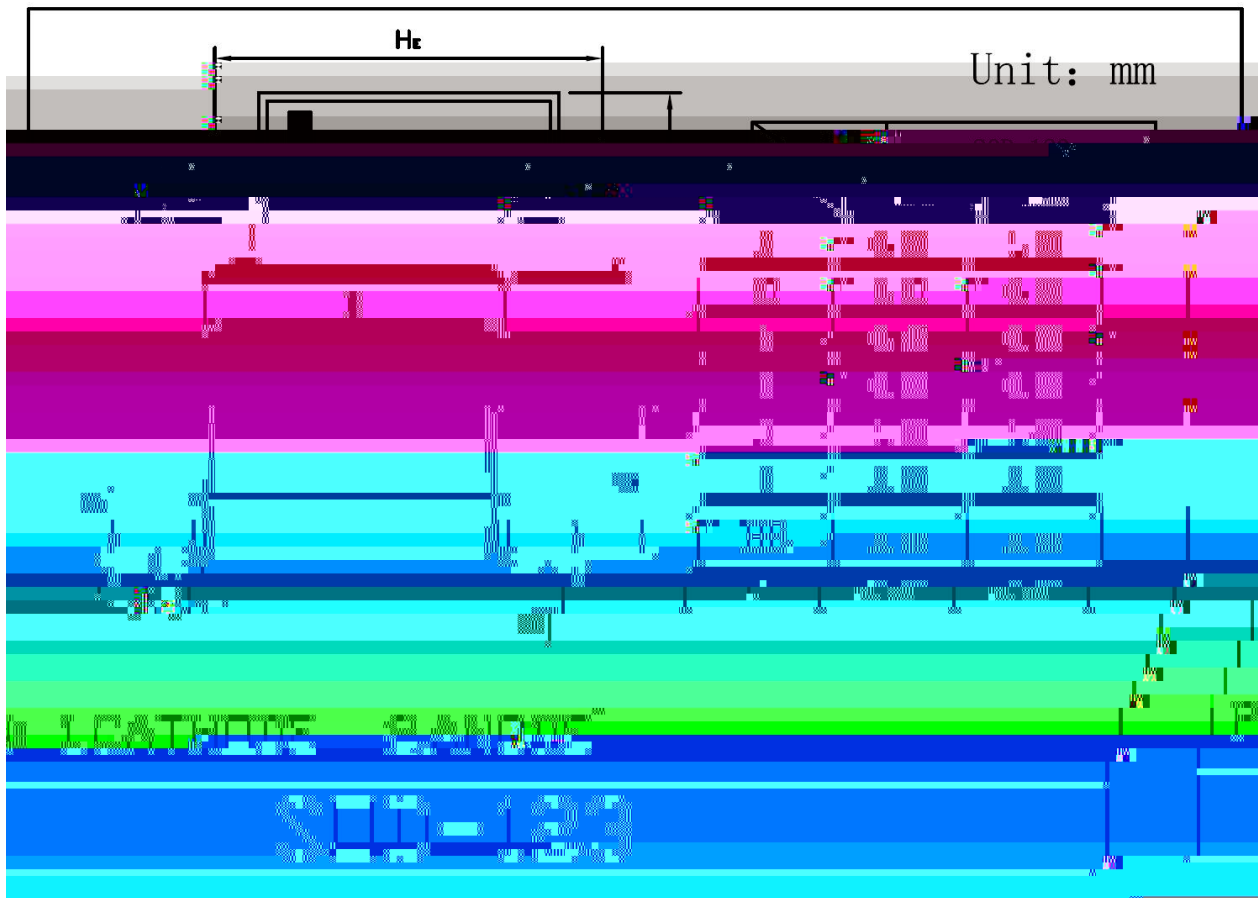


/ Marking Instructions



H
0Z

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

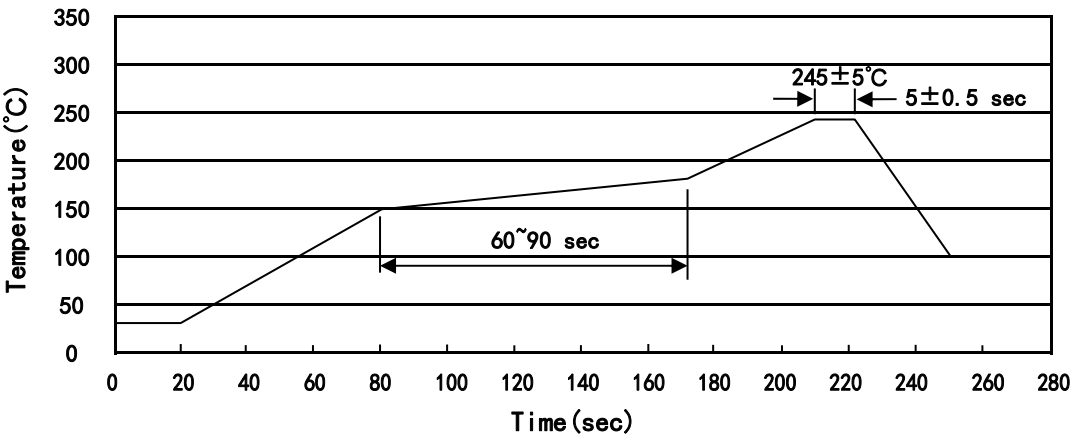

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices