



50V~600V1.0ASMAF

RoHS2011/65/EU

0




PIN	DESCRIPTION
1	Cathode
2	Anode

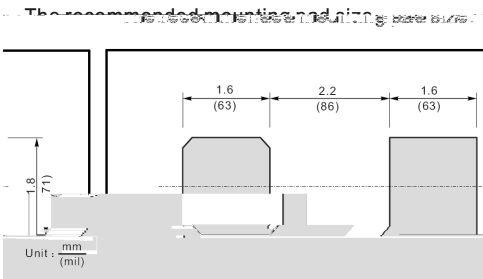



	θ								



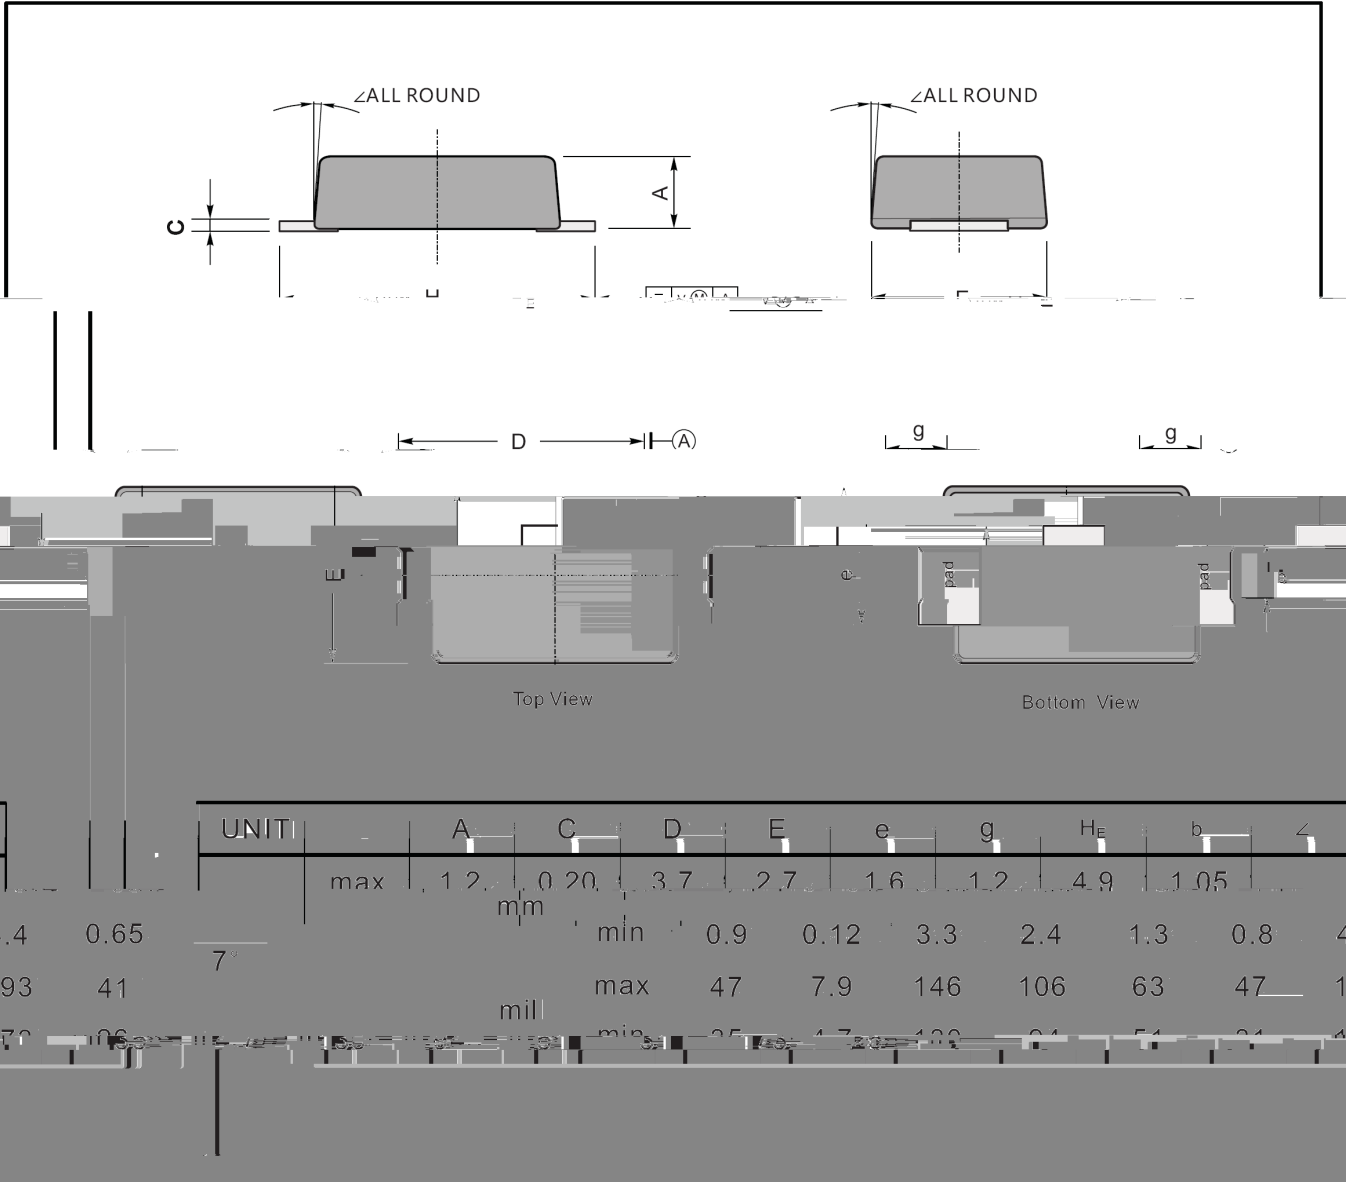

Marking

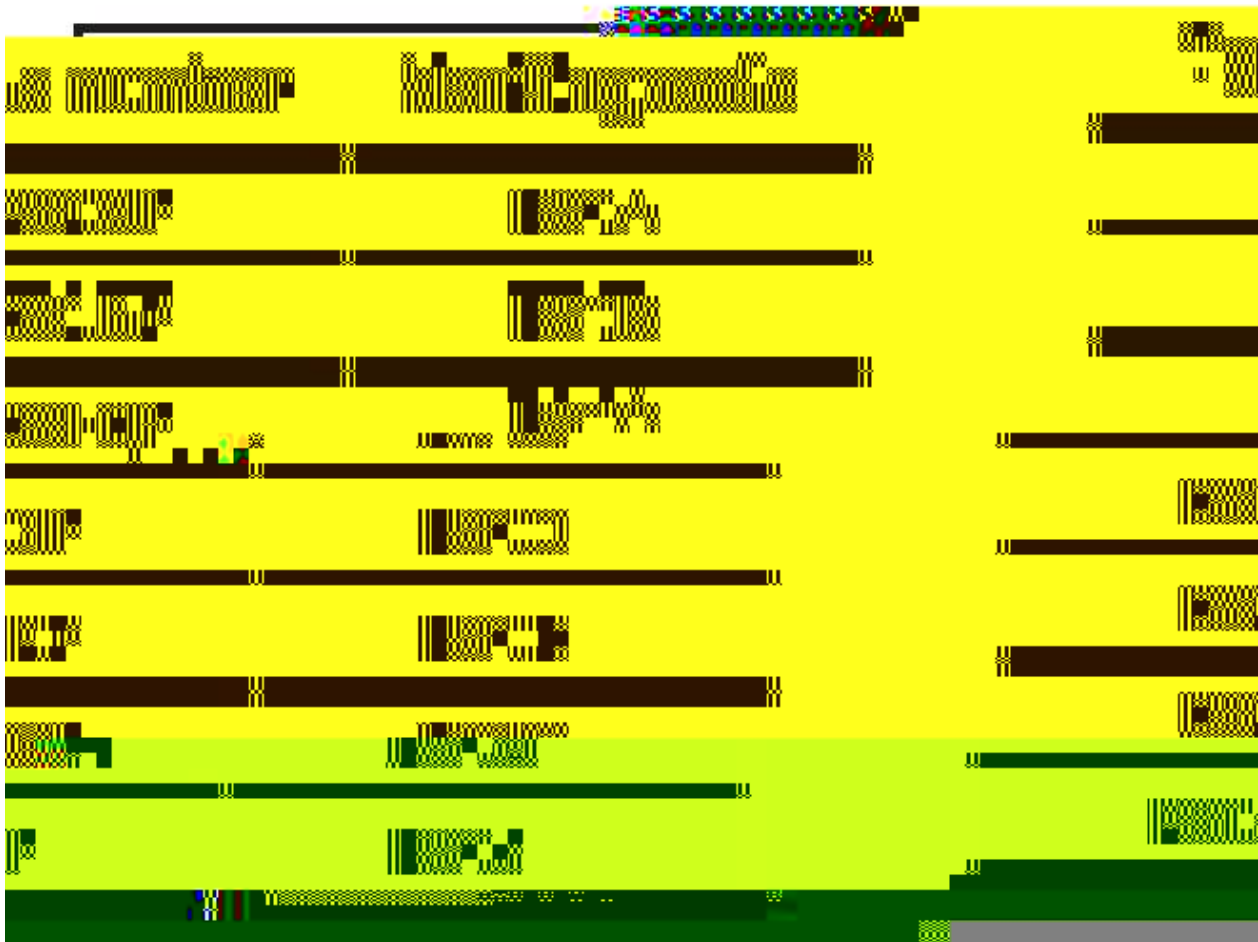

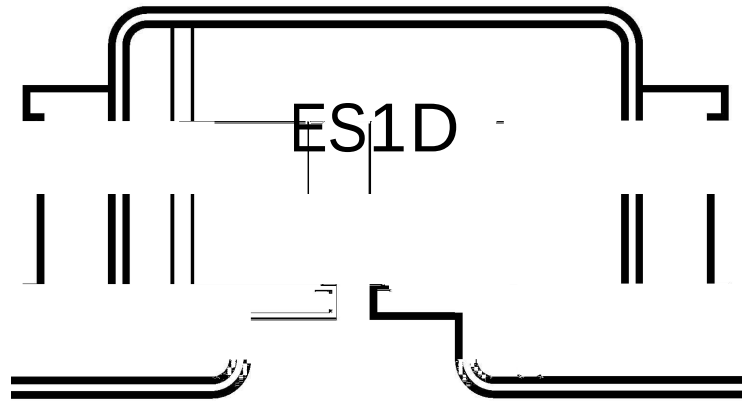


ES1D

1

3

ES1D

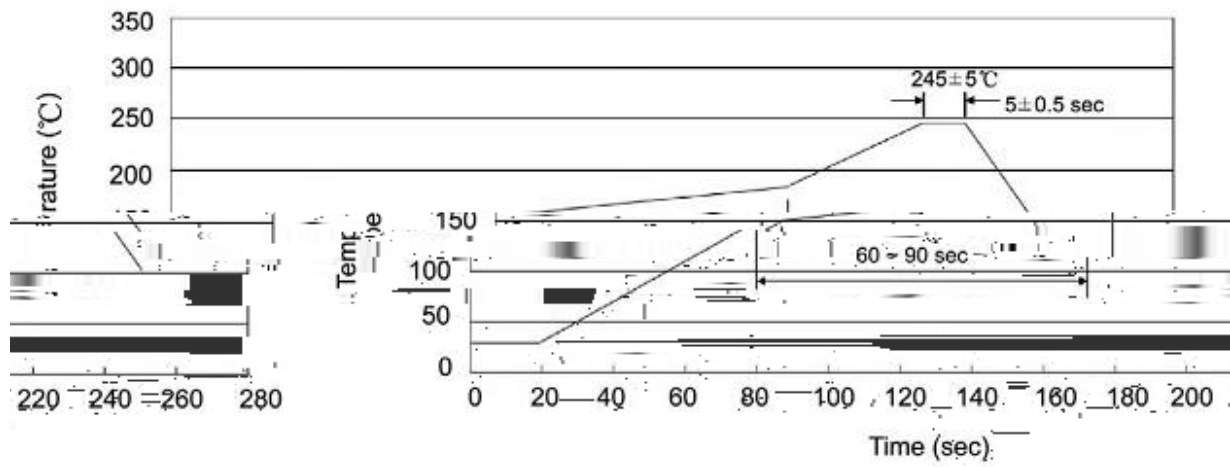

±

±

±

±