

[illegible]



/ Descriptions

50V~600V 2.0A SMA

/ Features

RoHS 2011/65/EU
,
,
0

/ Applications

.

/ Equivalent Circuit



/ Pinning

1



2

PIN	DESCRIPTION
1	Gate



/ Marking



/ Absolut

0


参数	符号	数值							单位
	()								
)	θ								℃
									℃

参数	符号	测试条件	数值						单位
		℃							
		℃							



/ Electrical Characteristic Curve

Fig.4 Static Power Dissipation vs. Ambient Temperature

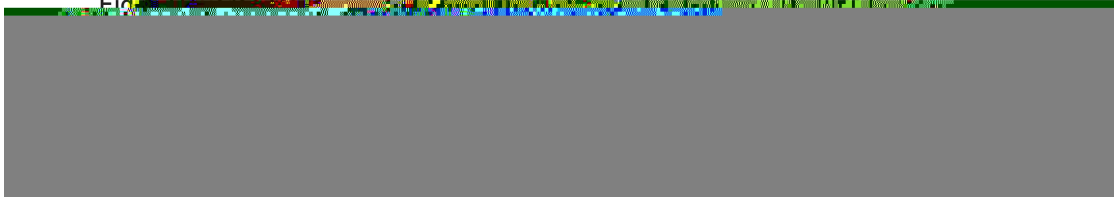

2. Rise Time =10ns, max.
Source

Get Time Base for 10ns/div



Case Temperature




Fig.6 Maximum Non-Repetitive Peak





/ Package Dimensions

SMA

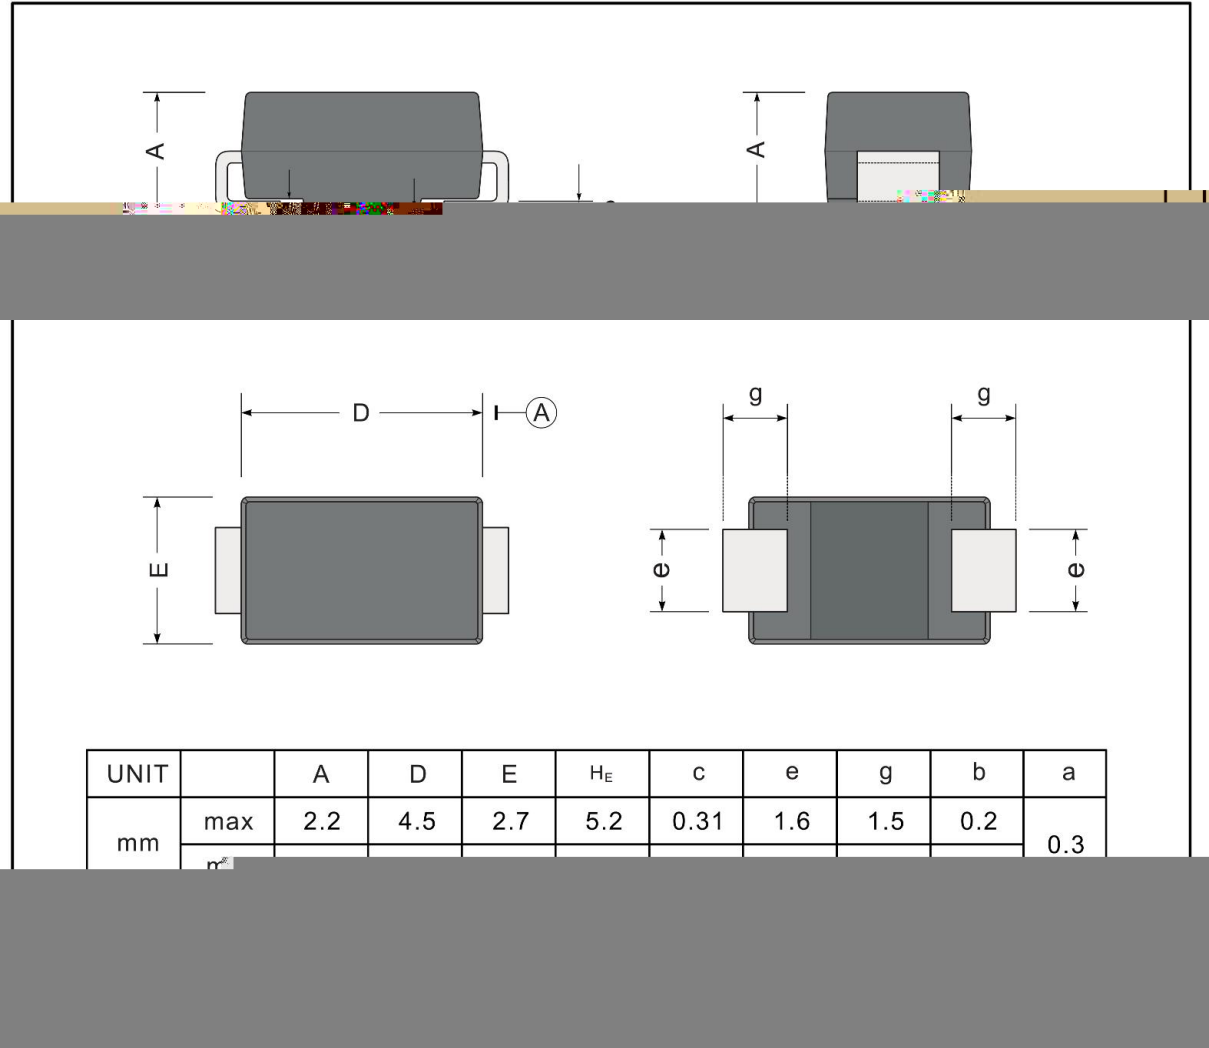



/ Marking Instructions

Marking

ES2A	ES2A
ES2B	ES2B
ES2C	ES2C
ES2D	ES2D
ES2E	ES2E
ES2G	ES2G
ES2J	ES2J

/ Marking Instructions



说明：

ES2A： 为型号代码


****： 为生产批号追溯码，第 1 个 为年月代码，后面 3 个 为当月小批号代码

ES2A：

****：



() /

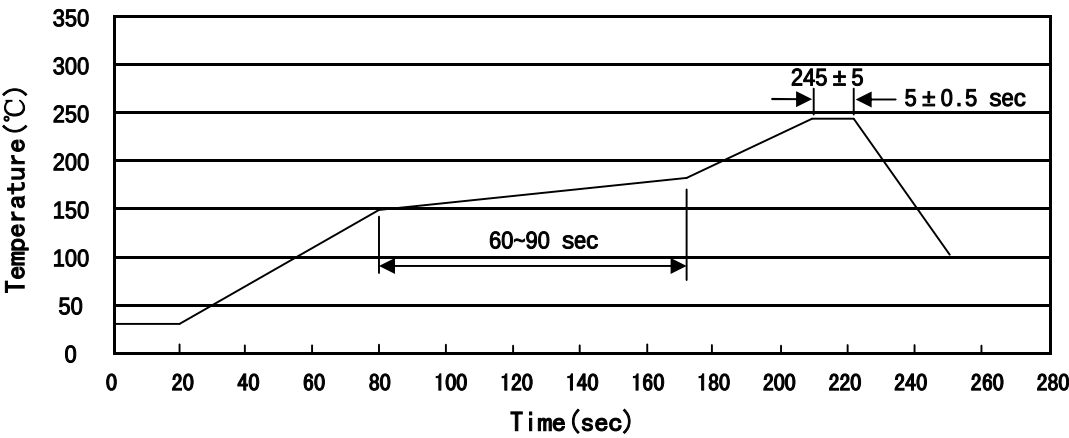

± °C ± °C ± °C ± °C

°C °C

/ Resistance to Soldering Heat Test Conditions

± °C ± °C °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		

/ Notices