

/ Descriptions

50V~1000V 1.0A SOD-123FL
Surface Mount Fast Recovery Rectifiers Reverse Voltage 50 to1000V,Forward Current 1.0A,
SOD-123FL thin package.

/ Features

RoHS 2011/65/EU
Glass Passivated Chip Junction,Fast reverse recovery time,Lead free in comply with EU R0HS
2011/65/EU directives,For surface mounted applications,HF Product.


/ Applications

General purpose.

/ Equivalent Circuit




/ Pinning

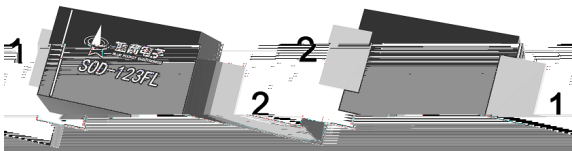

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

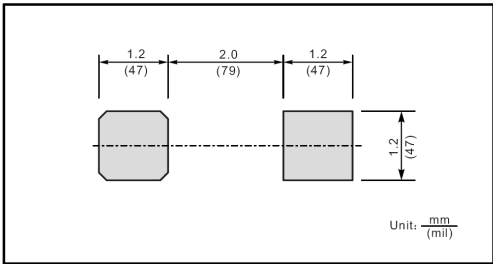

/ Marking

Type number	FR101W	FR102W	FR103W	FR104W	FR105W	FR106W	FR107W
Marking code	F2				F5	F7	


Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

/ Electrical Characteristic Curve




/ Package Dimensions

SOD-123FL

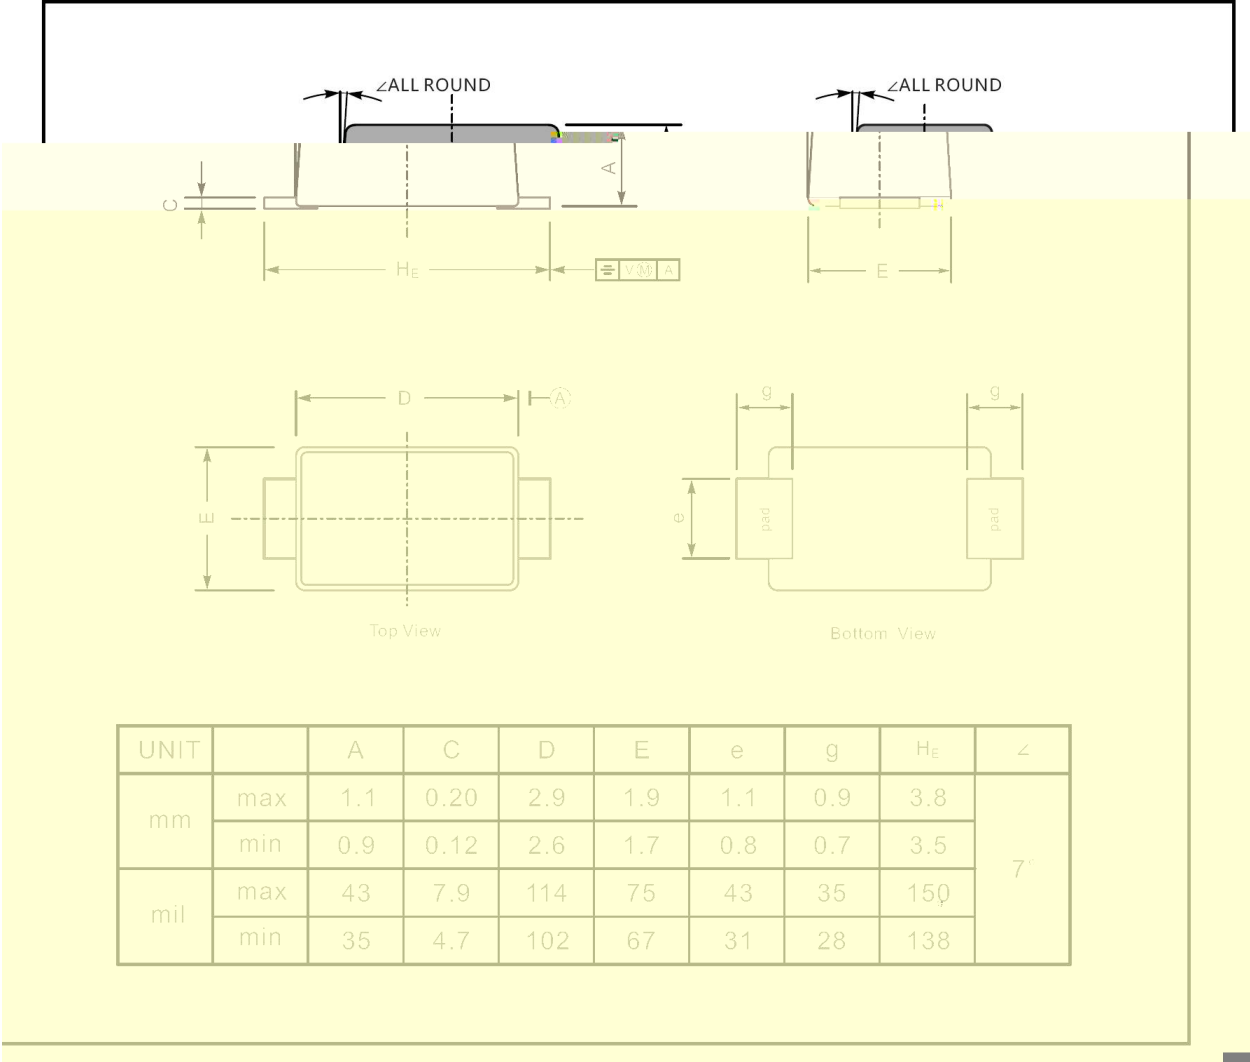

/ Marking Instructions

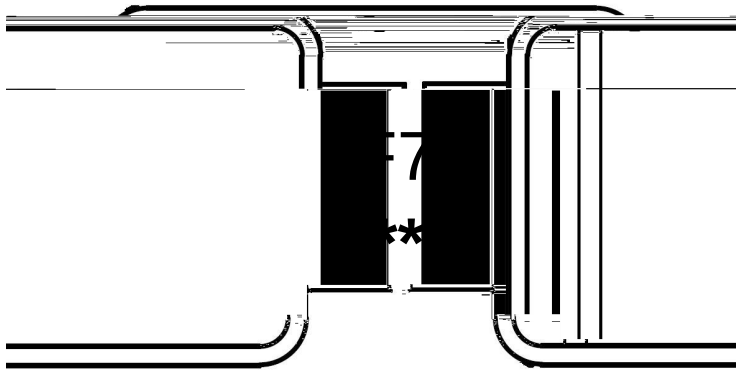

F7


Note:

F7 Product Type Code
**** Lot No. Code, code change with Lot No

Marking

Type number	Marking code
FR101W	F2
FR102W	
FR103W	
FR104W	
FR105W	F5
FR106W	F7
FR107W	

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

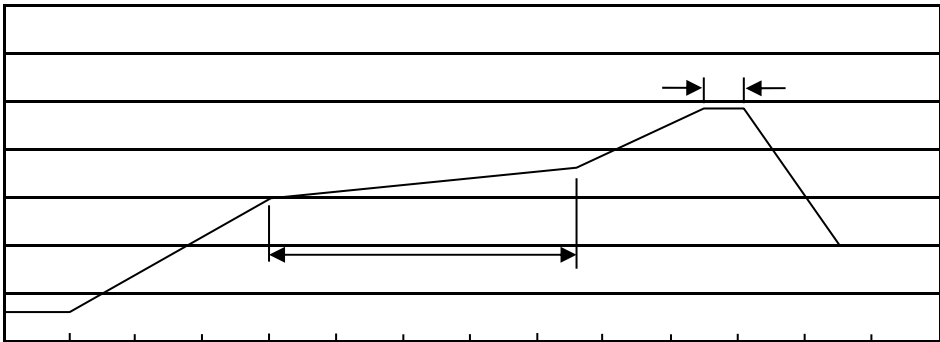

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10

/sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOD-123FL	3,000	8	24,000	6	144,000	7 ×8	185×180×105	390×385×205

/ Notices