


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

|  |   |   |
|--|---|---|
|  |   |   |
|  |   |   |
|  | * | * |

/ Absolute Maximum Ratings(Ta=25 – )

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

/ Electrical Characteristics(Ta=25 – )


|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

/ Electrical Characteristic Curve


/ Package Dimensions

SOT-89


单位: mm

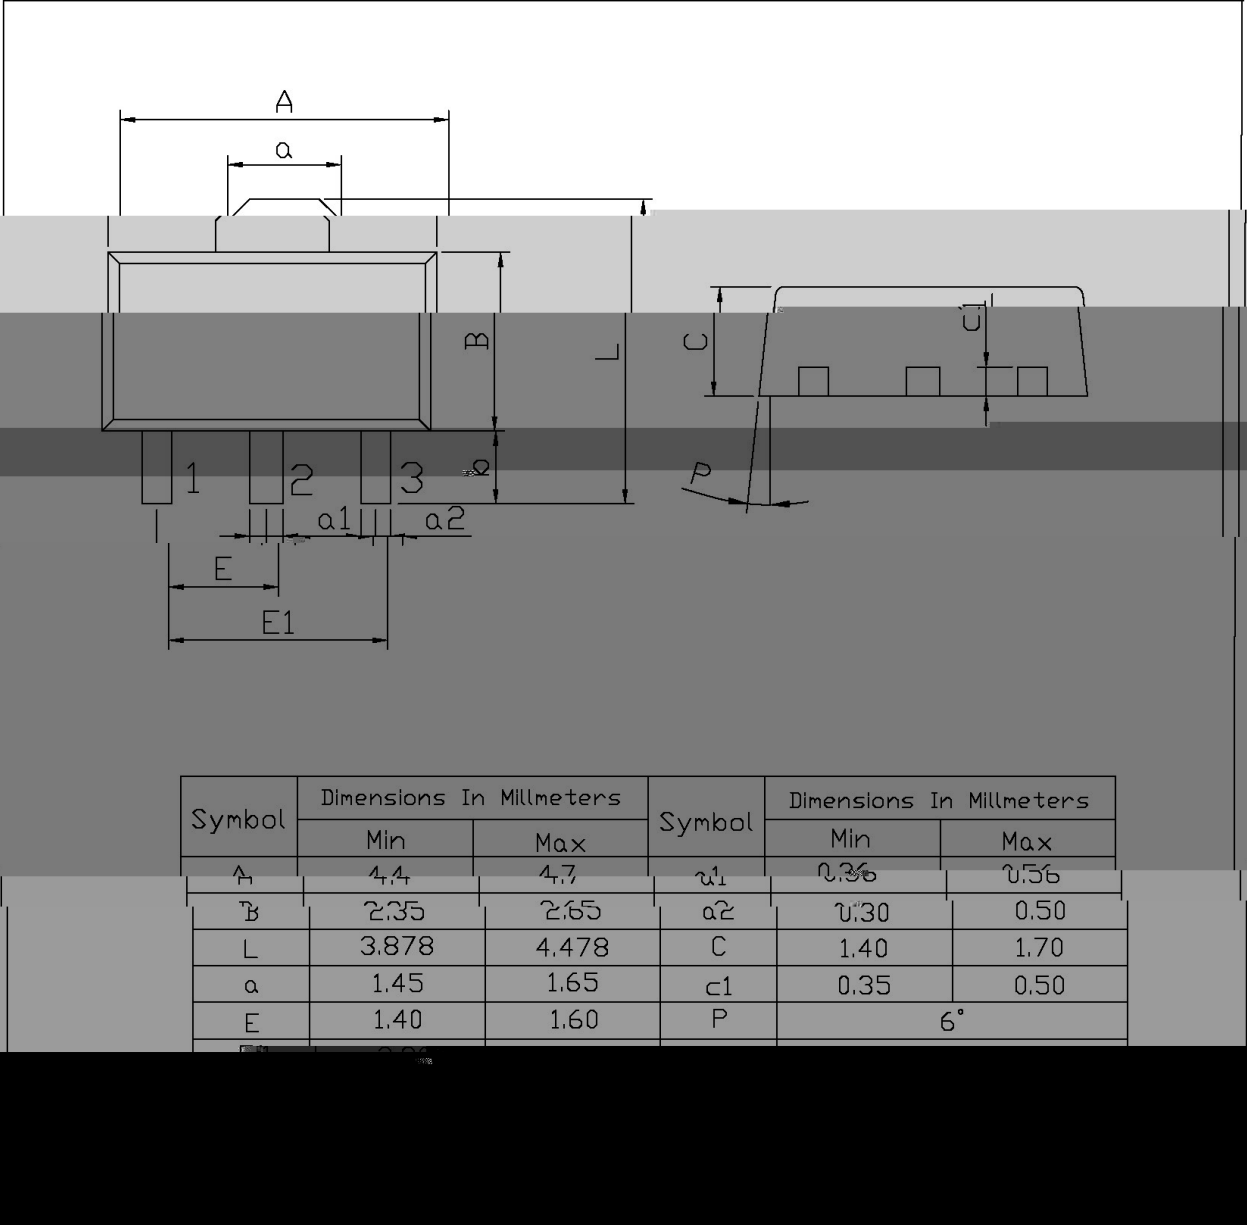

/ Marking Instructions

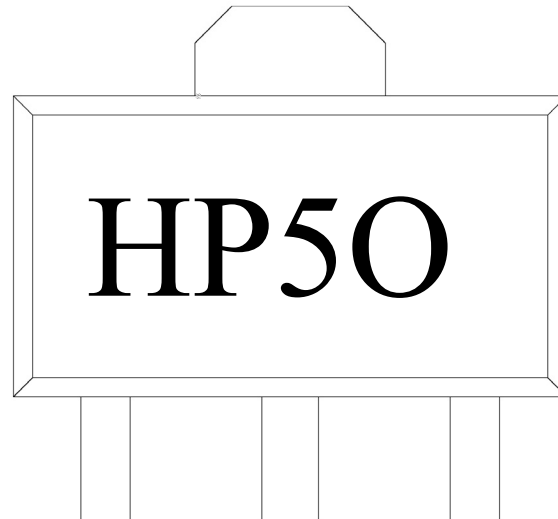

( ) / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

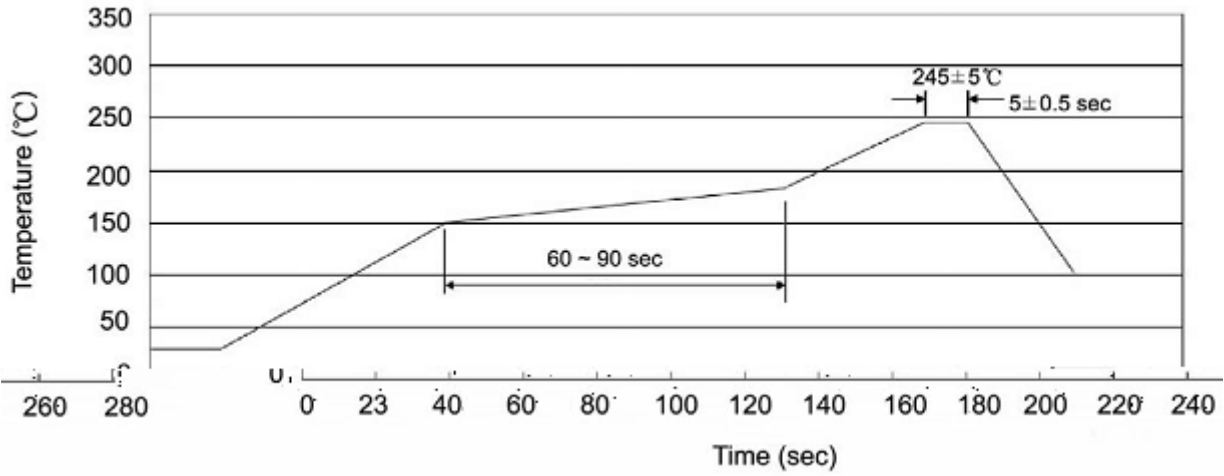

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

| 封装形式   | 包装数量               |                         |                        |                              |                        | 包装尺寸  |             |             |
|--------|--------------------|-------------------------|------------------------|------------------------------|------------------------|-------|-------------|-------------|
|        | Units/Reel<br>只/卷盘 | Reels/Inner Box<br>卷盘/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Reel  | Inner Box 盒 | Outer Box 箱 |
| SOT-89 | 1,000              | 7                       | 7,000                  | 8                            | 56,000                 | 7 ×12 | 180×120×180 | 385×257×392 |

/ Notices