

/ Descriptions


TO-220F NPN

/ Features

KTA1725

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
			℃


/ Electrical Characteristics(Ta=25)

						μ
						μ

/ Electrical Characteristic Curve

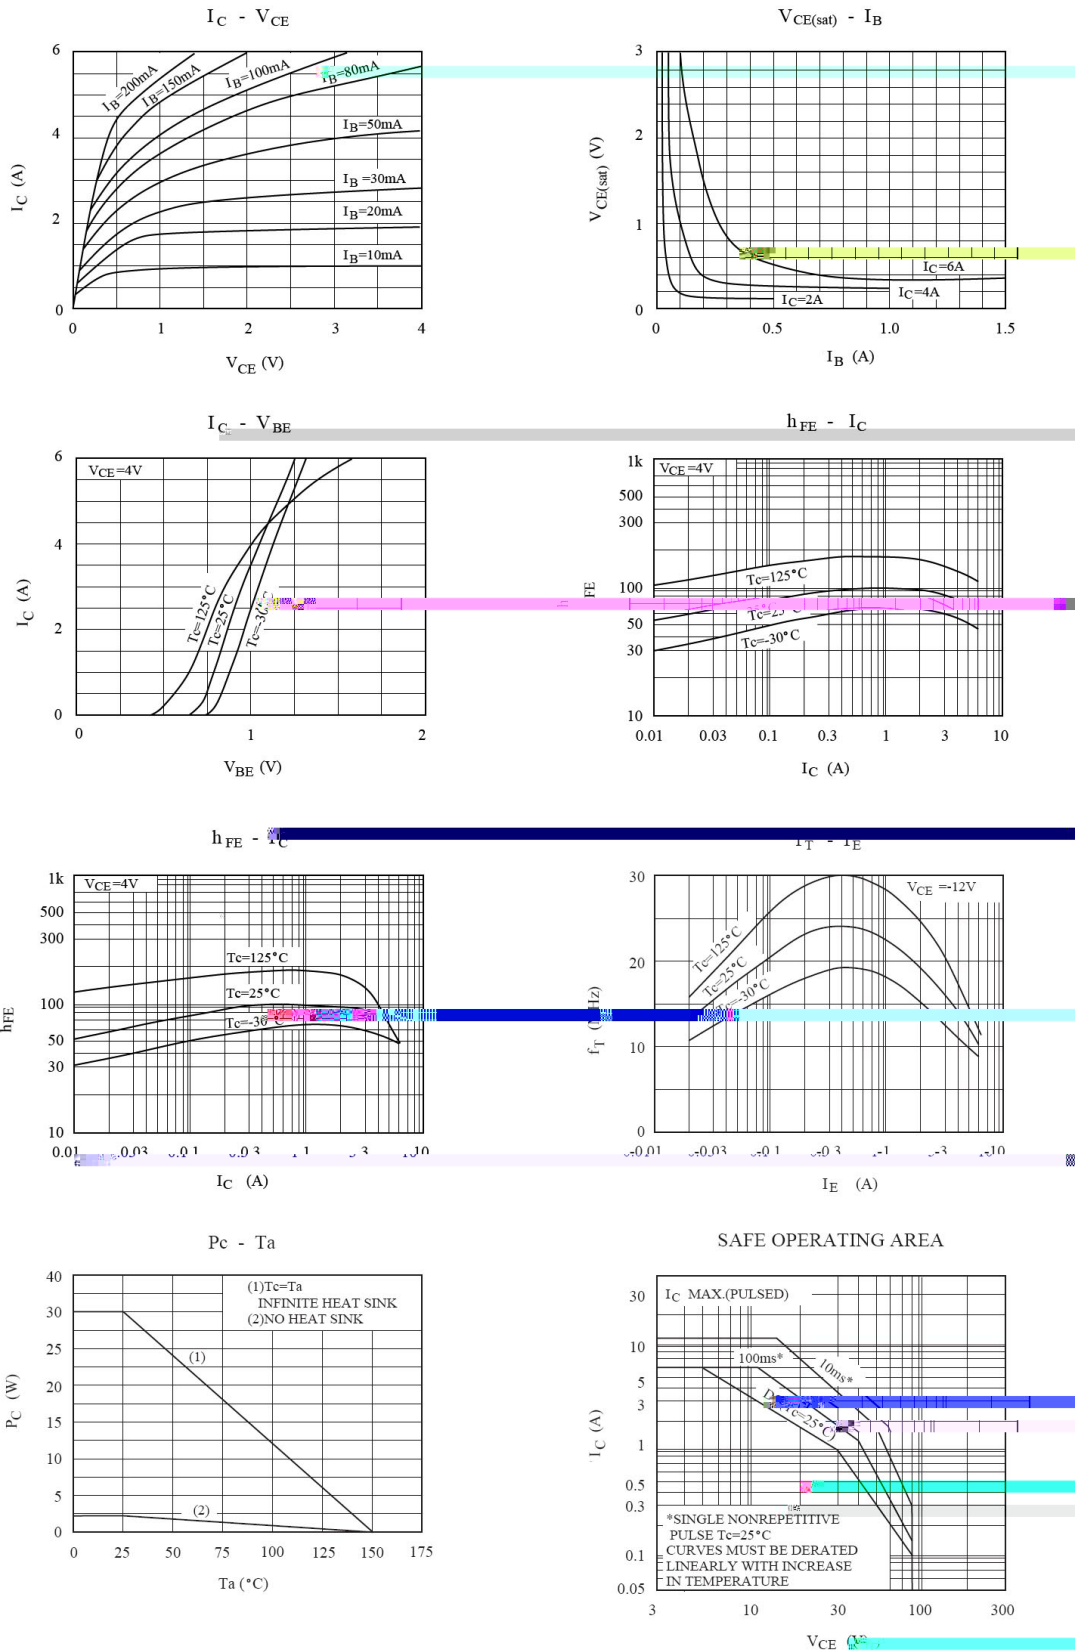

/ Package Dimensions

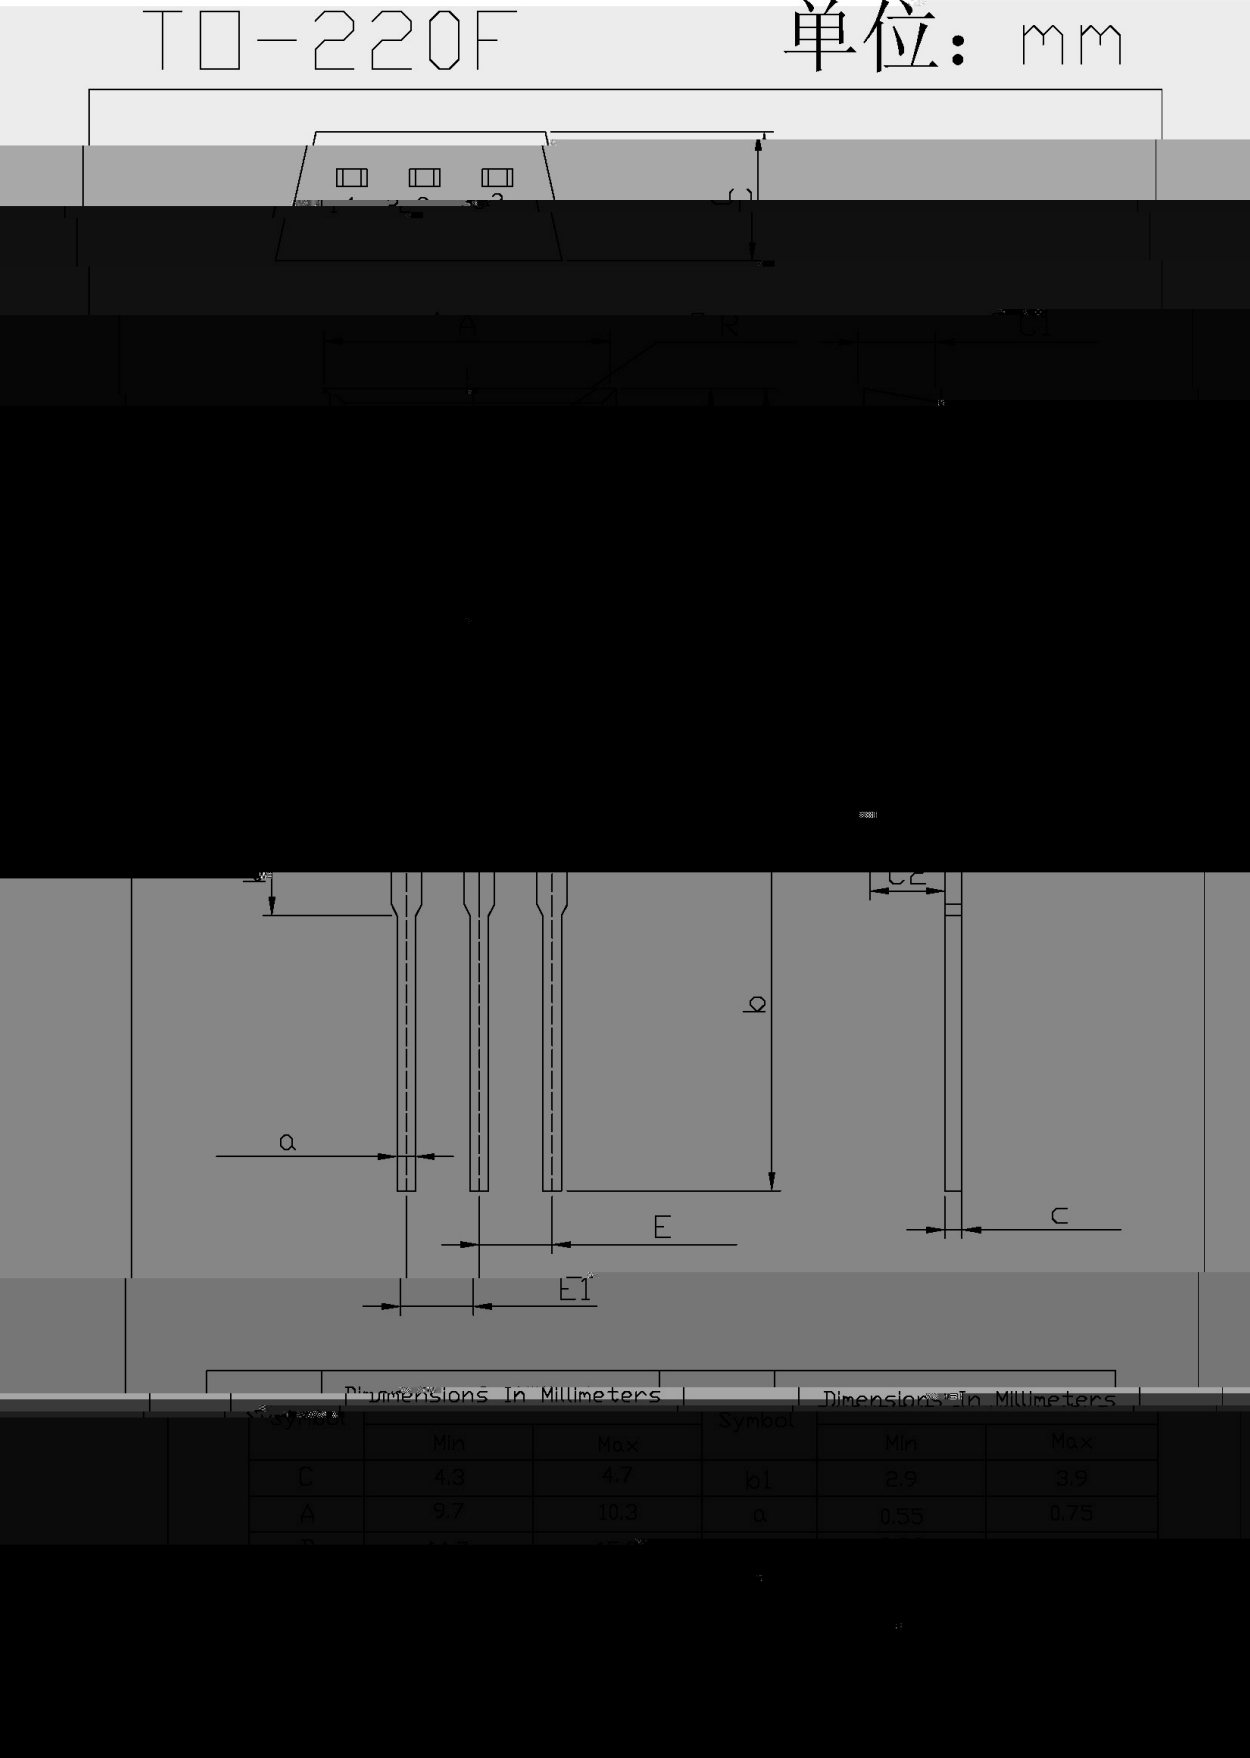

/ Marking Instructions

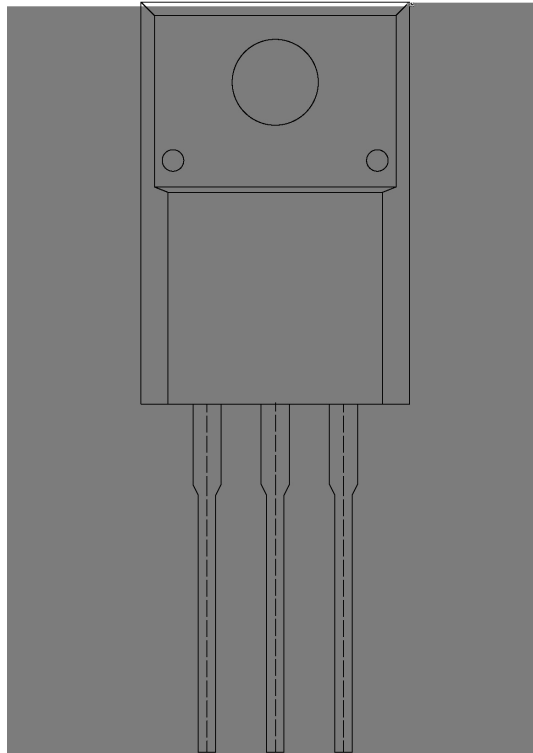


Figure 11 is a line graph showing the temperature dependence of the rate of polymerization. The y-axis is labeled "Temperature (°C)" and ranges from 0 to 300 in increments of 50. The x-axis is labeled "Time (min)" and ranges from 0 to 300 in increments of 50. The graph shows a curve that starts at approximately 70°C at 100 minutes, rises slowly to about 115°C at 255 minutes, then rises sharply to 255°C at 260 minutes. A horizontal line segment at 255°C is labeled "5 - 0.5 sec". After this, the temperature drops sharply to about 180°C at 265 minutes, and then to about 105°C at 270 minutes.

 $\pm$

°C

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱