

KTD1302

TO-92

NPN

$R_{on}=0.6\Omega(Typ.)(I_B=1.0mA)$
 Ω


/ Absolute Maximum Ratings(Ta=25)

	CBO		

/ Electrical Characteristics(Ta=25)

						μ
						μ
						Ω


/ Electrical Characteristic Curve

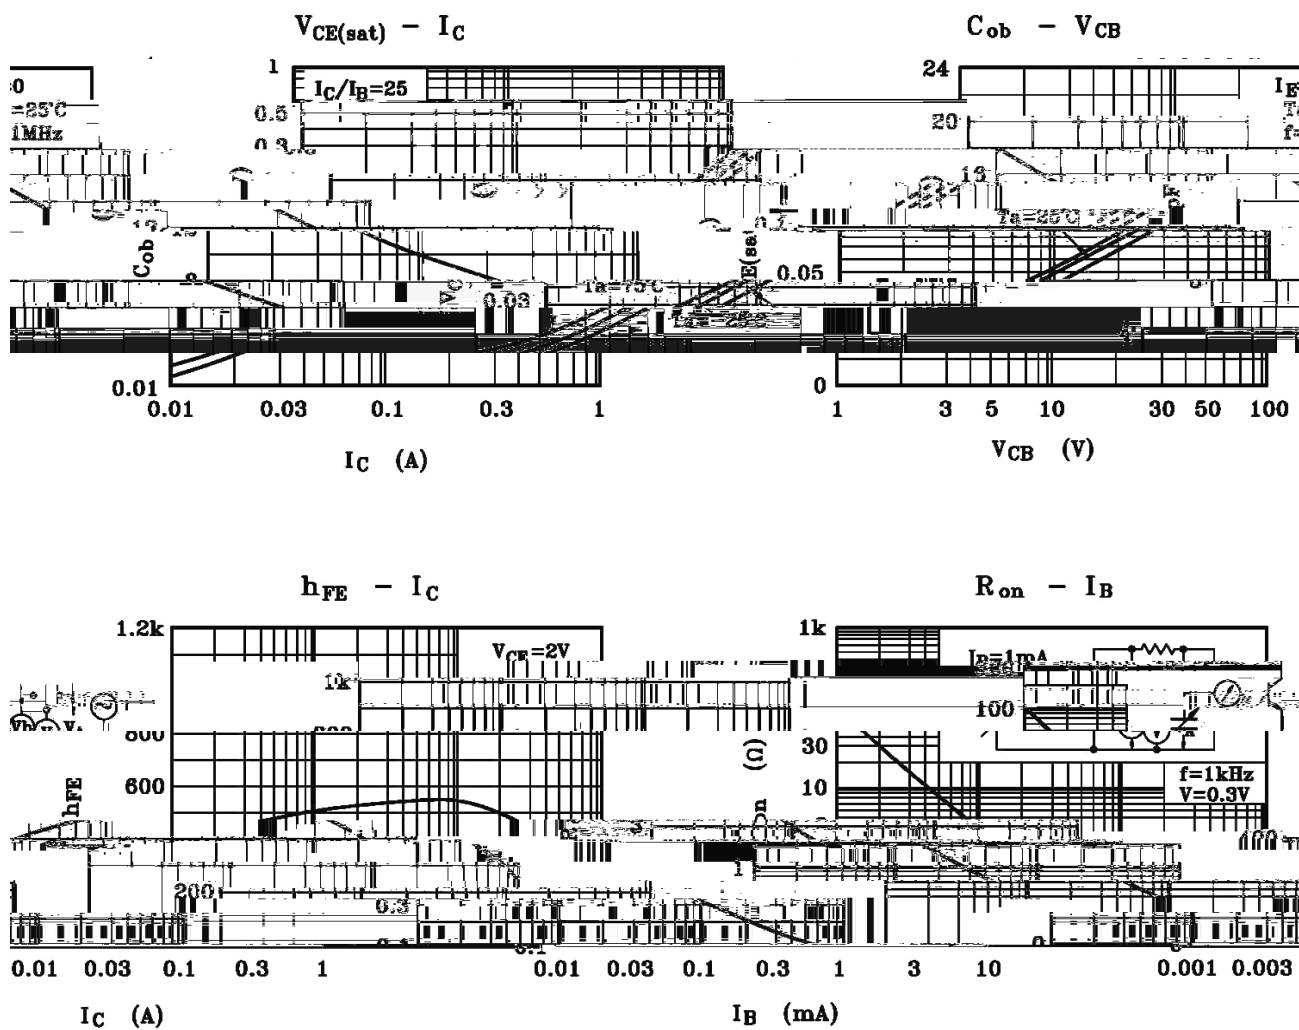


/ Package Dimensions

T0-92

Unit: mm

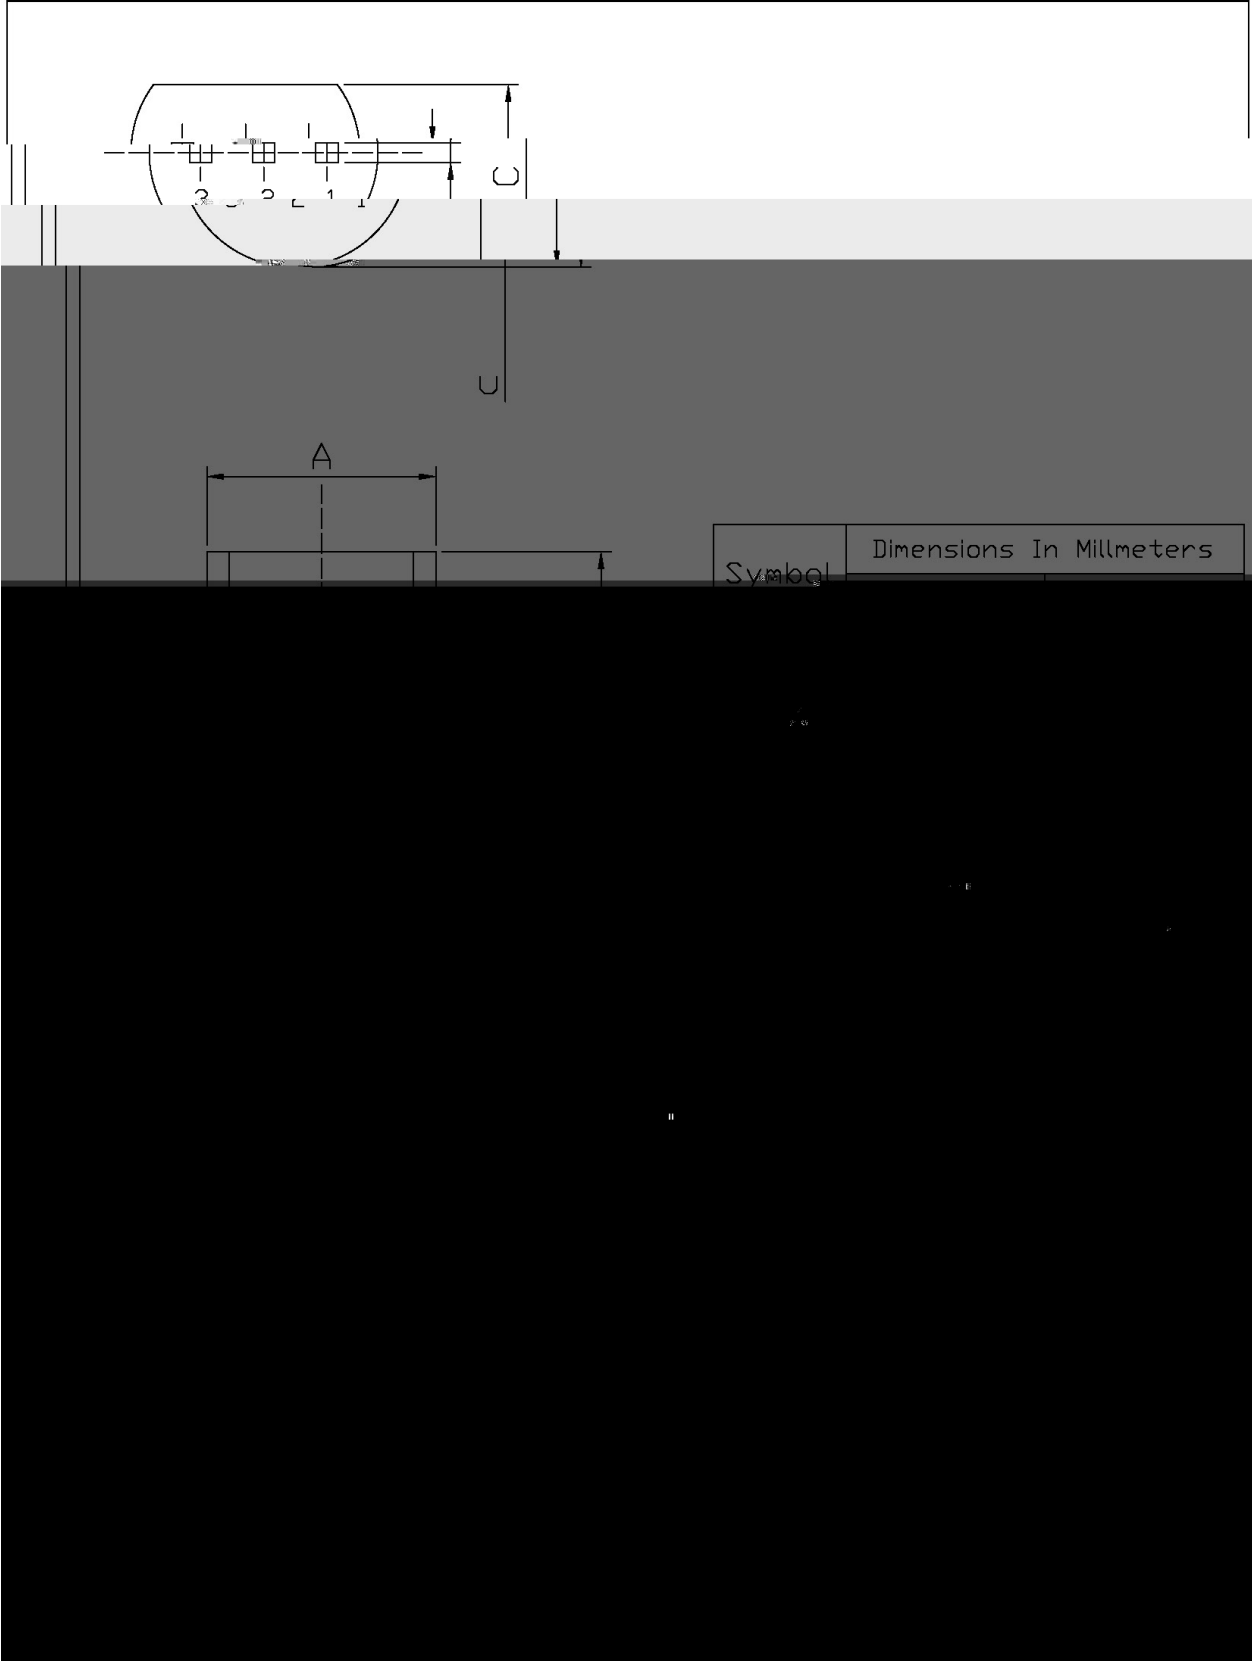


/ Marking Instructions

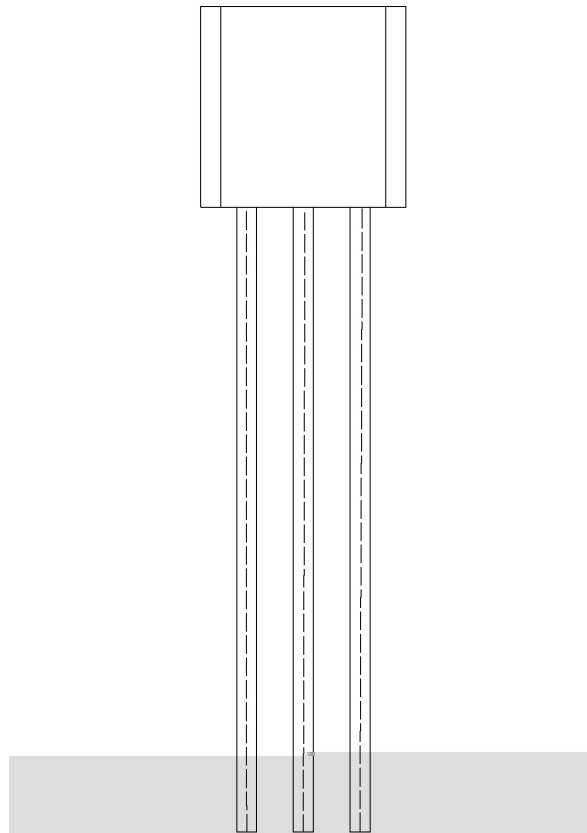

BR:

D1302

() / Temperature Profile for Dip Soldering(Pb-Free)

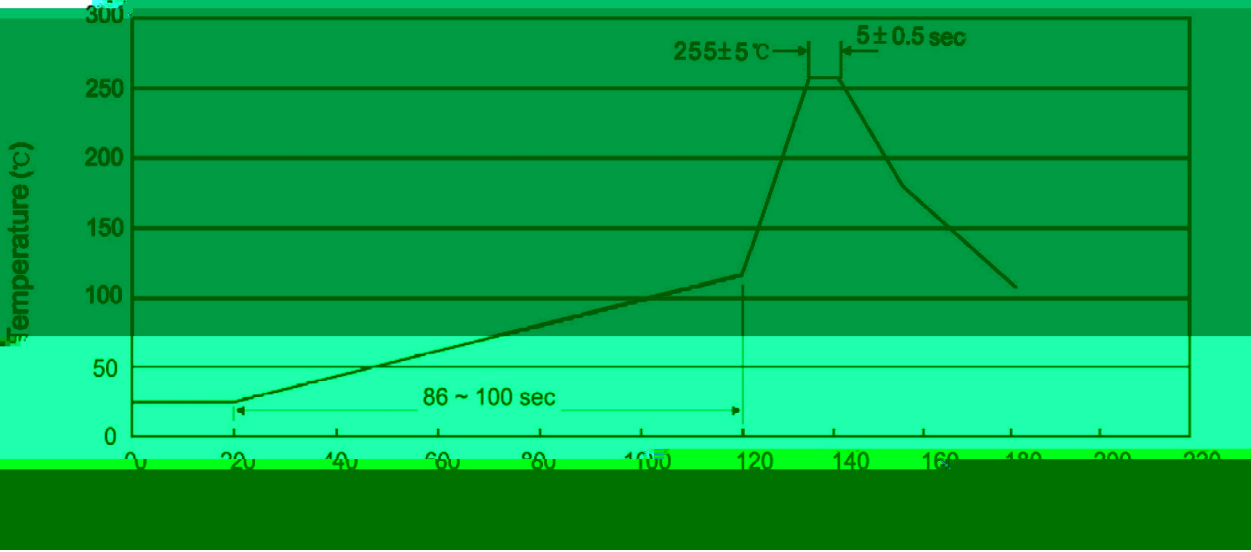

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸 :	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱
							小箱 , 大箱

/ Notices