


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit







/ Pinning

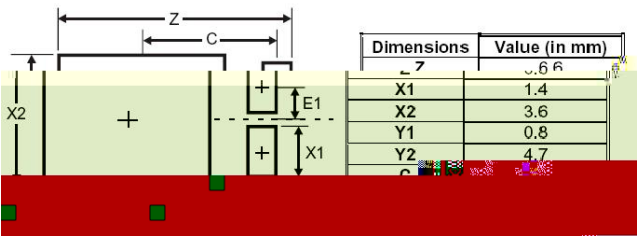


/ h_{FE} Classifications & Marking

LV15S60E


/ Electrical Characteristic Curve

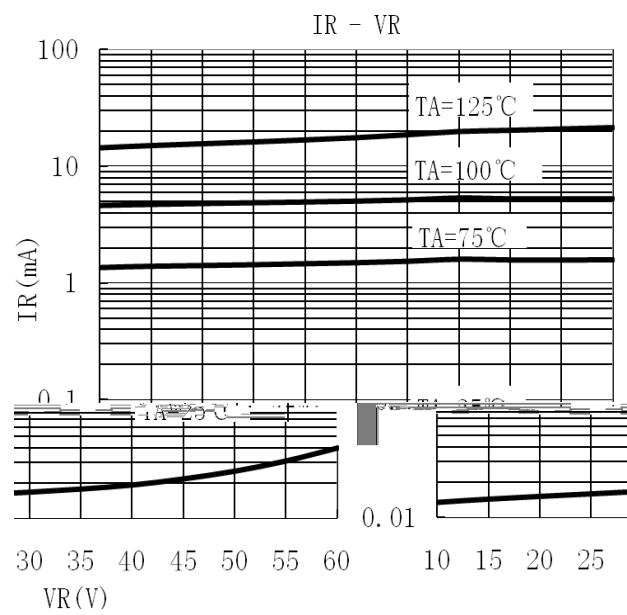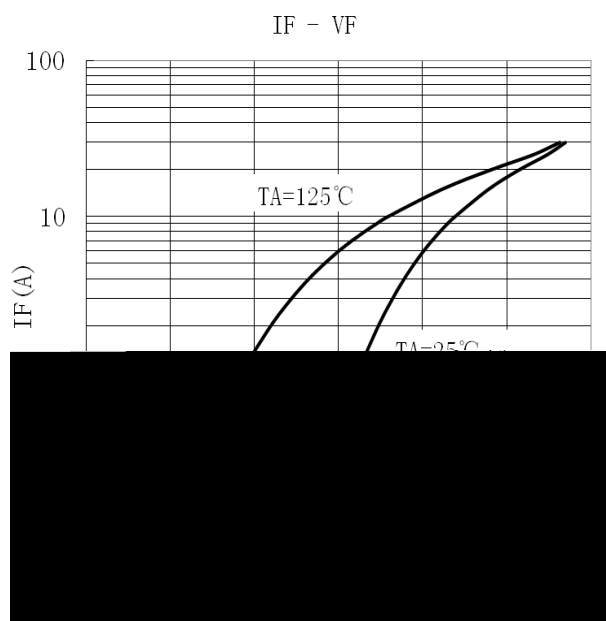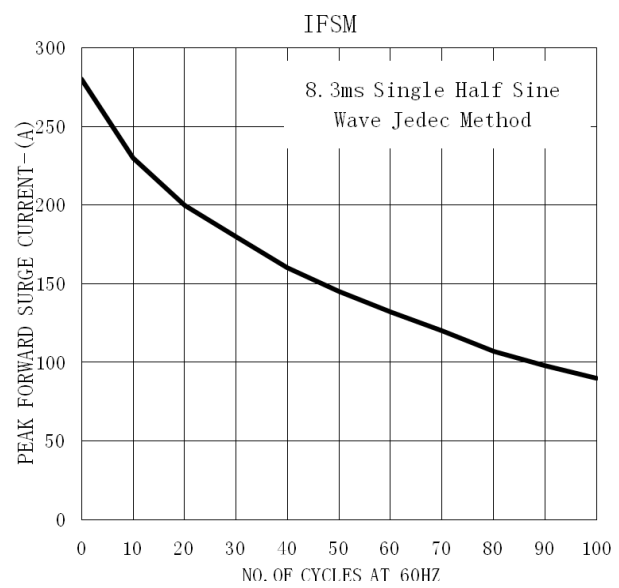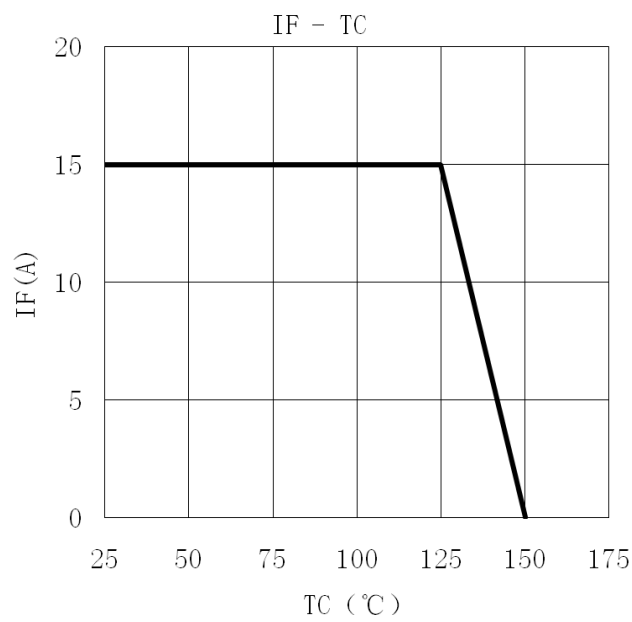

/ Package Dimensions

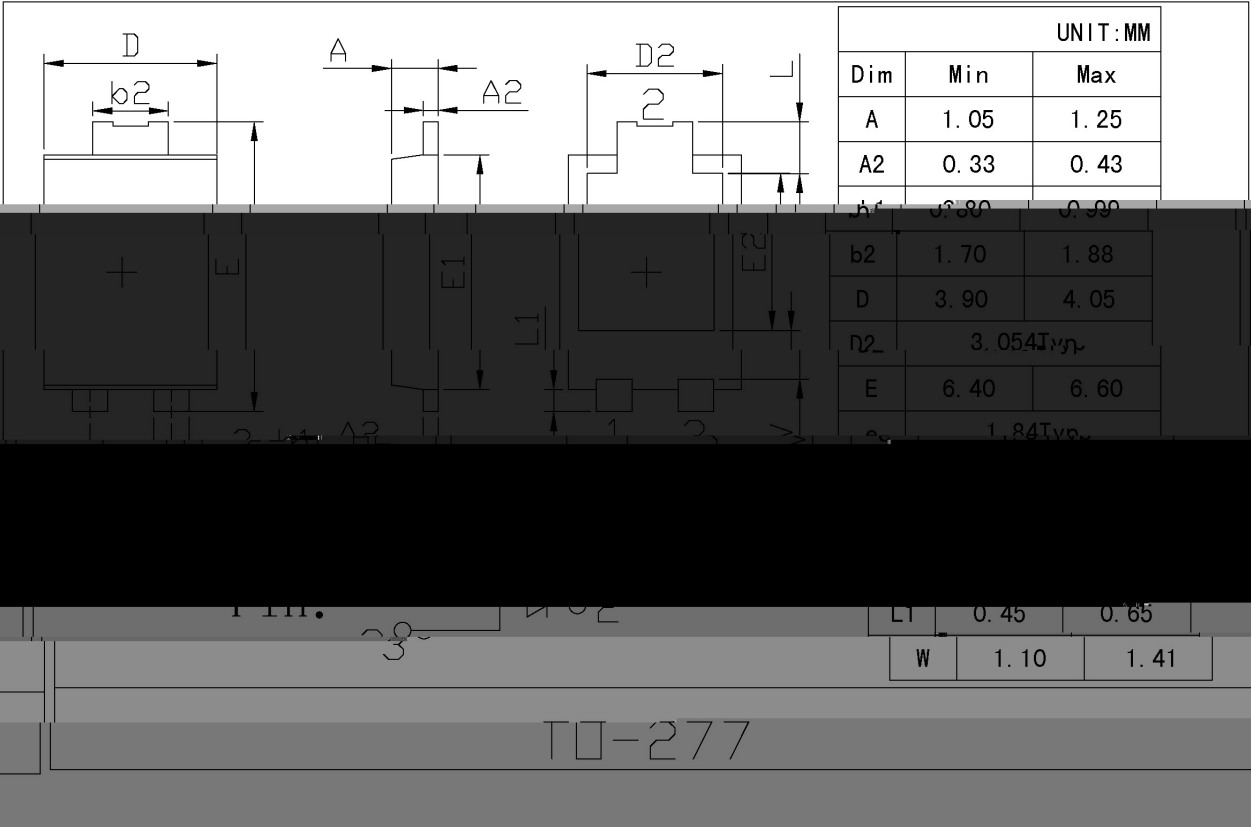


/ Marking Instructions

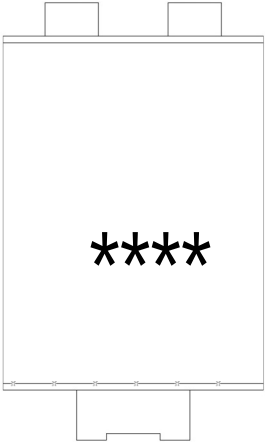

48V93

48V93

() /

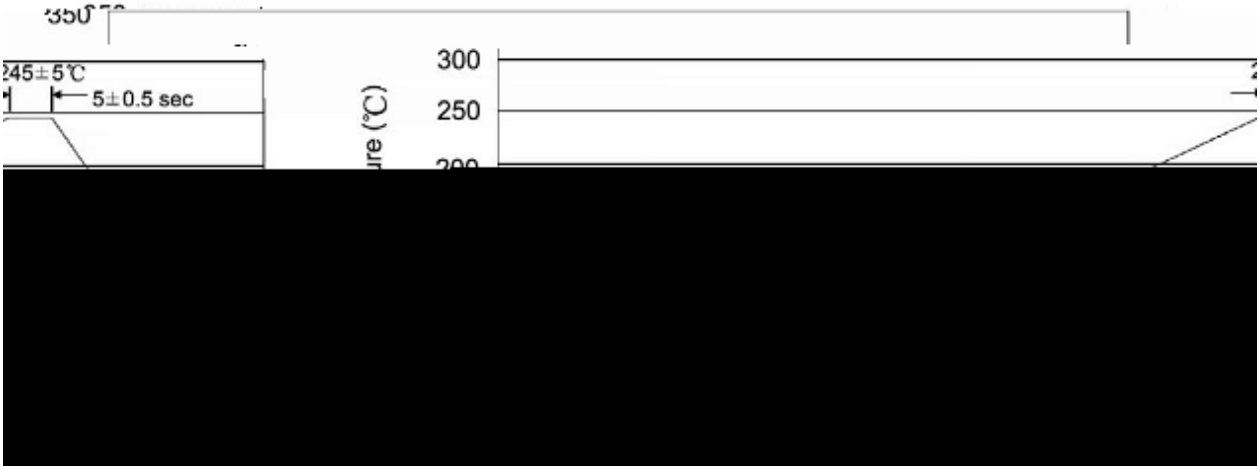

2 3/8 3/8 2 3/8 2 3/8 3/8

/ Resistance to Soldering Heat Test Conditions

2 3/8 2

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-277	5,000	3	15,000	6	90,000	13" ×12	360×360×50	380×335×366

/ Notices