

/ Descriptions

TO-263


/ Features

/ Applications

OR-ing

DC-DC

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)





	θ		℃
			℃

/ Electrical Characteristics(Ta=25)

		℃				
		℃				

1.
2.

/ Electrical Characteristic Curve

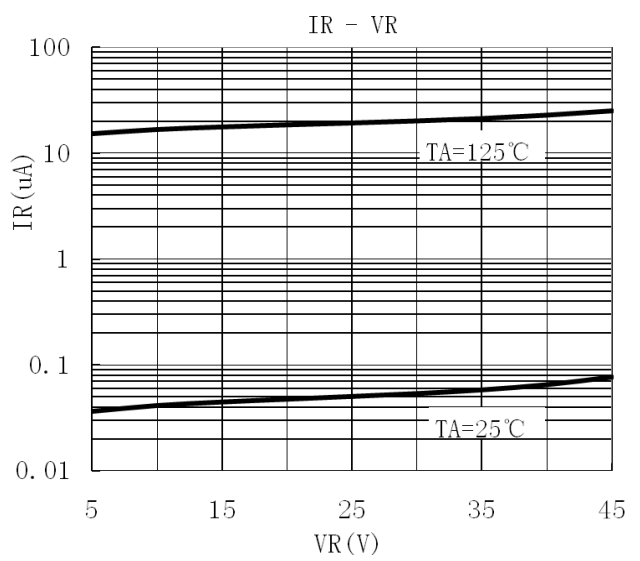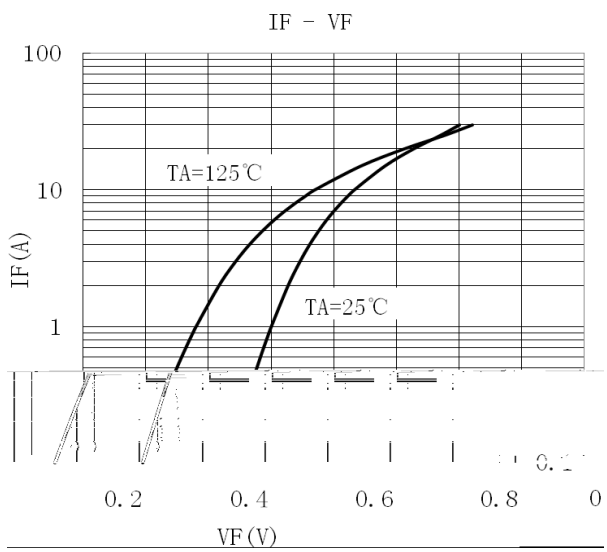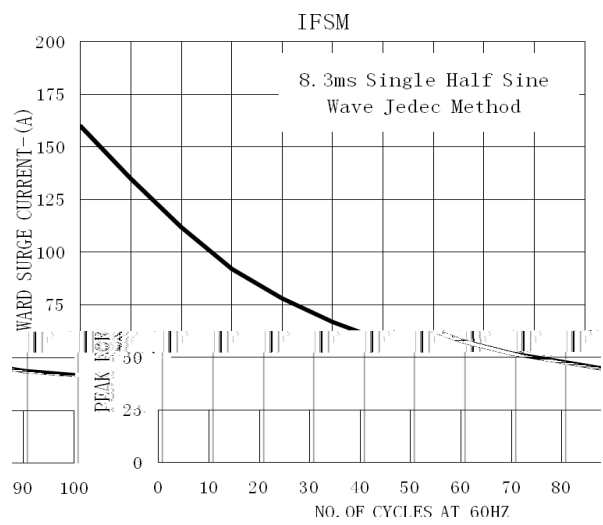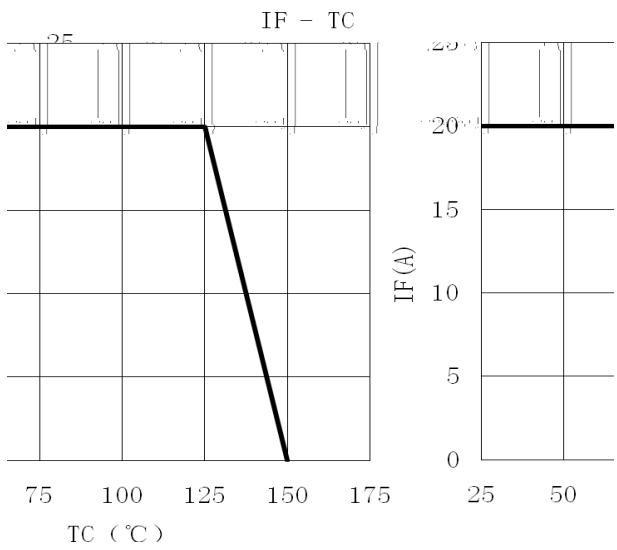


[illegible]

単位: mm							
ers	Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters		
		Min	Max		Min	Max	
		A	4.30		4.70	E _L	9.00
	B	1.00	1.40	e ₁ ²	2.34	2.74	

TII-263

/ Marking Instructions

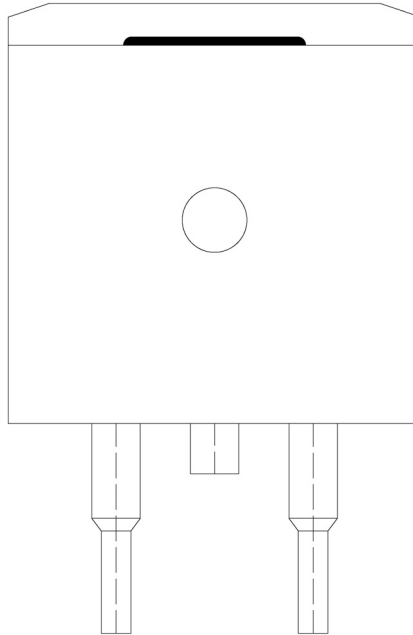

BR


LV2045

CT:

LV2045

CT

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

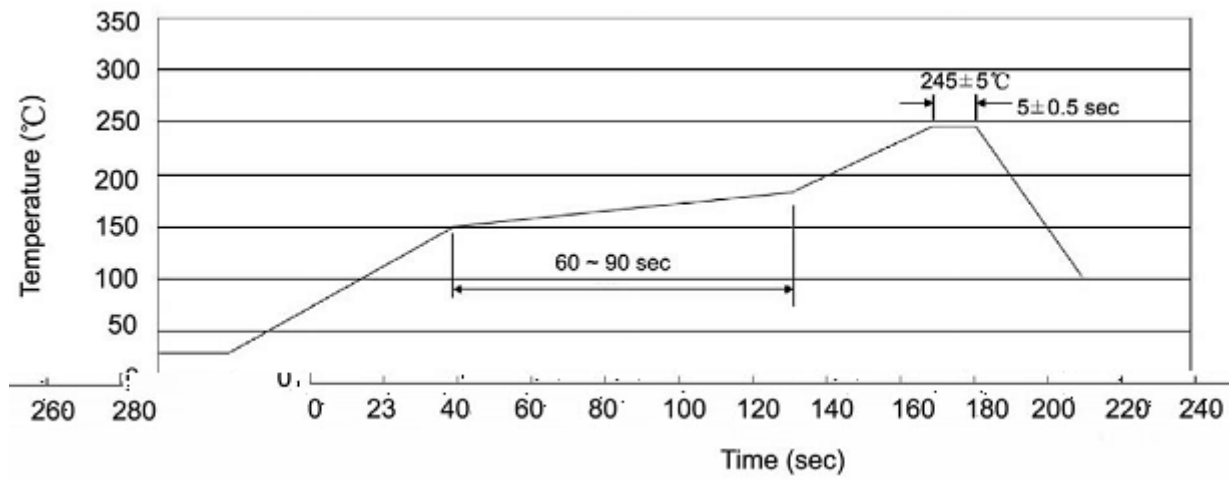

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

/ Notices