

## / Descriptions

TO-220F


## / Features

## / Applications

OR-ing

DC-DC

## / Equivalent Circuit



## / Pinning



## / $h_{FE}$ Classifications & Marking


/ Absolute Maximum Ratings(Ta=25 )

|  |   |  |  |
|--|---|--|--|
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  | θ |  |  |
|  |   |  |  |


/ Electrical Characteristics(Ta=25 )

|  |  |  |  |  |  |   |
|--|--|--|--|--|--|---|
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  |   |


/ Electrical Characteristic Curve

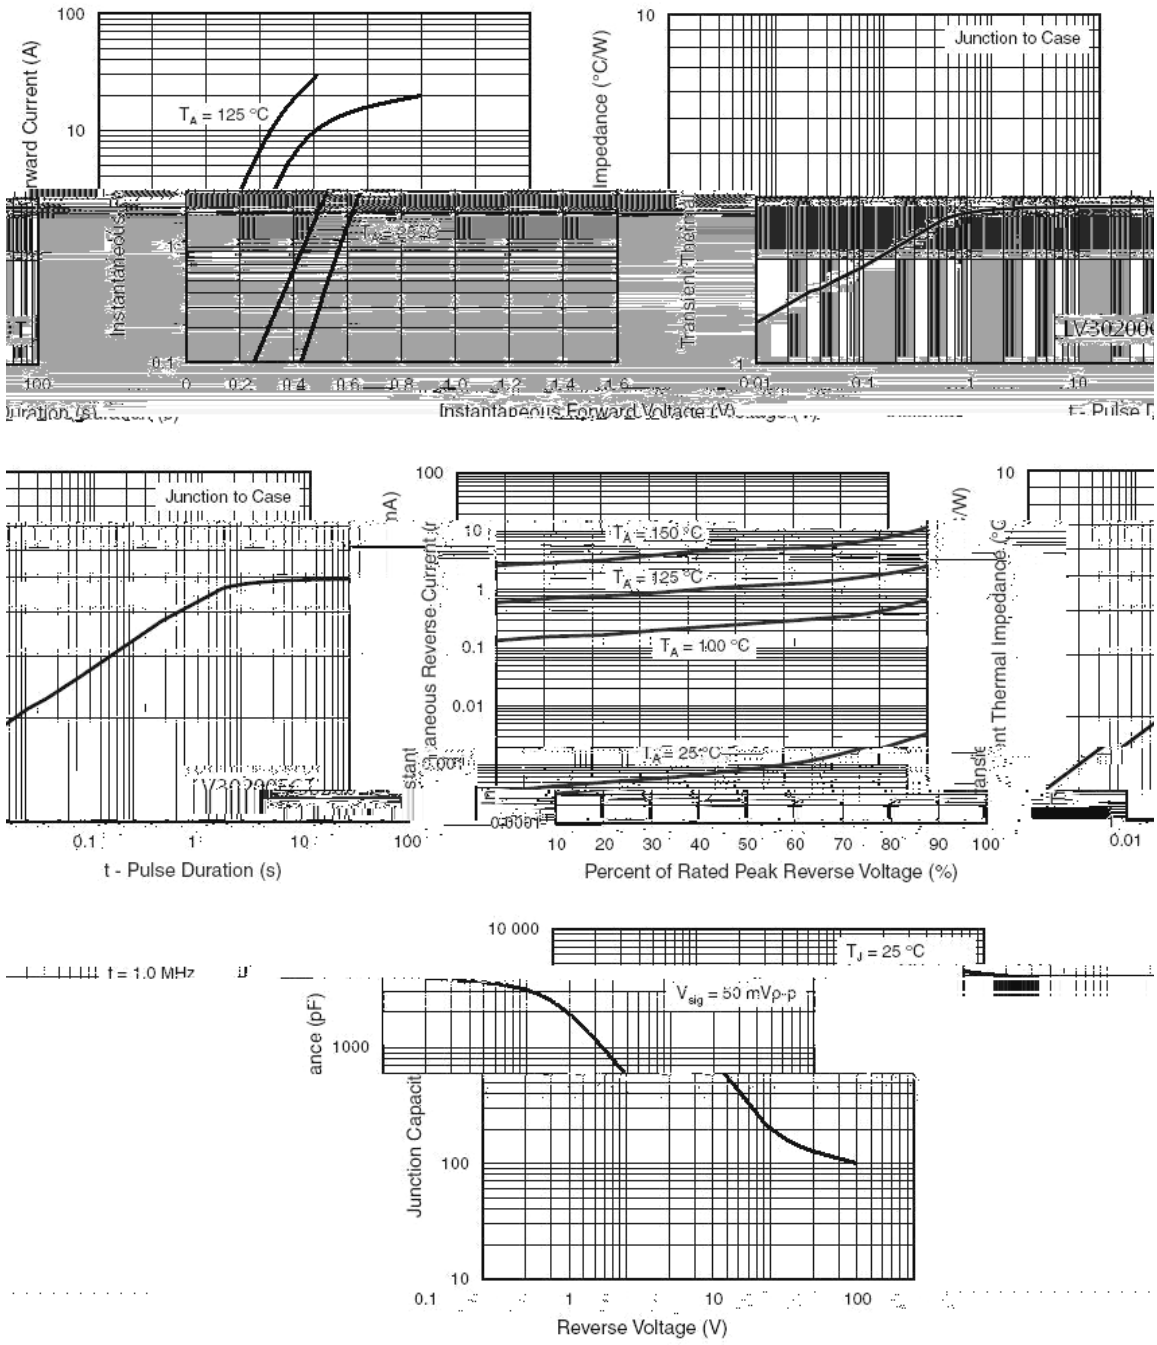

/ Package Dimensions

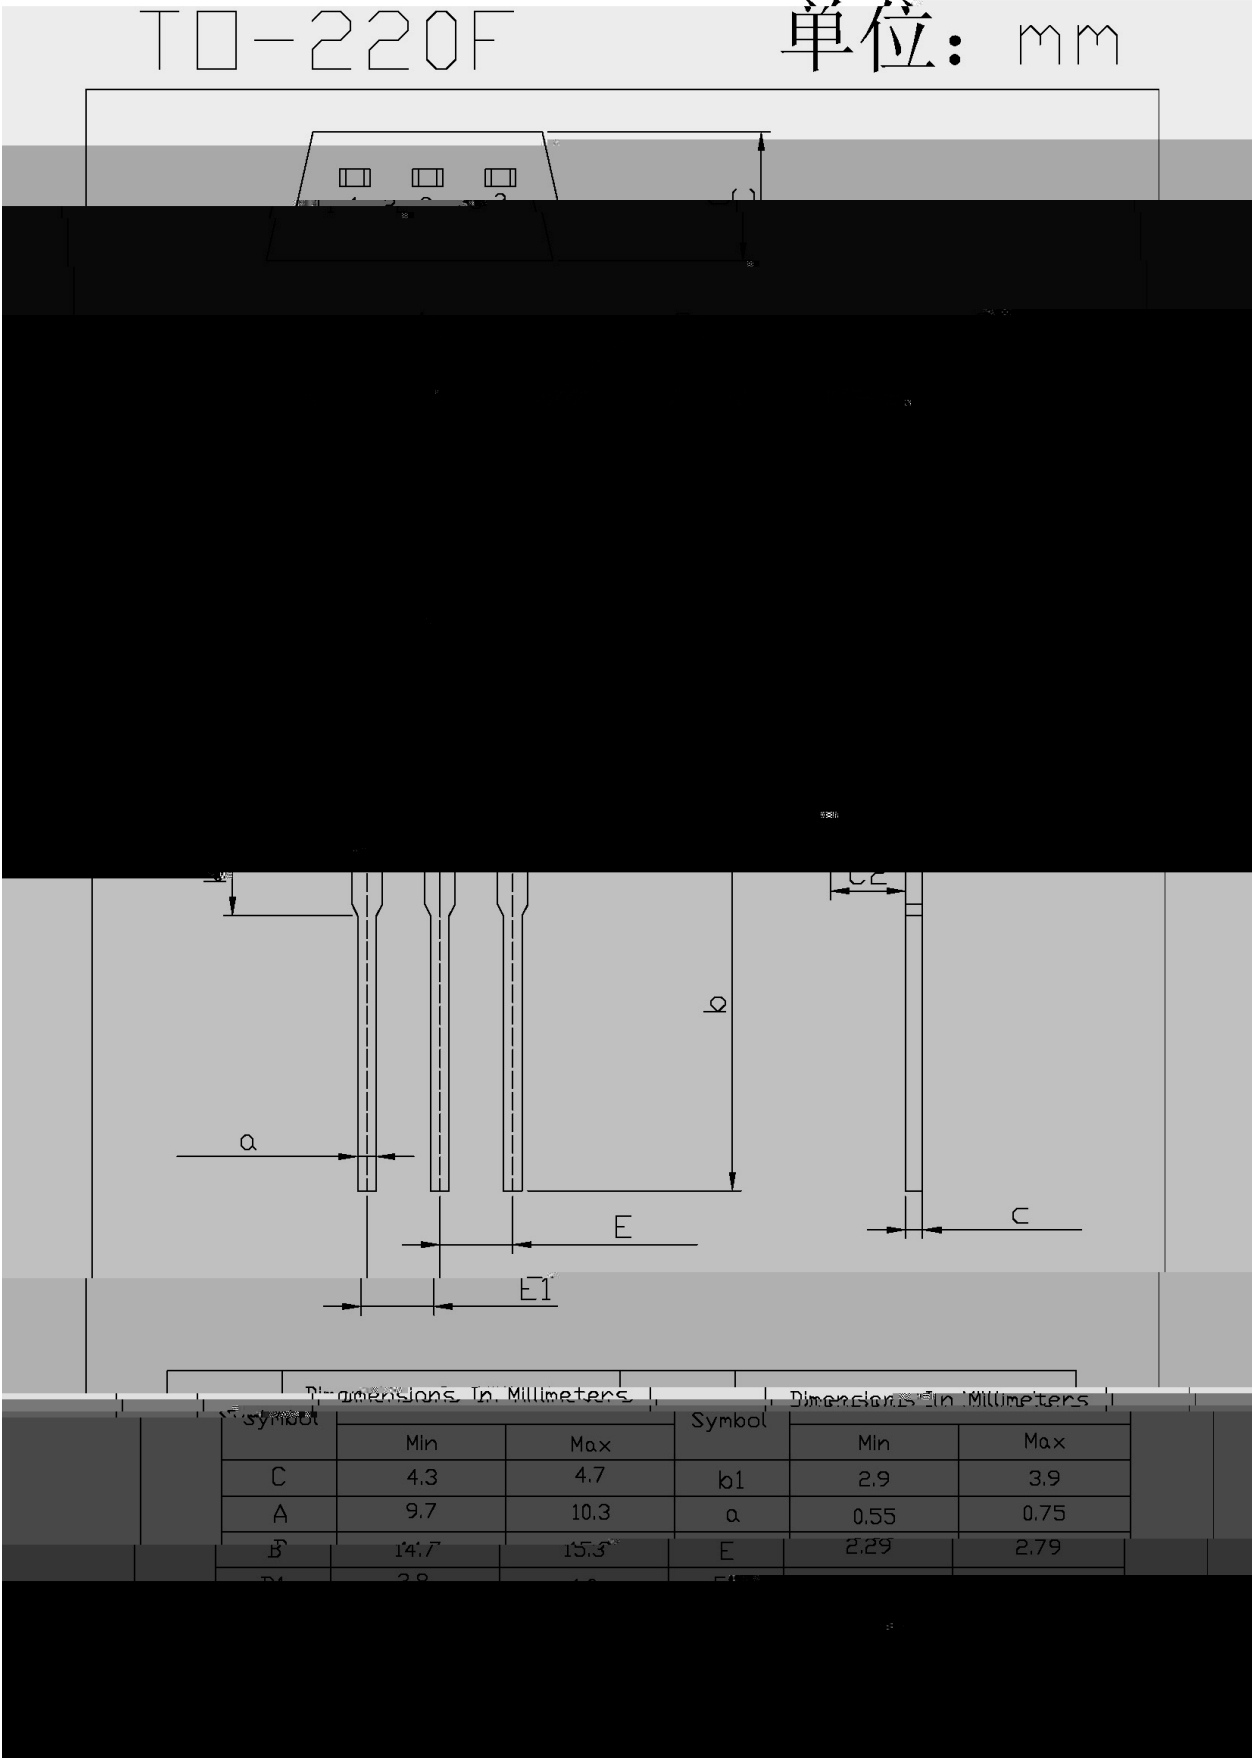

/ Marking Instructions

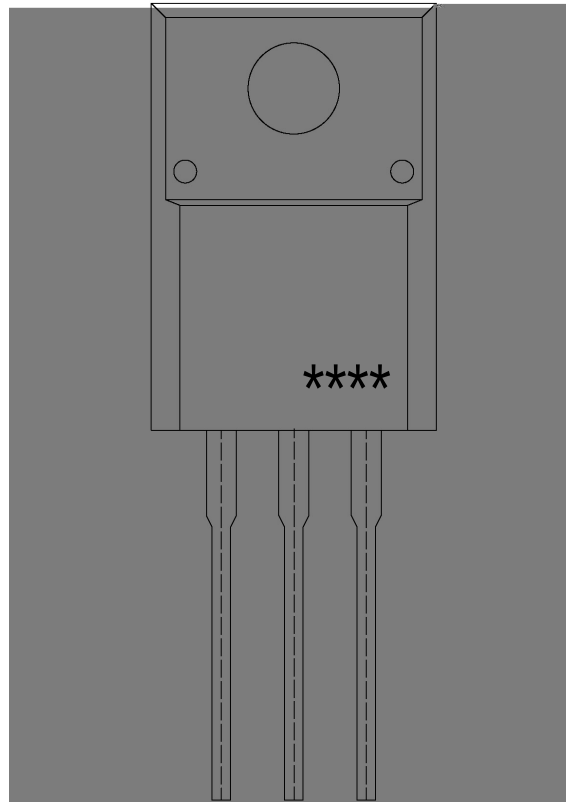

BR

LV30200

F:


CT:

\*\*\*\*

LV30200

CT

(     ) / Temperature Profile for Dip Soldering(Pb-Free)

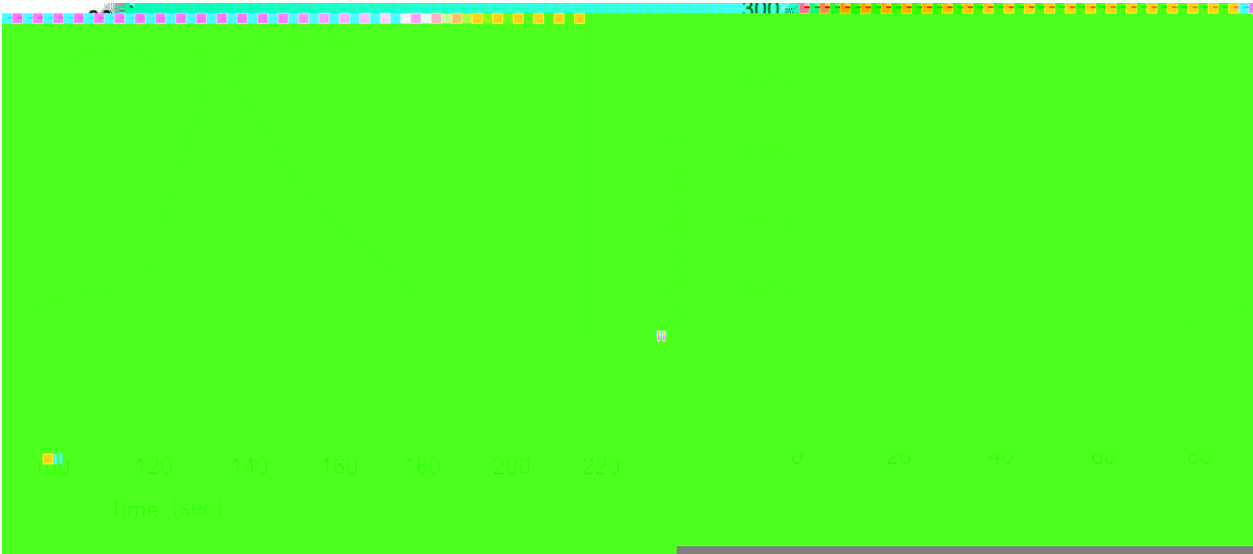

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

|  |                |                     |                      |                            |            |
|--|----------------|---------------------|----------------------|----------------------------|------------|
|  | Units/Bag<br>/ | Bags/Inner Box<br>/ | Units/Inner Box<br>/ | In Iron Out<br>In Iron Out | 0516226941 |
|--|----------------|---------------------|----------------------|----------------------------|------------|