


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

	θ		
		~	

/ Electrical Characteristics(Ta=25)



	()					μ

:


。

。


/ Electrical Characteristic Curve

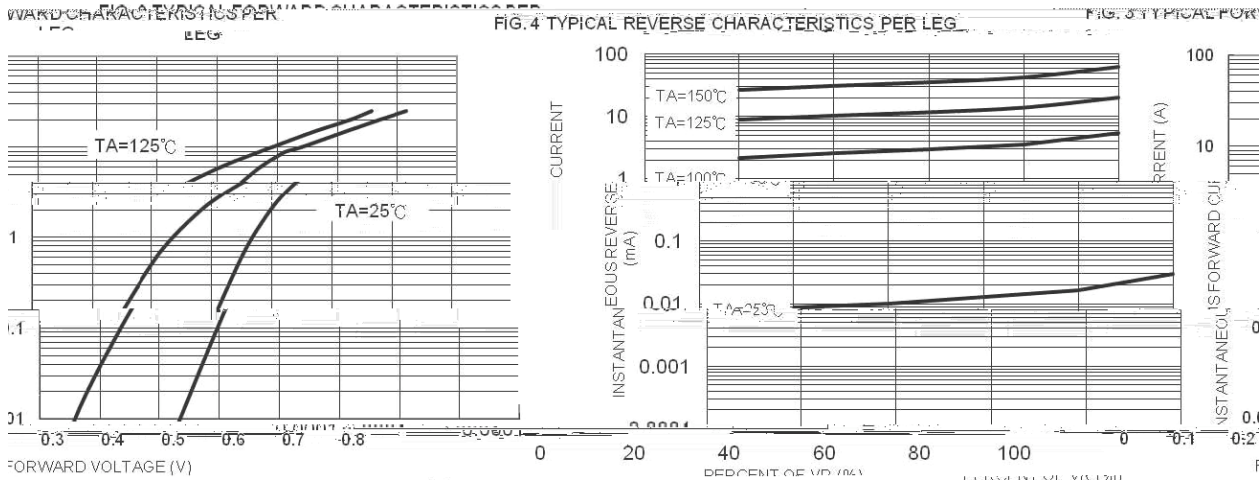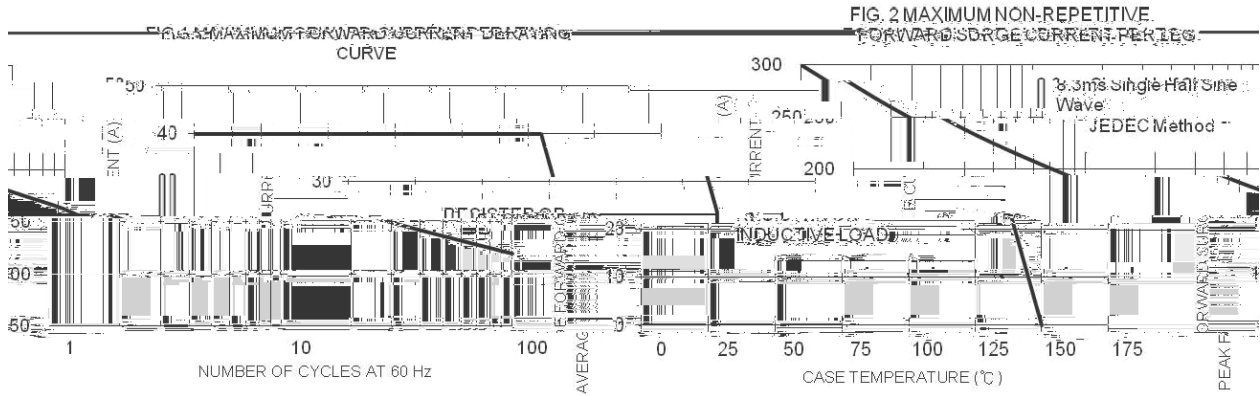


/ Package Dimensions

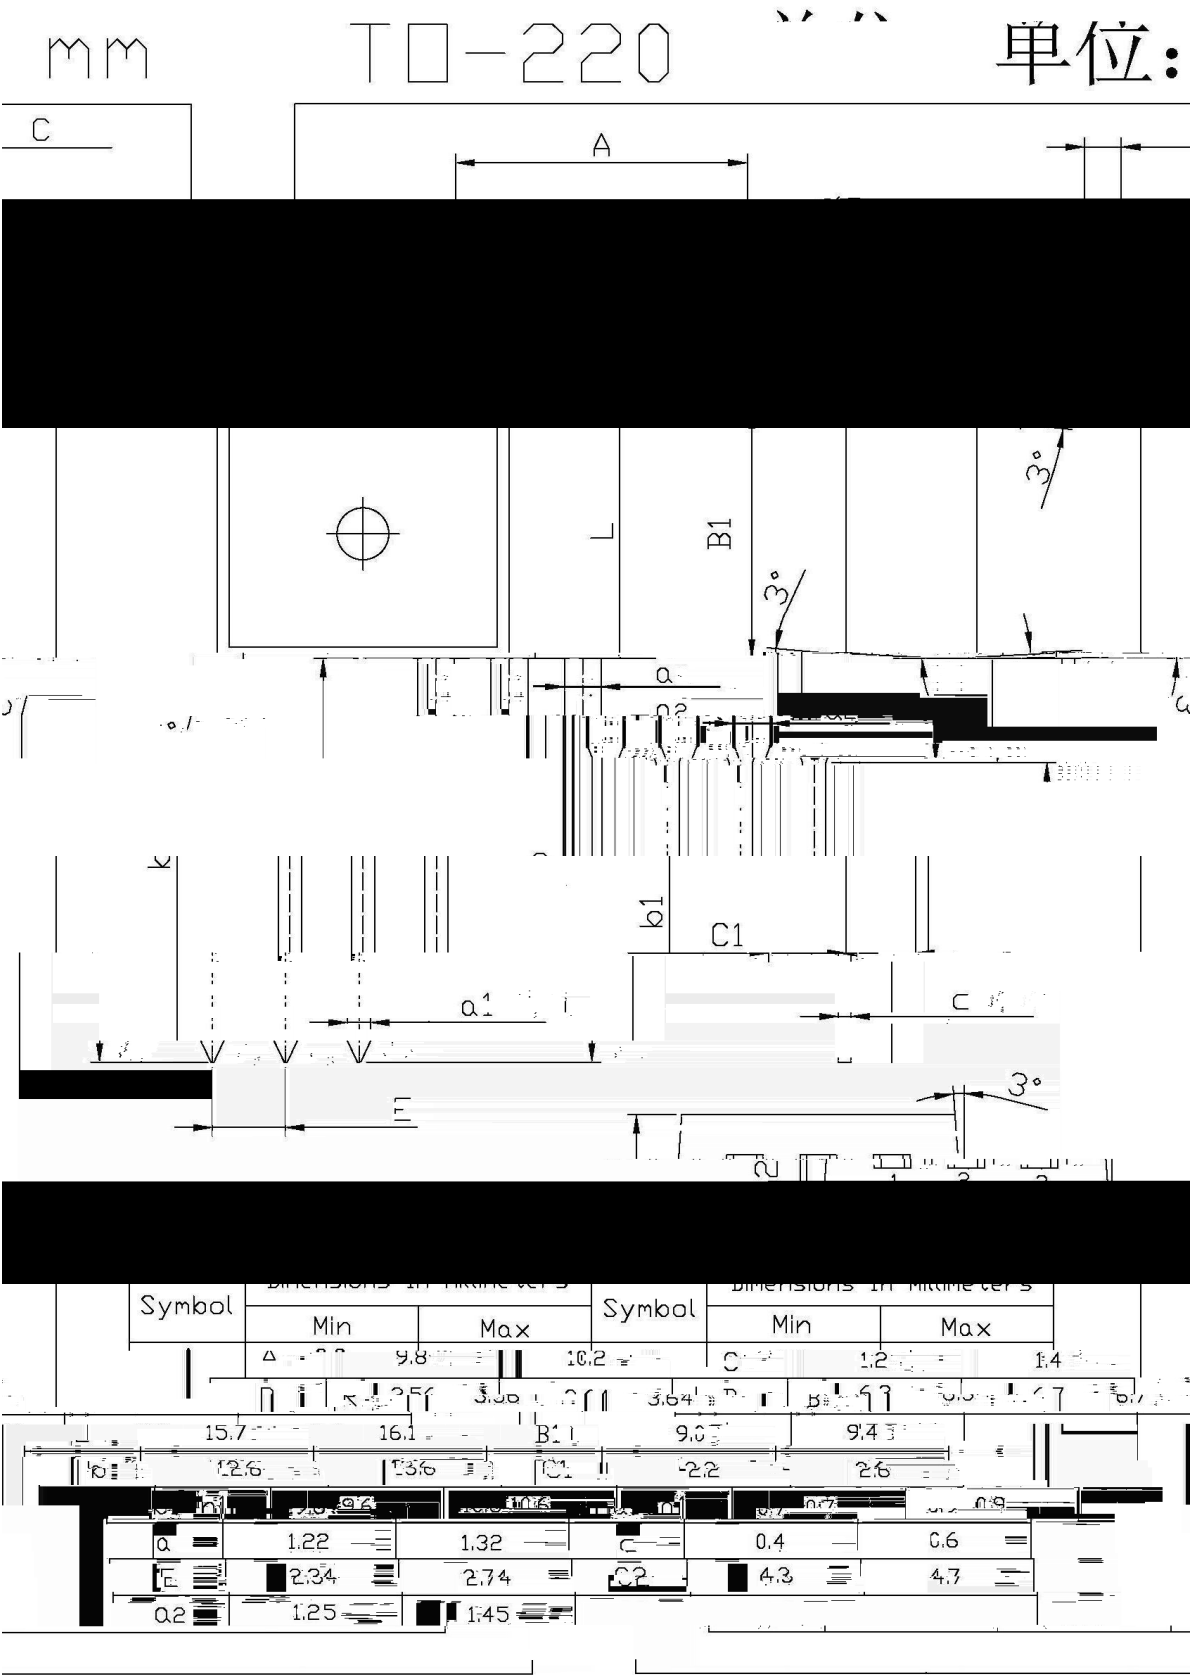

/ Marking Instructions

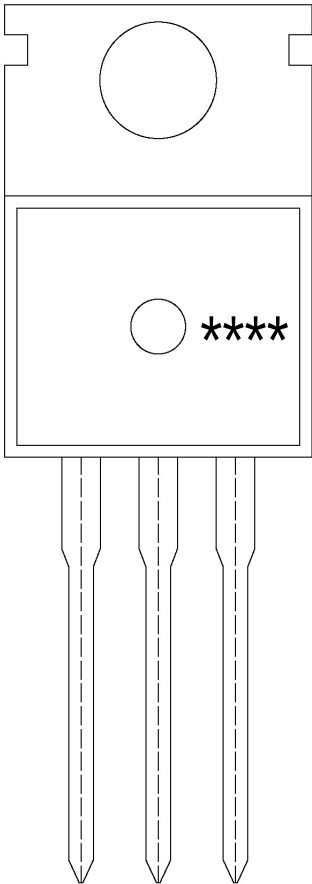

() / Temperature Profile for Dip Soldering(Pb-Free)

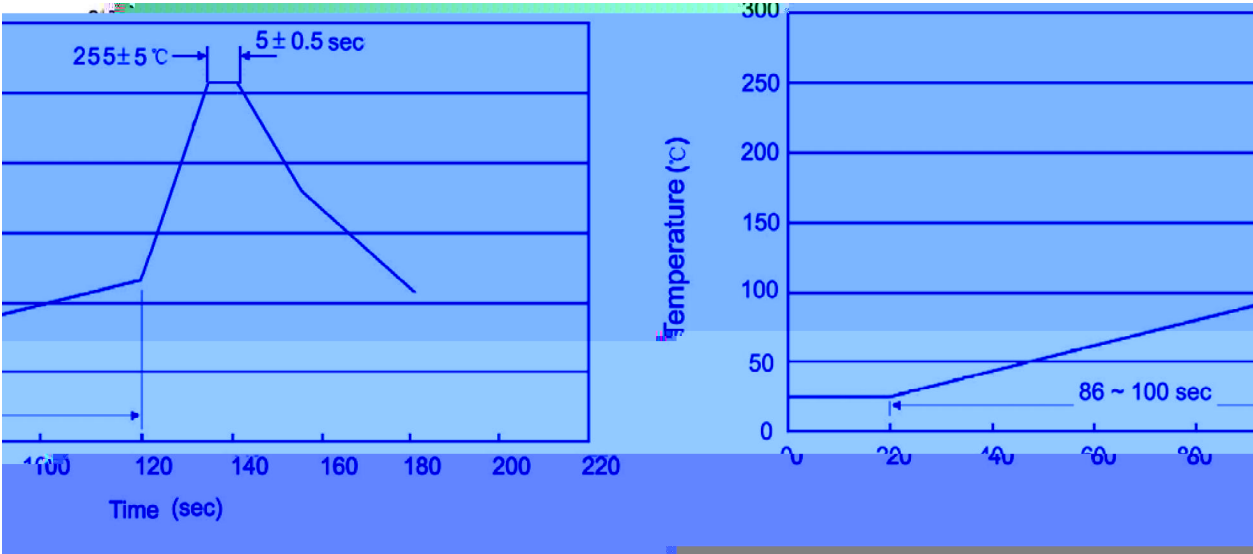

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量			包装尺寸	:
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒		