

/ Revised record

D	2017-5				
E	2021-1-27	4/7	0.5-0.8	e0.5-0.7 5 7	

/ Descriptions


/ Features

40V~200V 2.0A

/ Applications

.

/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)



/ Marking



/ Absolute Maximum Ratings(Ta=25)

							℃							
							℃							
							℃							


× ×)

/ Electrical Characteristics(Ta=25)

			数值				
		℃					
		℃					




/ Electrical Characteristic Curve






/ Package Dimensions

MBF

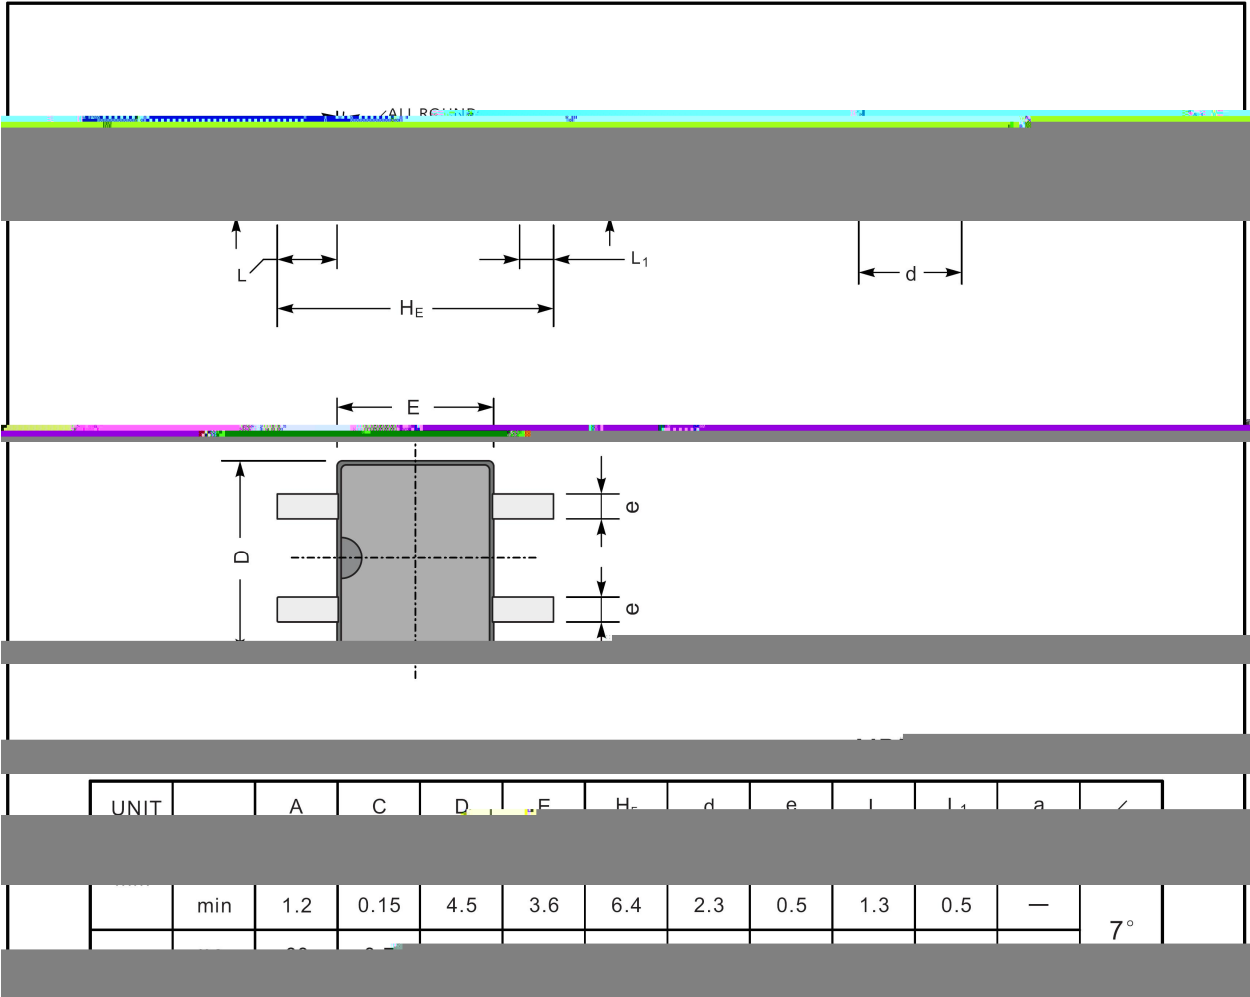


/ Marking Instructions

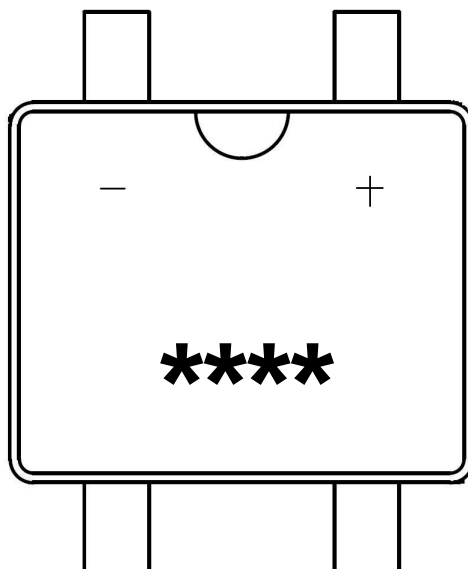

MB24F



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

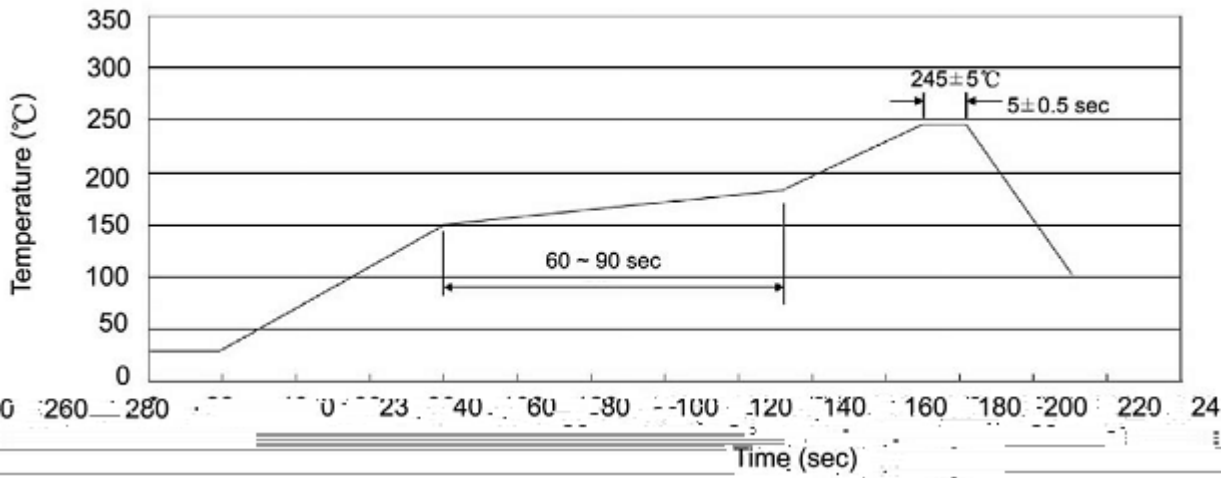

± °C ± °C ± °C ± °C

/ Resistance to Soldering Heat Test Conditions

± °C ± °C ± °C ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱