


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




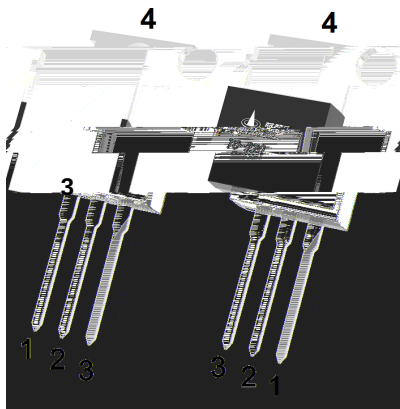


/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

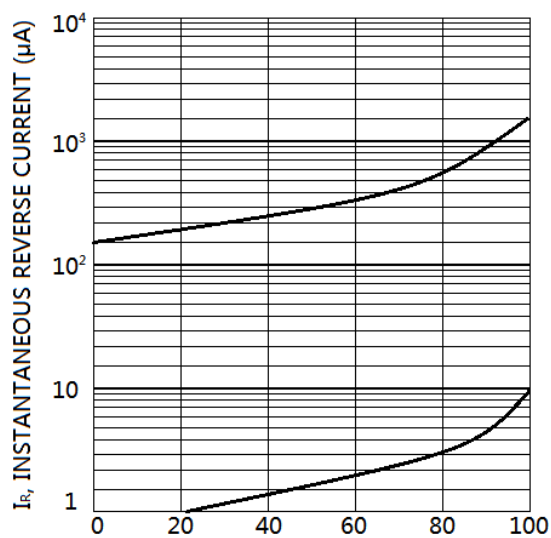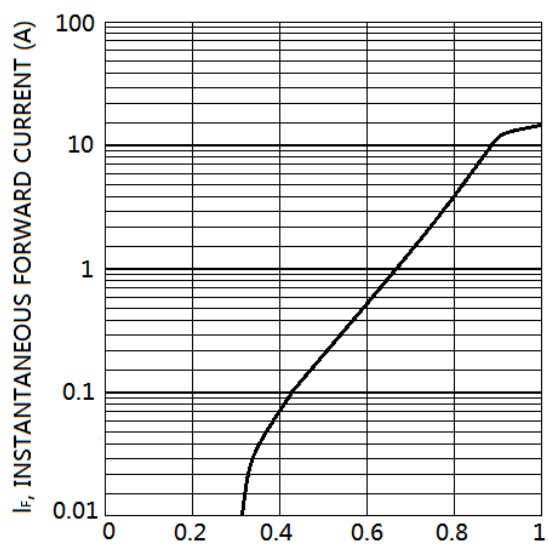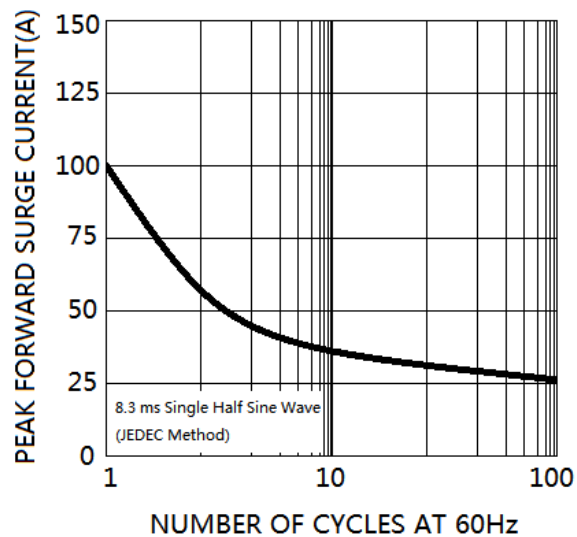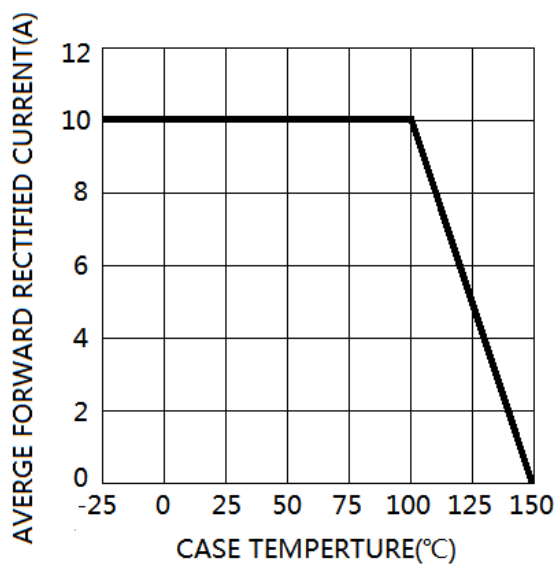

/ Package Dimensions

T0-220

单位: mm

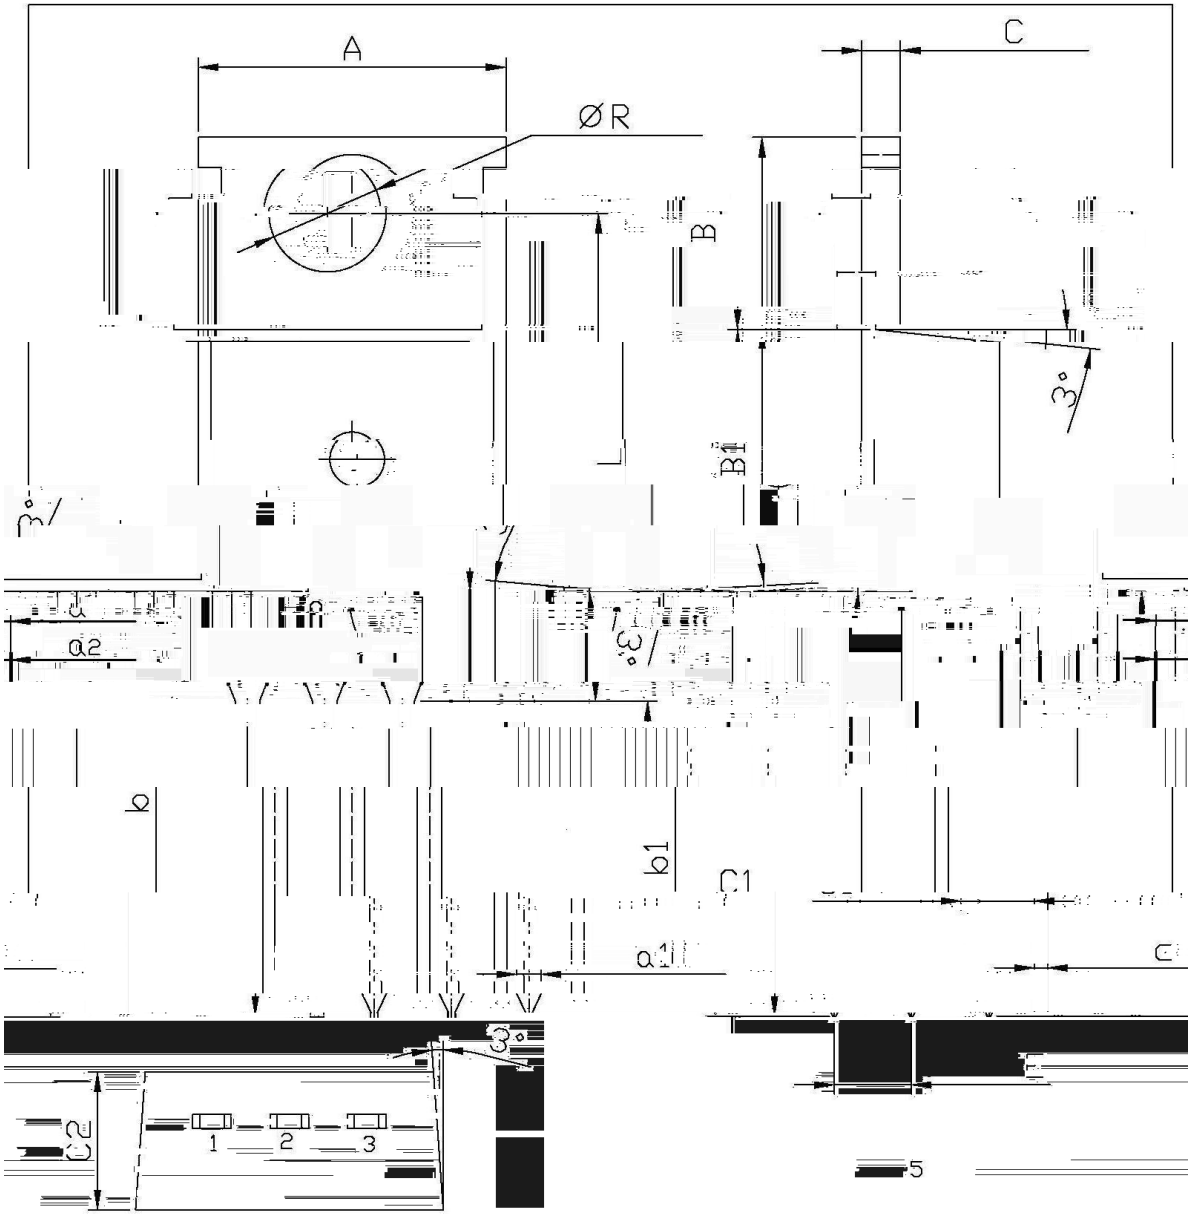


Dimensions In Millimeters				Dimensions In Millimeters			
Symbol	Min	Max	Symbol	Min	Max	Symbol	Min
A	9.8	11.4	C	10.2	11.2	B	6.3
R	3.56	3.64	B1	9.0	10.0	C1	2.5
a1	12.6	13.6					
b1	15.7	16.1					
a2	9.4	10.4					
b2	2.6	3.6					

/ Marking Instructions



() / Temperature Profile for Dip Soldering(Pb-Free)

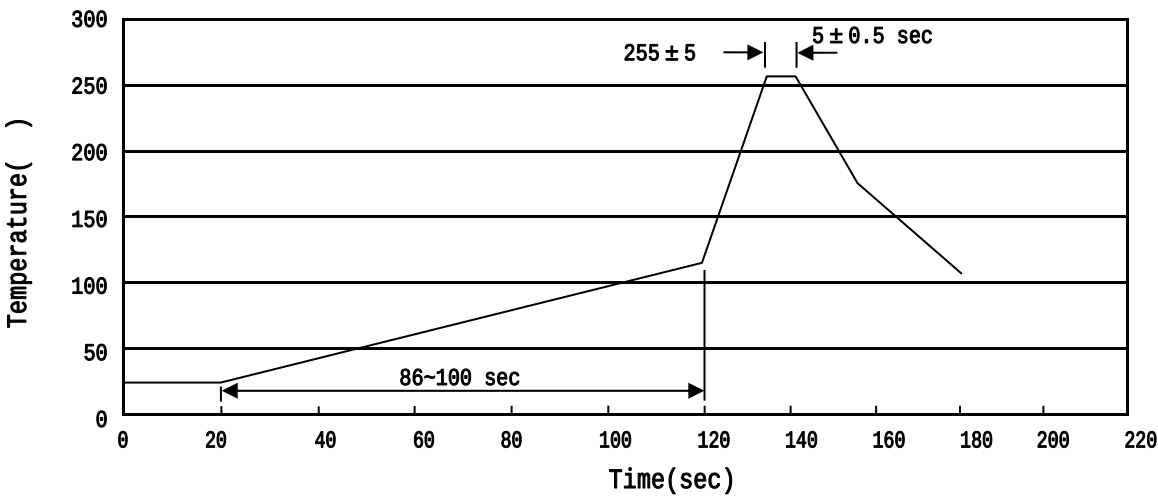

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices