


MBR1045CT

TO-220



/ h_{FE} Classifications & Marking





/ Absolute Maximum Ratings(Ta=25)

	θ		
		~	

/ Electrical Characteristics(Ta=25)

						μ

/ Electrical Characteristic Curve

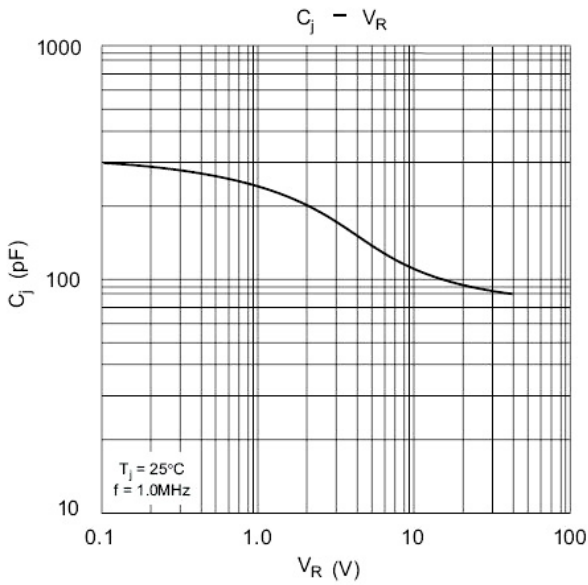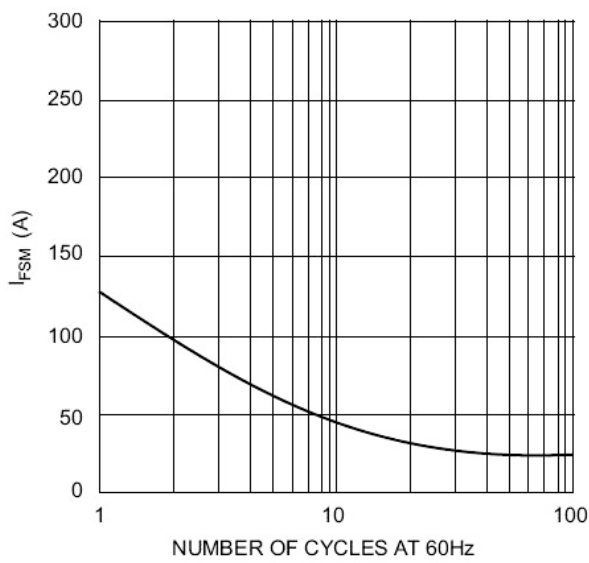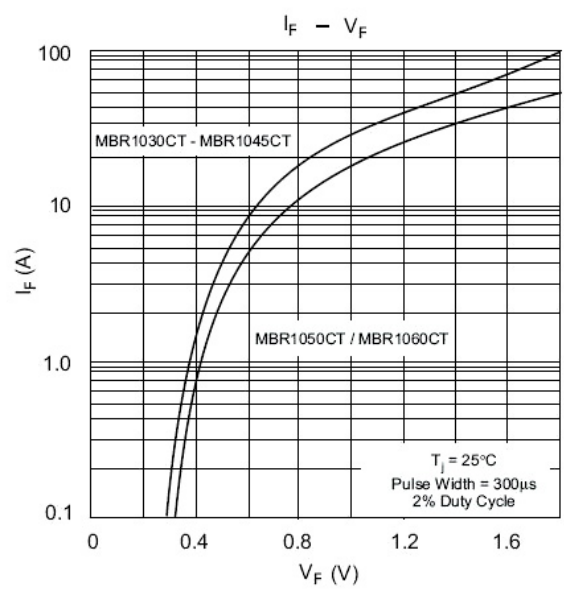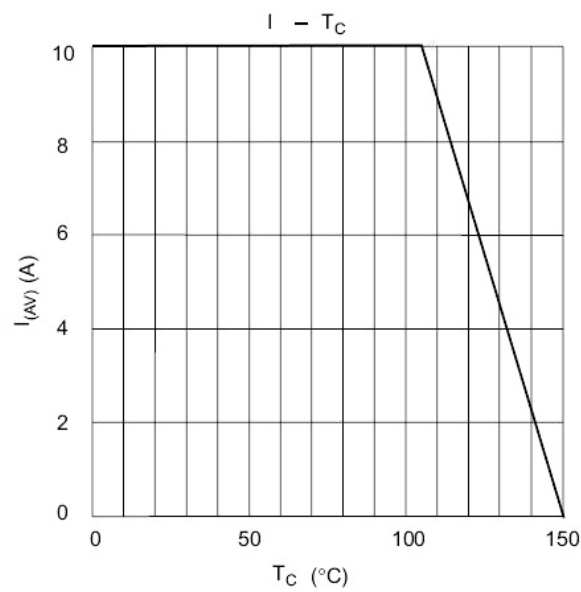


/ Package Dimensions


单位: mm

TO-220

E

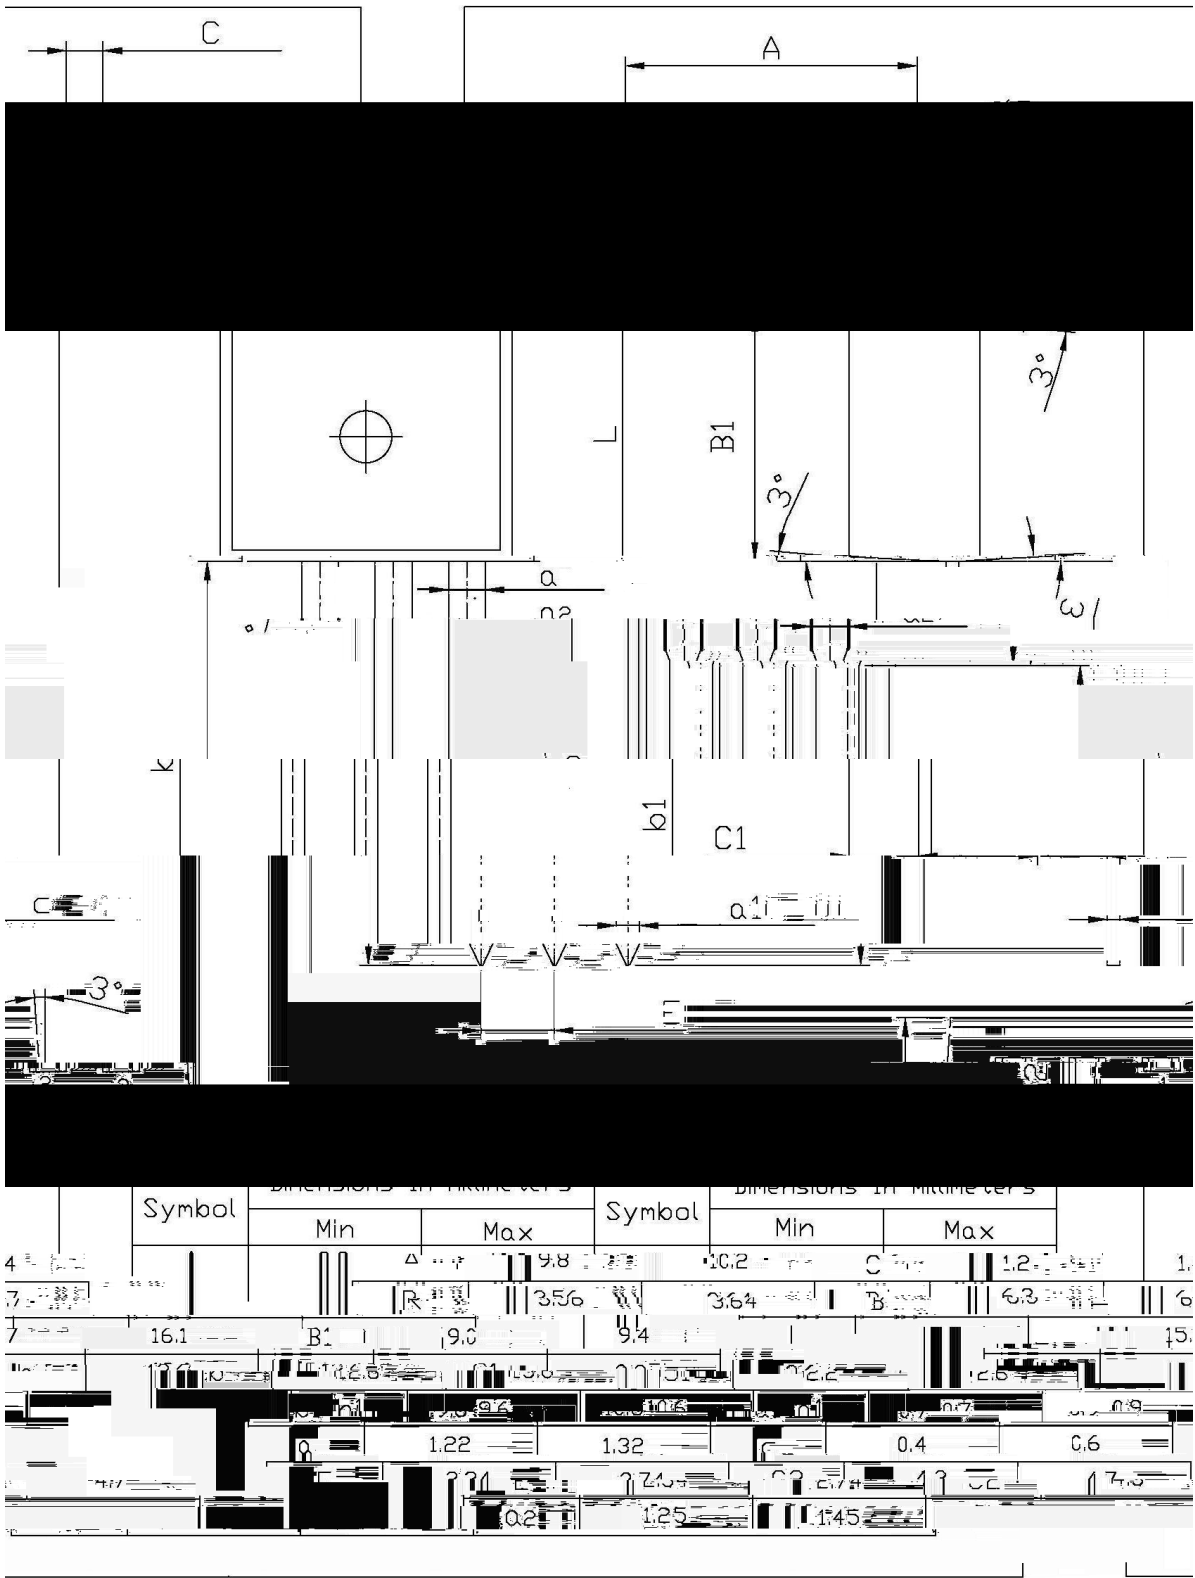

/ Marking Instructions

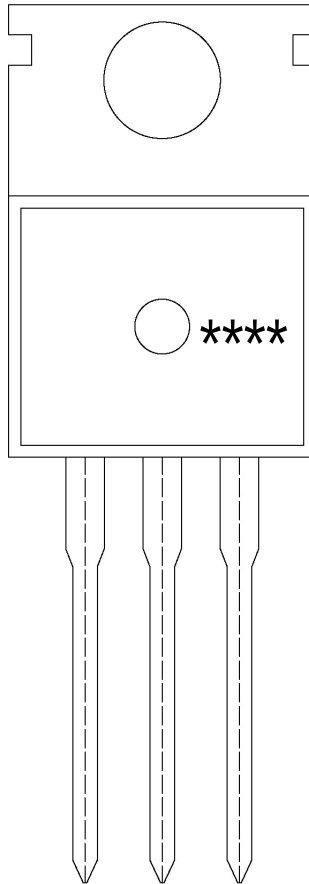


BR

MBR1045

CT:

() / Temperature Profile for Dip Soldering(Pb-Free)

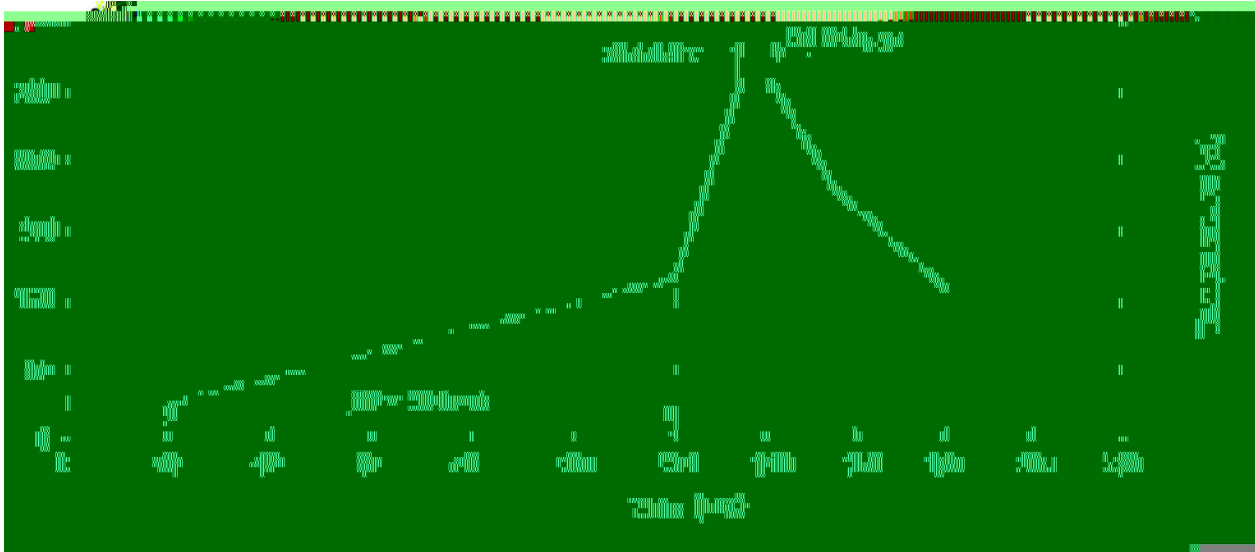

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

封装形式

包装数量

包装尺寸

: