


## / Descriptions

WR0595


## / Features

## / Applications

## / Equivalent Circuit



## / Pinning



## / $h_{FE}$ Classifications & Marking






/ Absolute Maximum Ratings(Ta=25 )

|  |          |   |  |
|--|----------|---|--|
|  |          |   |  |
|  |          |   |  |
|  |          |   |  |
|  |          |   |  |
|  |          |   |  |
|  |          |   |  |
|  | $\theta$ |   |  |
|  |          | ~ |  |

/ Electrical Characteristics(Ta=25 )


|  |  |                    |  |  |  |       |
|--|--|--------------------|--|--|--|-------|
|  |  |                    |  |  |  |       |
|  |  |                    |  |  |  |       |
|  |  | $^{\circ}\text{C}$ |  |  |  |       |
|  |  | $^{\circ}\text{C}$ |  |  |  |       |
|  |  | $^{\circ}\text{C}$ |  |  |  |       |
|  |  | $^{\circ}\text{C}$ |  |  |  |       |
|  |  |                    |  |  |  | $\mu$ |

/ Electrical Characteristic Curve

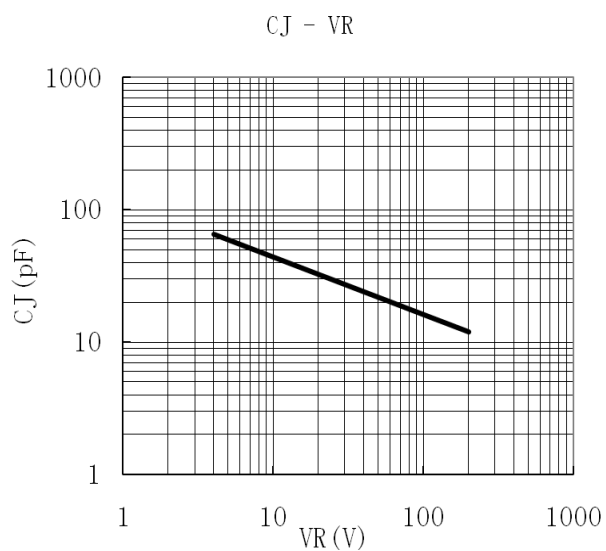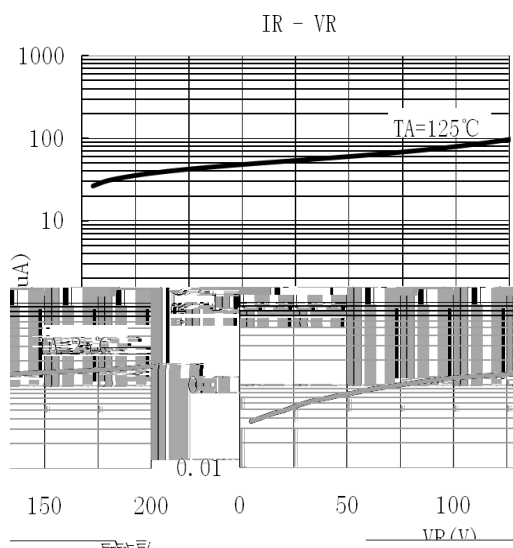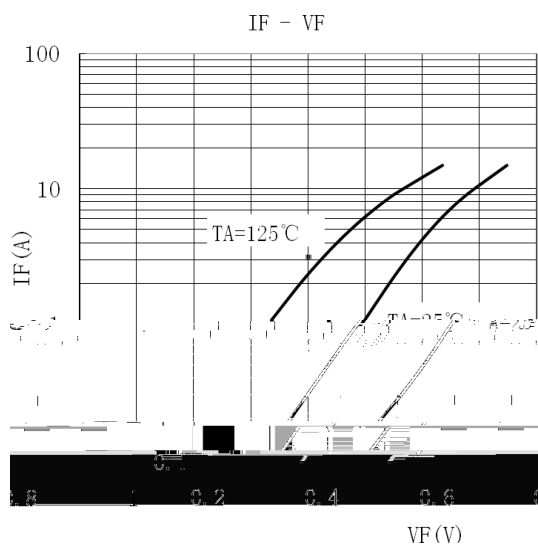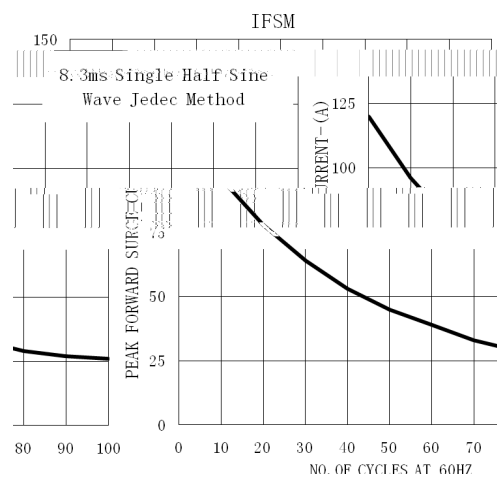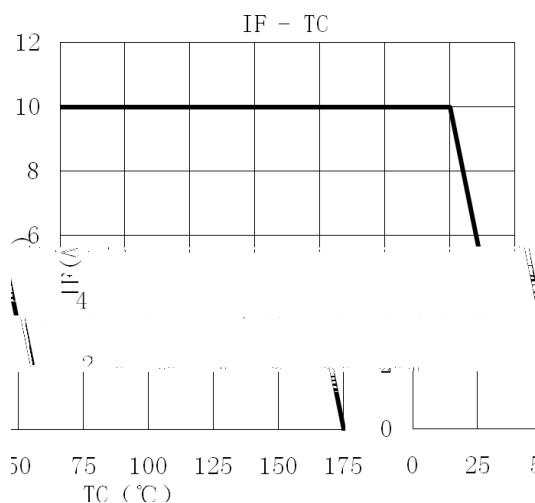



/ Marking Instructions

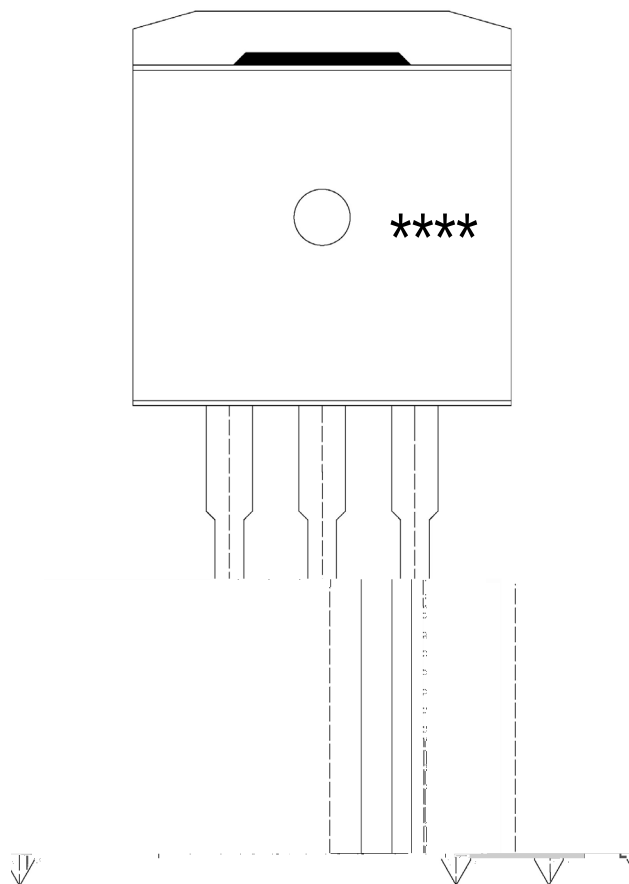


EU

P EUD43533

FW:

----

(     ) / Temperature Profile for Dip Soldering(Pb-Free)

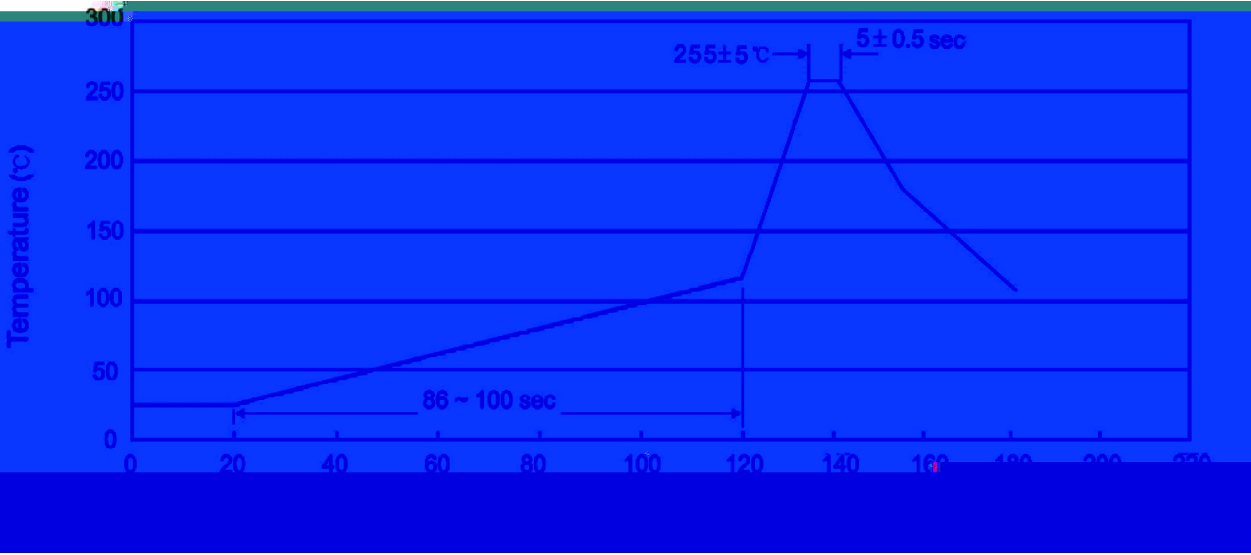

/ Resistance to Soldering Heat Test Conditions



/ Packaging SPEC.

| 封装形式 | 包装数量               |                         |                        |                              |                        | 包装尺寸    |             |             |
|------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---------|-------------|-------------|
|      | Units/Tube<br>只/套管 | Tubes/Inner Box<br>套管/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Tube 套管 | Inner Box 盒 | Outer Box 箱 |
|      |                    |                         |                        |                              |                        |         |             |             |

/ Notices