


/ Descriptions

TO-263

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

			℃
		~	℃

/ Electrical Characteristics(Ta=25)






		℃				
		℃				
		℃				
		℃				
	()	℃				
		℃				
		℃				

:


。

。

/ Electrical Characteristic Curve

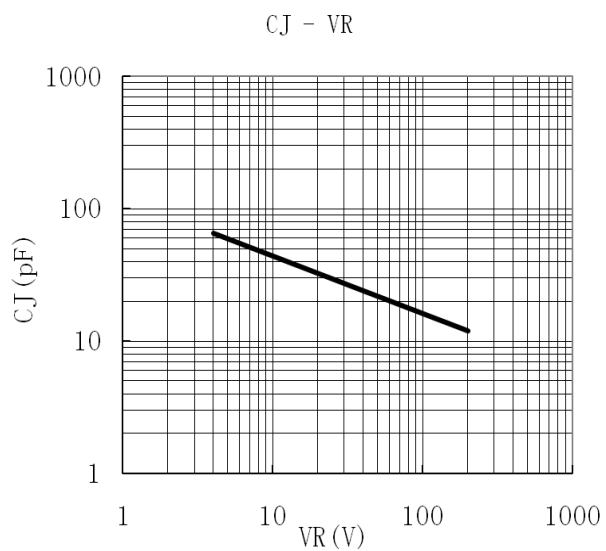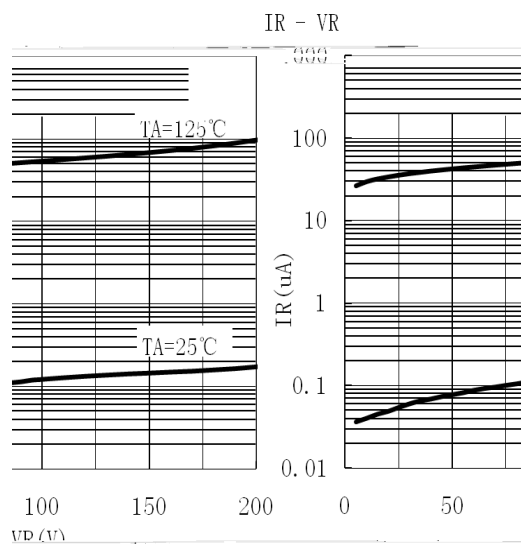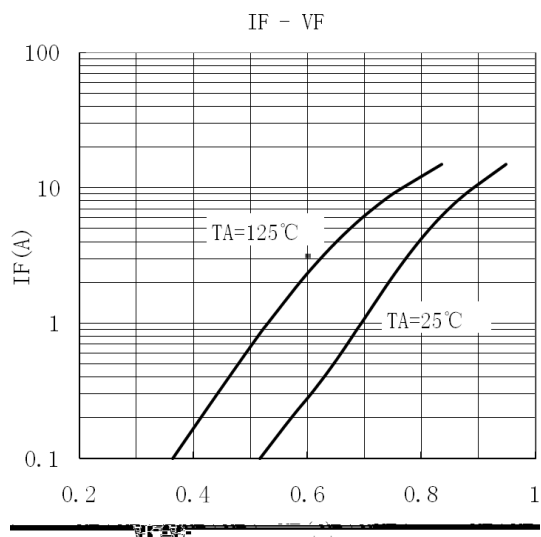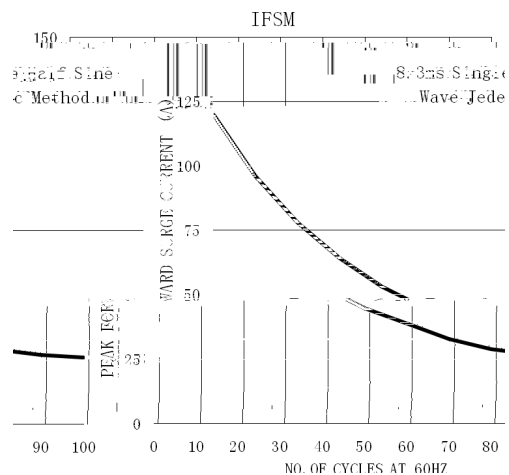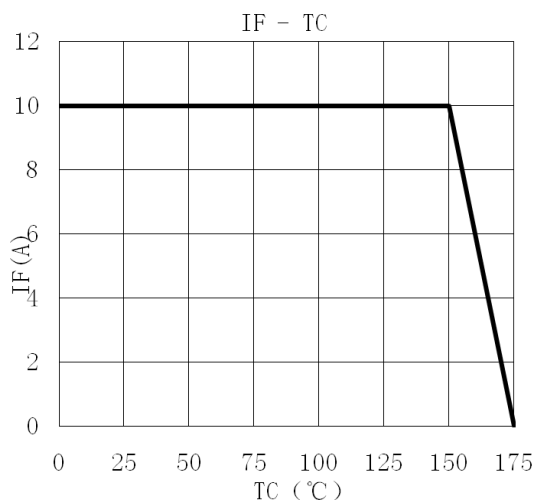

I Package Dimensions

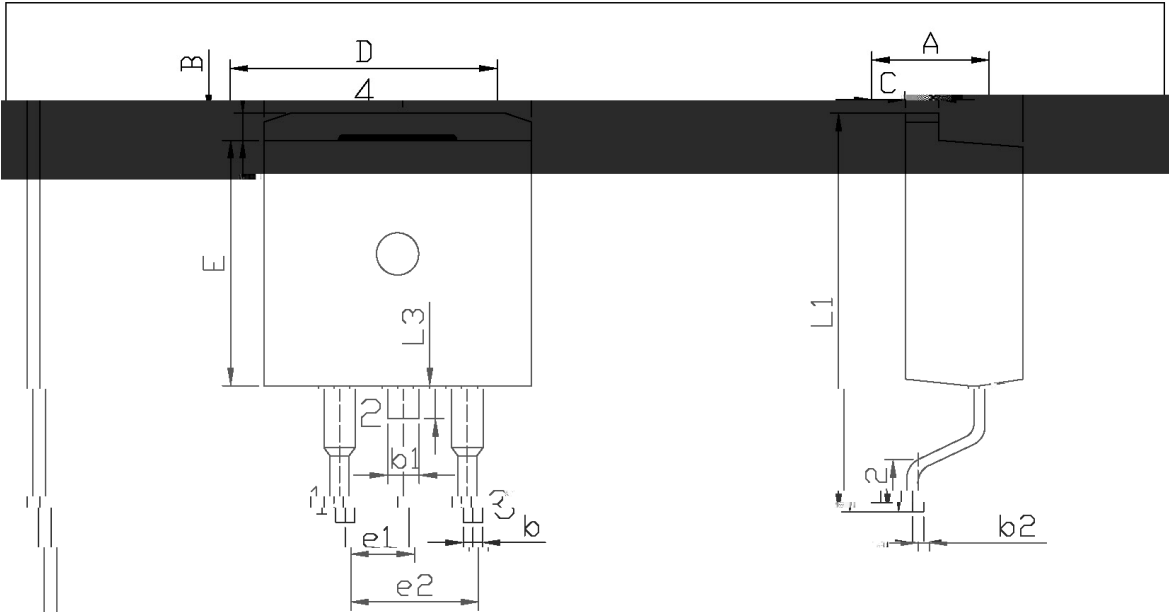


单位: mm

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	e1	2.34	2.74

Technical drawing of a component showing dimensions A, B, E, and e1. The drawing includes a top view and a side view. The top view shows a rectangular component with dimensions A and B. The side view shows the component's profile with dimensions E and e1. The drawing is a black and white line drawing with dimension lines and arrows indicating the measurement points.

/ Marking Instructions

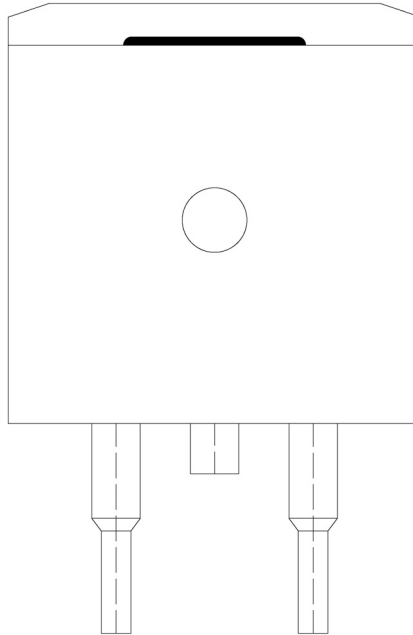


BR

MBRB10200

CT:

() / b n o o o f o f o b i i i a b f d o o

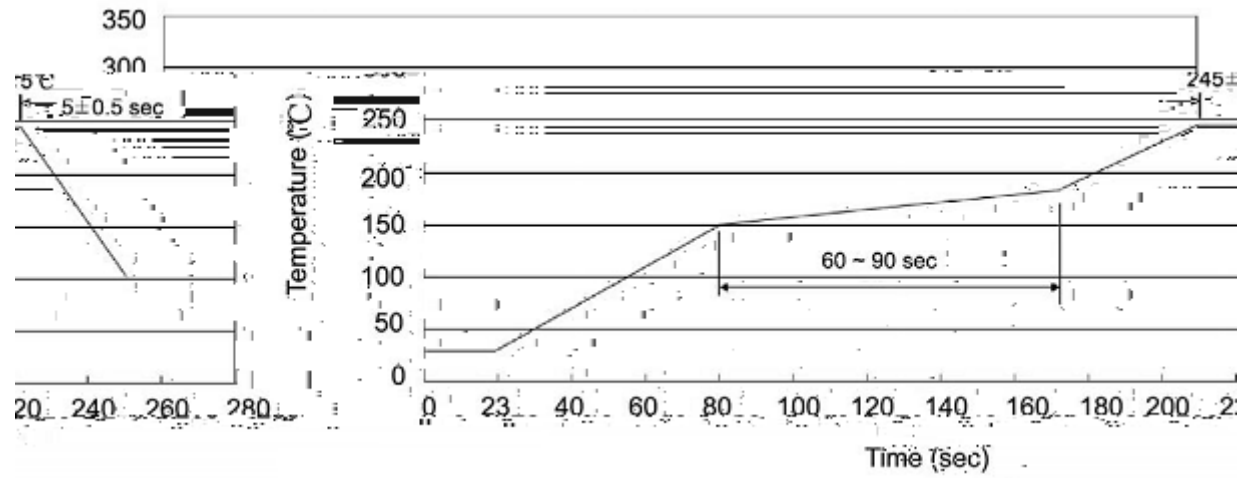

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices