


描述 / Descriptions

特征 / Features



$Y_{I+W}|s,@3165Y/$

用途 / Applications

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning

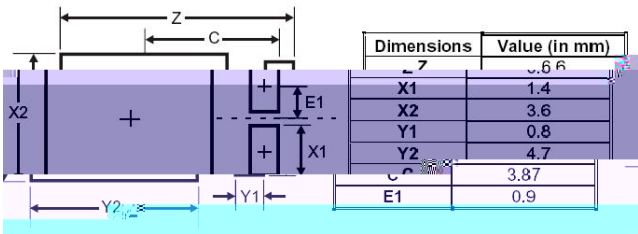

放大及印章代码 / h_{FE} Classifications & Marking

极限参数 / Absolute Maximum Ratings(Ta=25℃)

	θ		





电性能参数 / Electrical Characteristics(Ta=25℃)

2


41 IU07 SFE 5

51


电参数曲线图 / Electrical Characteristic Curve

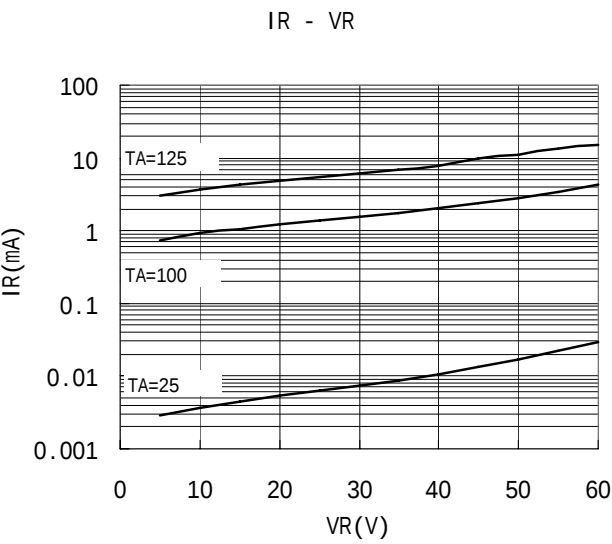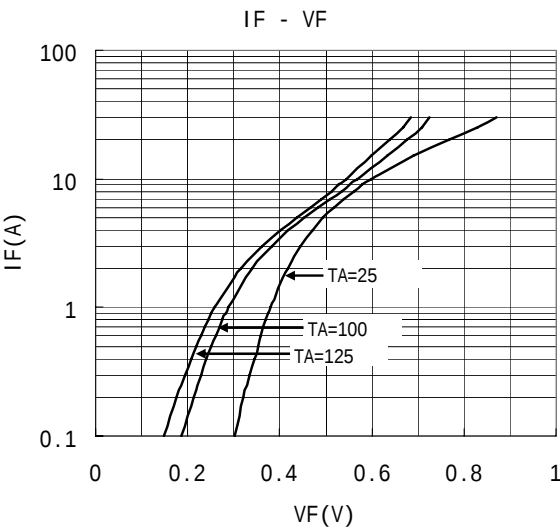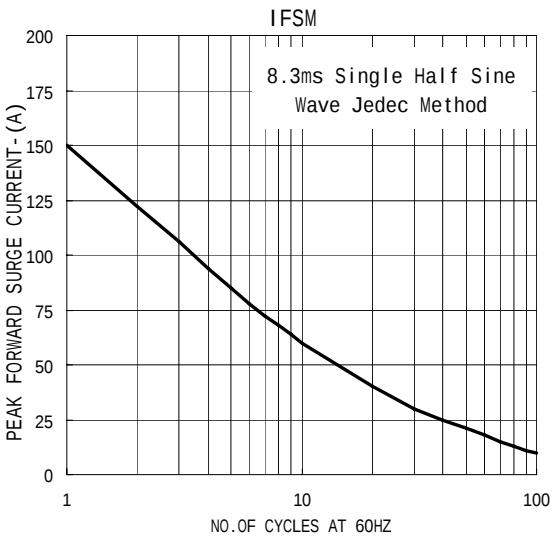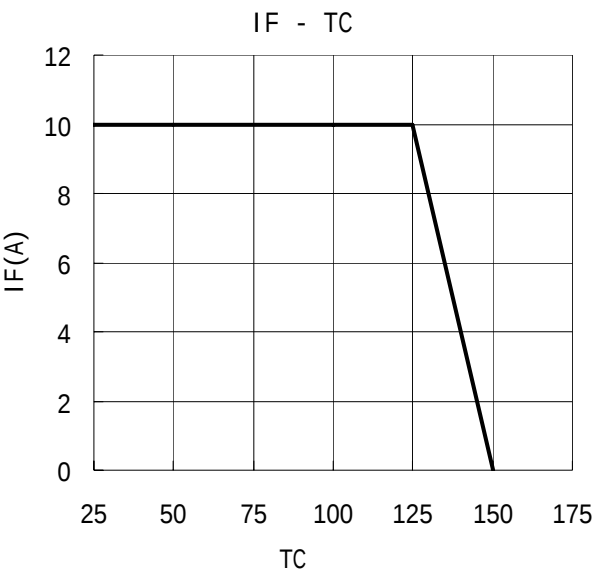

外形尺寸图 / Package Dimensions

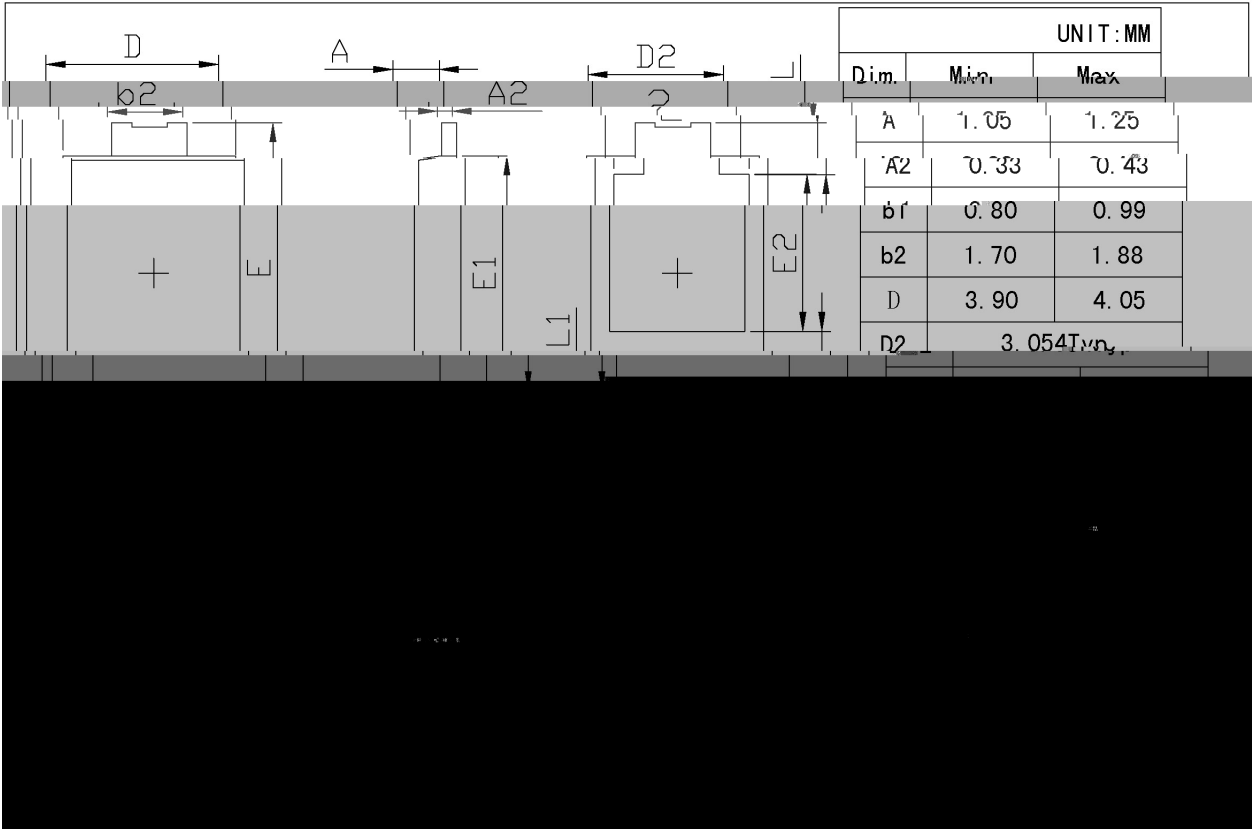


印章说明 / Marking Instructions

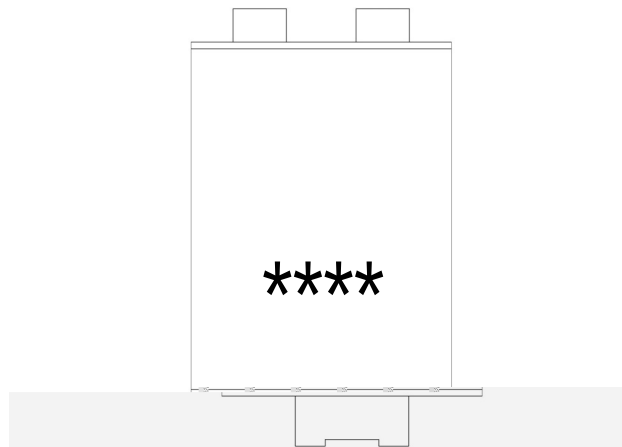

P EUH4393

P EUH4393

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

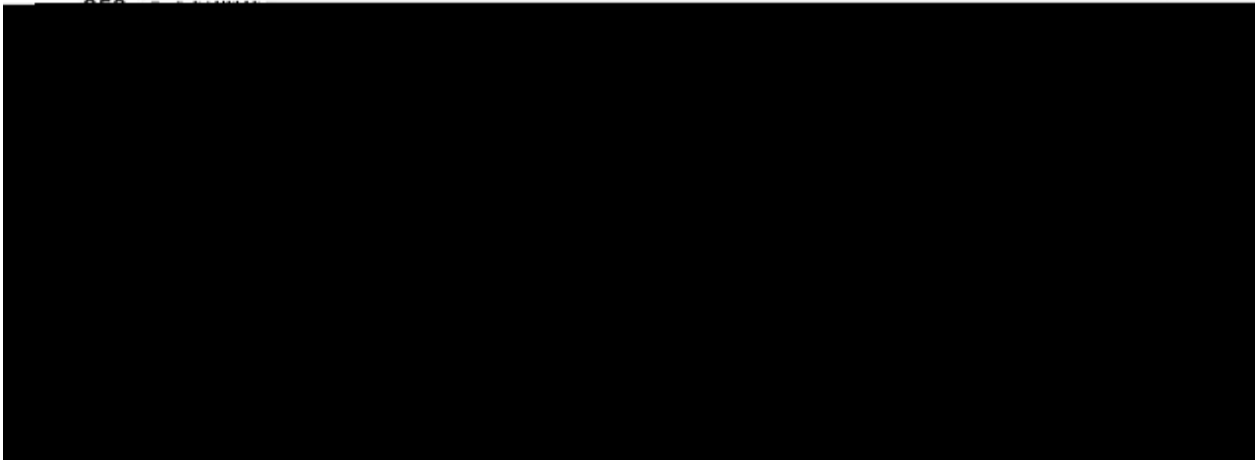

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions



包装规格 / Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-277	5,000	3	15,000	6	90,000	13 ×12	360×360×50	380×335×366

使用说明 / Notices