


Silicon NPN transistor in a SOT-23 Plastic Package.

Low noise, high gain.


High frequency amplifier applications.



PIN 1 Base PIN 2 Emitter PIN 3 Collector


h_{FE} Range	30 300
Marking	HR2P


Rev.FApr.-2017

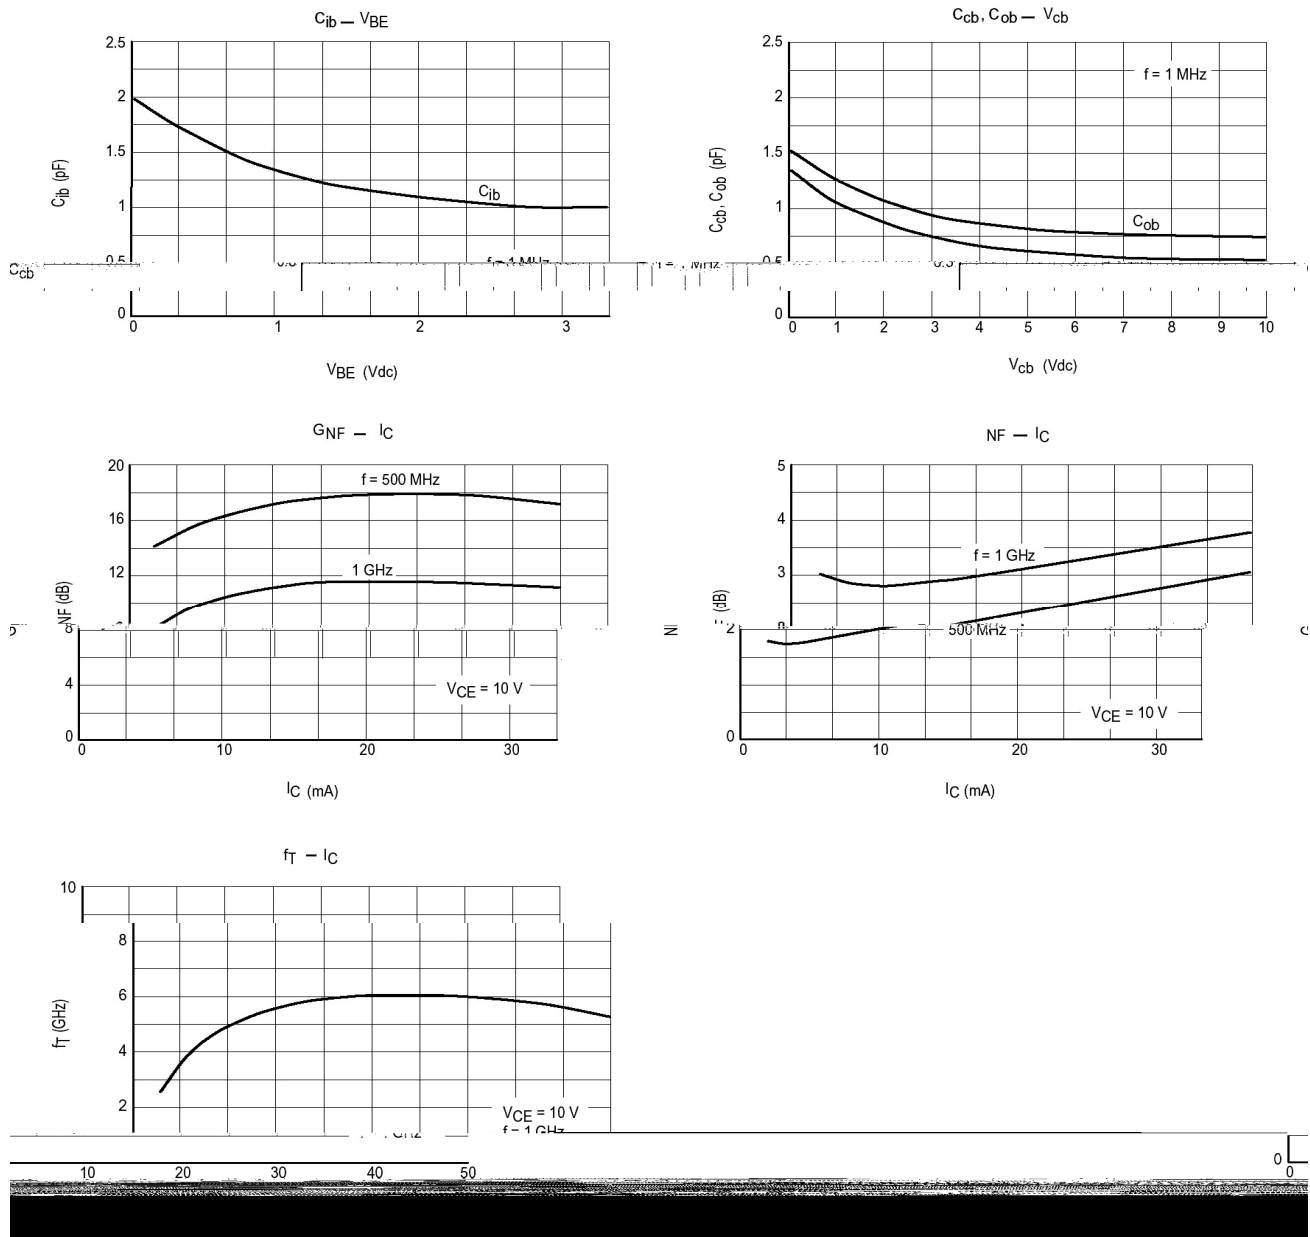

SOT-23

单位: mm

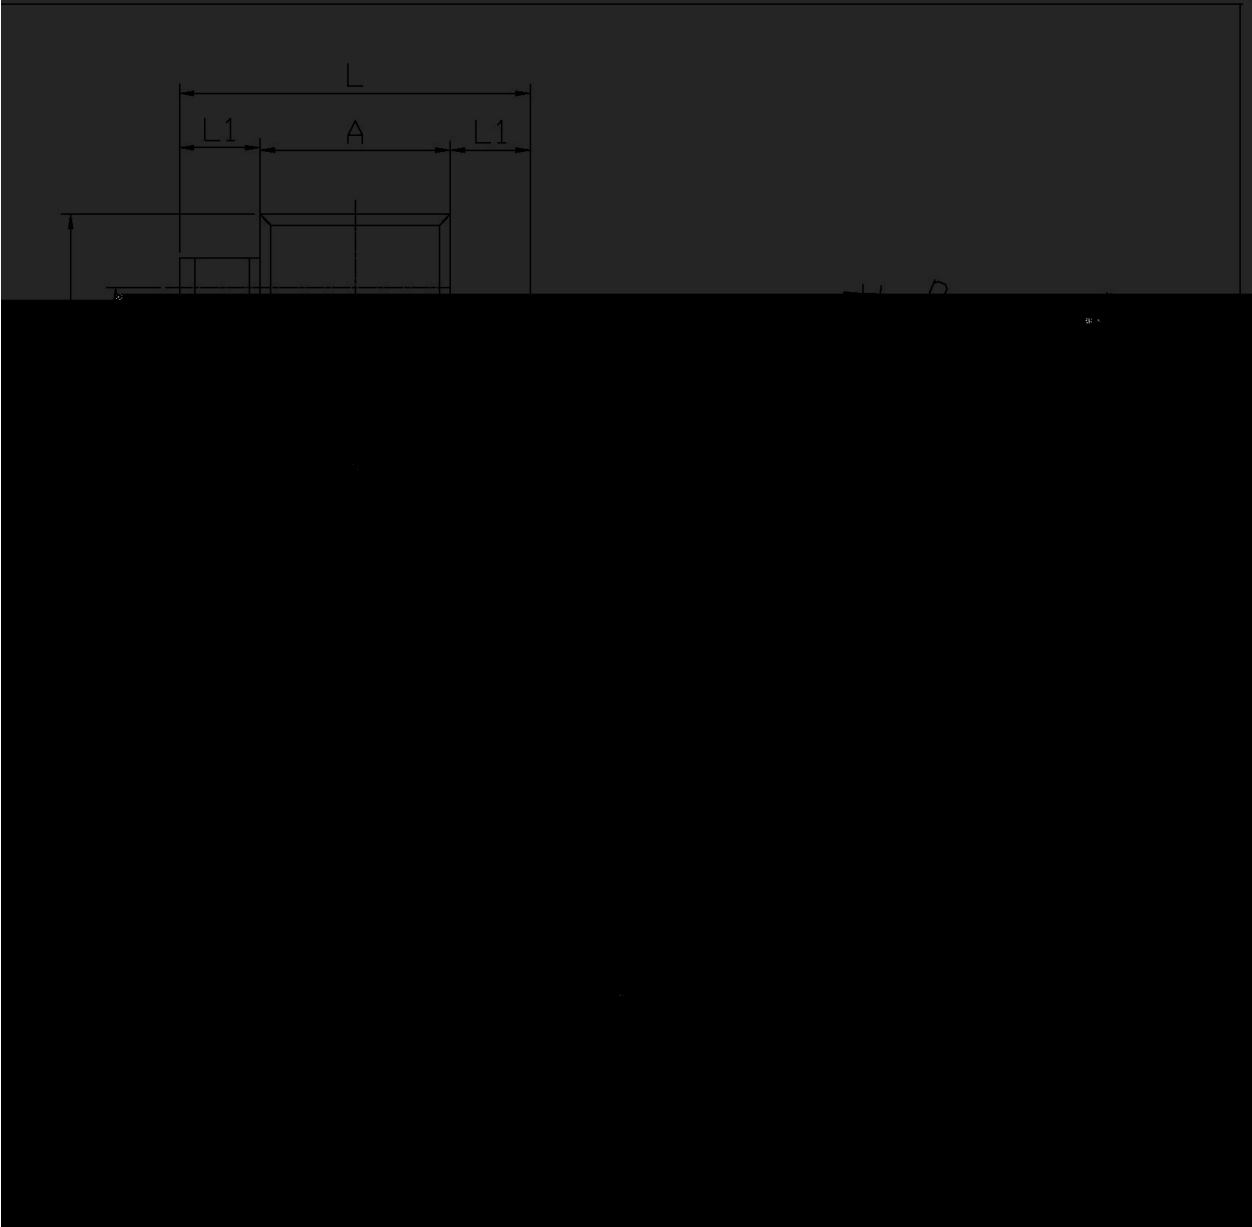

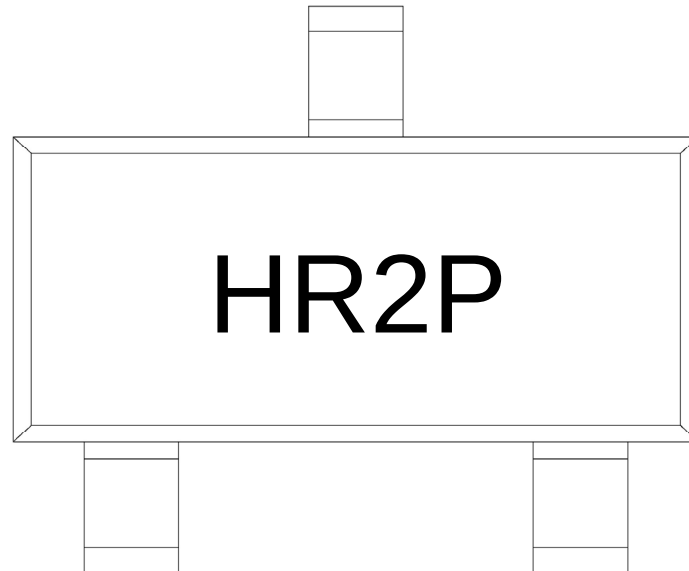


R2P

Note:

Company Code

R2P

Product Type

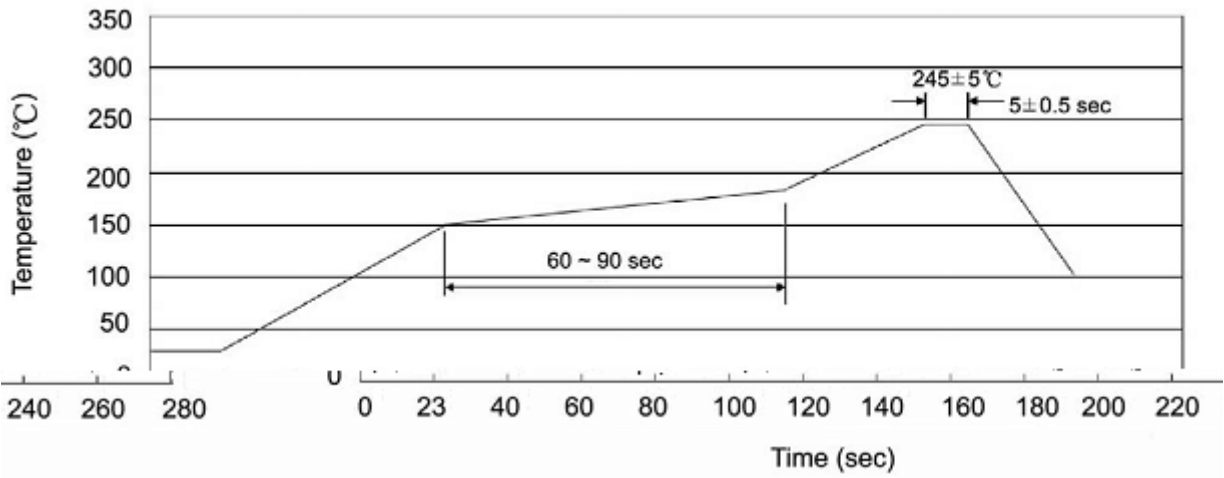

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260 5

10 1 sec.

Temp.:260±5℃

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱