




修订记录 / Revised record

Silicon PNP transistor in a SOT-23 Plastic Package.

h_{FE} $V_{CE(sat)}$

High DC Current Gain, Low Collector to Emitter Saturation Voltage. HF product.

General purpose amplifier and switching.



PIN 1 Base PIN 2 Emitter PIN 3 Collector

放大及印章代码 / h_{FE} Classifications & Mark 0

极限参数 / Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-40	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current	I_C	-200	mA
Collector Power Dissipation	P_C	300	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C


电性能参数 / Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C = -10\mu A$ $I_E = 0$	-40			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C = -1.0mA$ $I_B = 0$	-40			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E = -10\mu A$ $I_C = 0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = -30V$ $I_E = 0$			-0.05	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB} = -3.0V$ $I_C = 0$			-0.05	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = -1.0V$ $I_C = -10mA$	100		300	
	$h_{FE(2)}$	$V_{CE} = -1.0V$ $I_C = -100mA$	30			
	$h_{FE(3)}$	$V_{CE} = -1.0V$ $I_C = -50mA$	60			
	$h_{FE(4)}$	$V_{CE} = -1.0V$ $I_C = -1.0mA$	80			
	$h_{FE(5)}$	$V_{CE} = -1.0V$ $I_C = -0.1mA$	60			
Collector-Emitter Saturation Voltage	$V_{CE(sat) (1)}$	$I_C = -10mA$ $I_B = -1.0mA$			-0.25	V
	$V_{CE(sat) (2)}$	$I_C = -50mA$ $I_B = -5.0mA$			-0.4	V
Base-Emitter Saturation Voltage	$V_{BE(sat) (1)}$	$I_C = -10mA$ $I_B = -1.0mA$	-0.65		-0.85	V
	$V_{BE(sat) (2)}$	$I_C = -50mA$ $I_B = -5.0mA$			-0.95	V

电性能参数 / Electrical Characteristics(Ta=25°C)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Transition Frequency	f_T	$V_{CE}=-20V$ $I_C=-10mA$ $f=100MHz$	250			MHz
Output Capacitance	C_{ob}	$V_{CB}=-5.0V$ $f=1.0MHz$			4.5	pF
Storage Time	t_{stg}	$V_{CC}=-3.0V$ $I_C=-10mA$ $I_{B1}=-I_{B2}=-1.0mA$			225	ns
Fall Time	t_f	$V_{CC}=-3.0V$ $I_C=-10mA$ $I_{B1}=-I_{B2}=-1.0mA$			75	ns
Delay Time	t_d	$V_{CC}=-3.0V$ $V_{BE}=-0.5V$ $I_C=-10mA$ $I_{B1}=-1.0mA$			35	ns
Rise Time	t_r	$V_{CC}=-3.0V$ $V_{BE}=-0.5V$ $I_C=-10mA$ $I_{B1}=-1.0mA$			35	ns
Input Capacitance	C_{ib}	$V_{EB}=-0.5V$ $f=1.0MHz$			10	pF


电参数曲线图 / Electrical Characteristic Curve

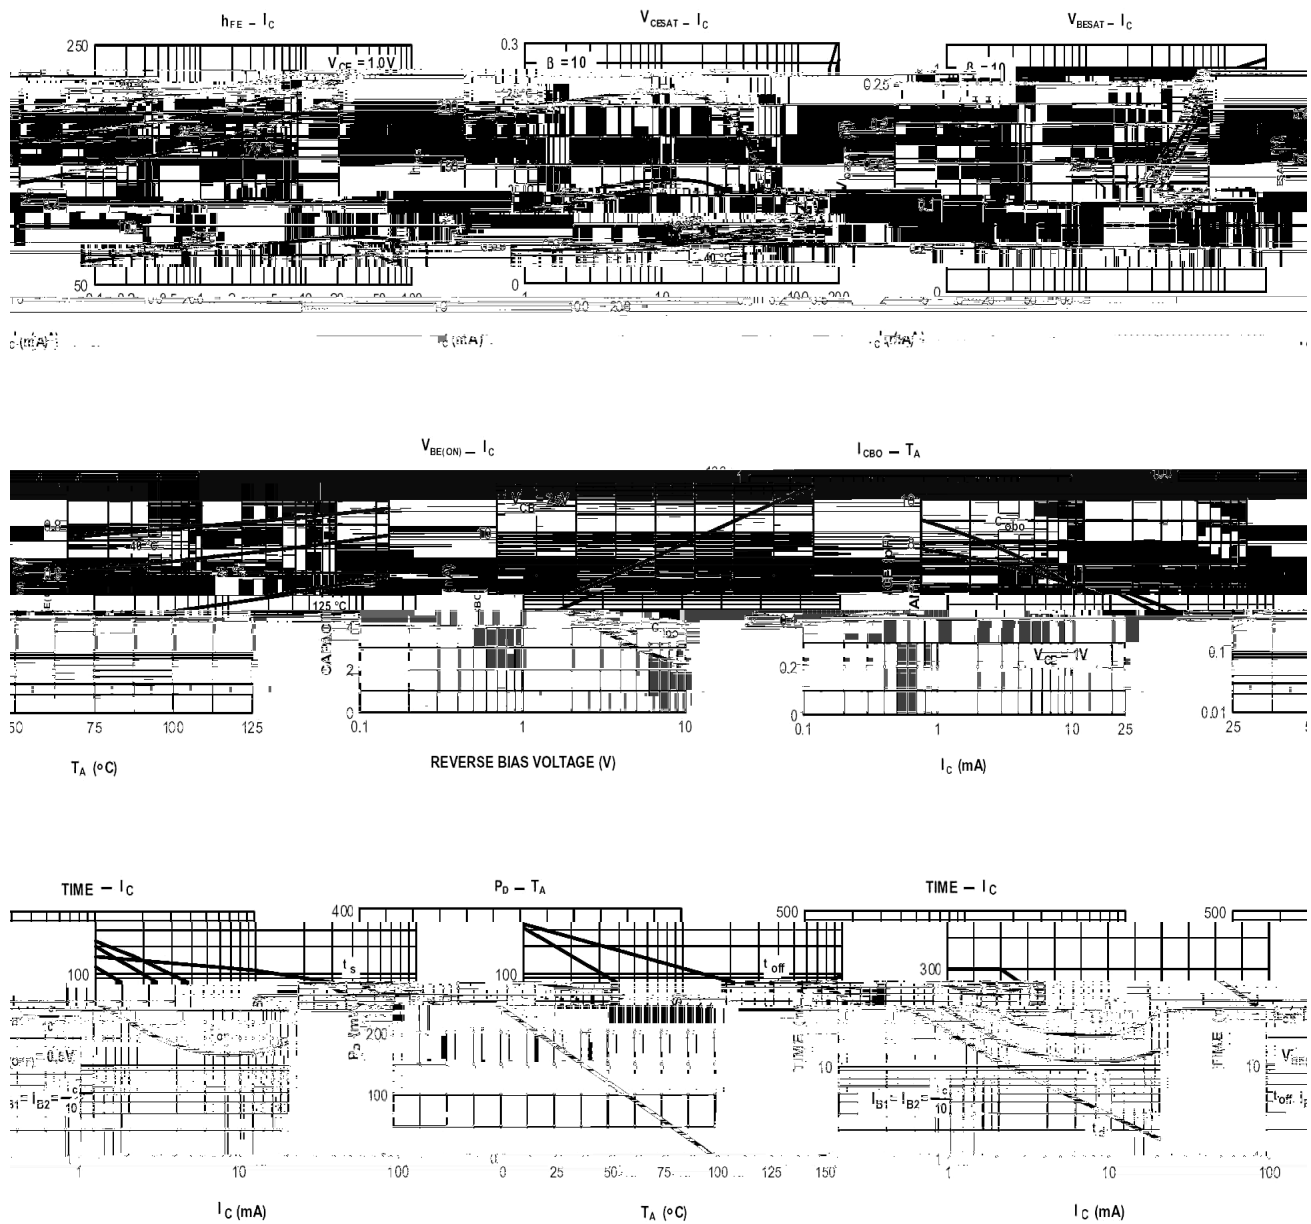

外形尺寸图 / Package Dimensions



印章说明 / Marking Instructions

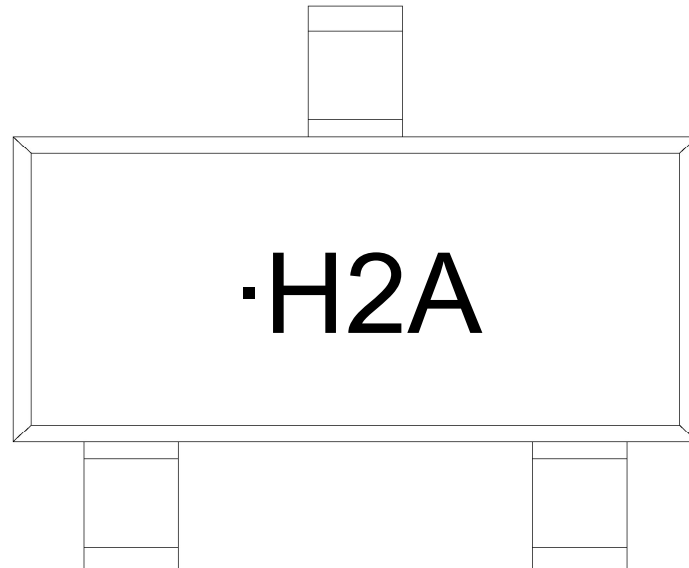

·

H

2A

Note:

·


Identify

H

Company Code

2A

Product Type Code

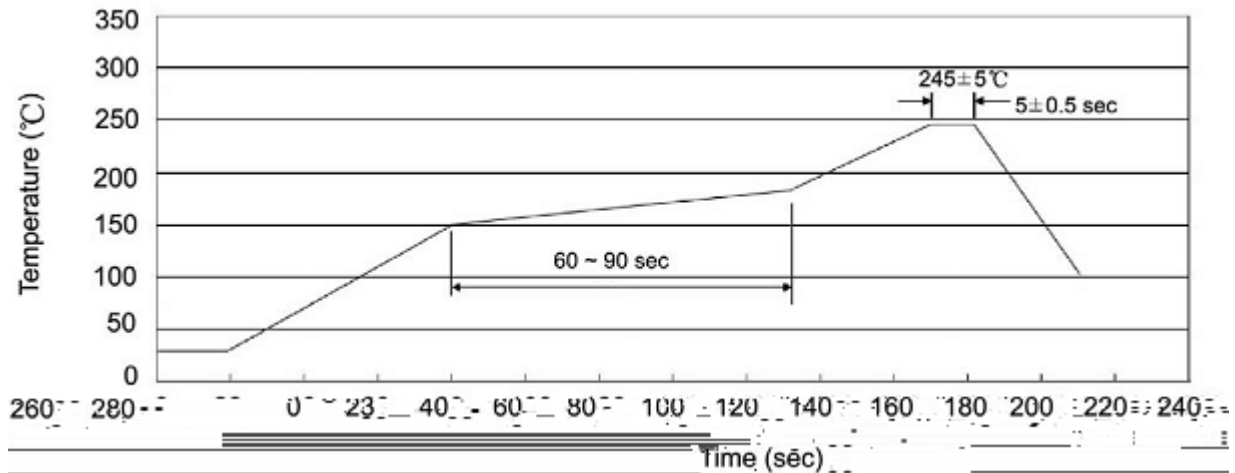回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)


Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5°C Time:10±1 sec

包装规格 / Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

使用说明 / Notices