

MMBT3906T

/ Descriptions


SOT-89 PNP

/ Features


h_{FE} $V_{CE(sat)}$

/ Applications


/ Equivalent Circuit



/ Pinning



/ Marking




/ Electrical Characteristics(Ta=25 –)

/ Electrical Characteristic Curve

/ Package Dimensions


SOT-89

单位: mm

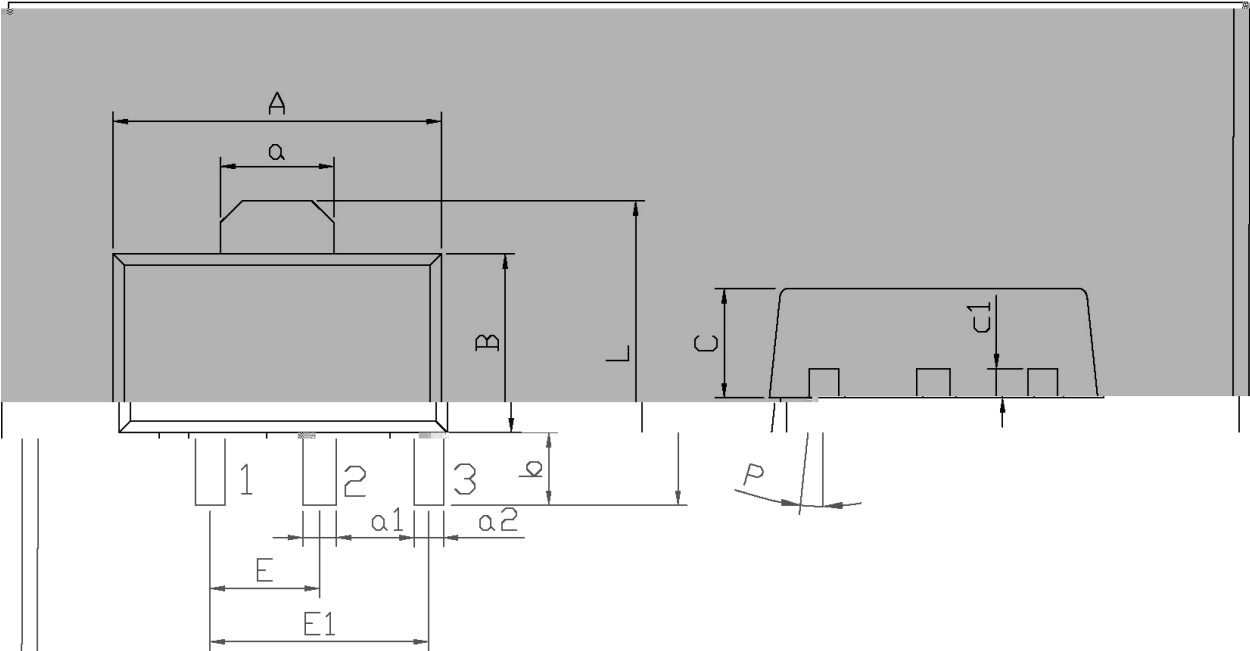

Symbol	Dimensions In. Millimeters		Symbol	Dimensions In. Millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.36	0.56
B	2.35	2.65	a2	0.30	0.50
L	3.878	4.478	C	1.40	1.70
a	1.45	1.65	c1	0.35	0.50
E	1.40	1.60	P	6°	
E1	2.80	3.20			
b	0.80	1.20			

/ Marking Instructions

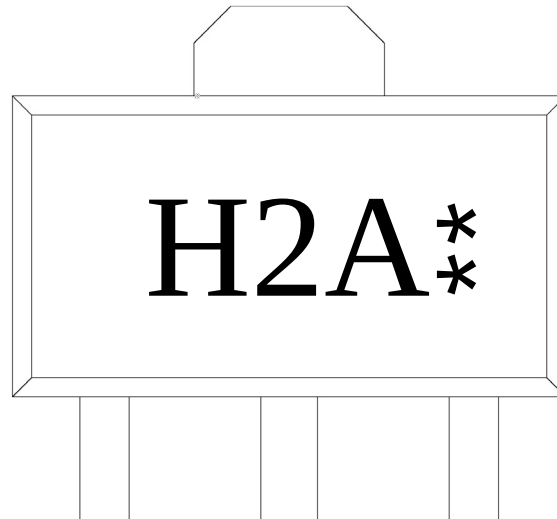


H

2A

**

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

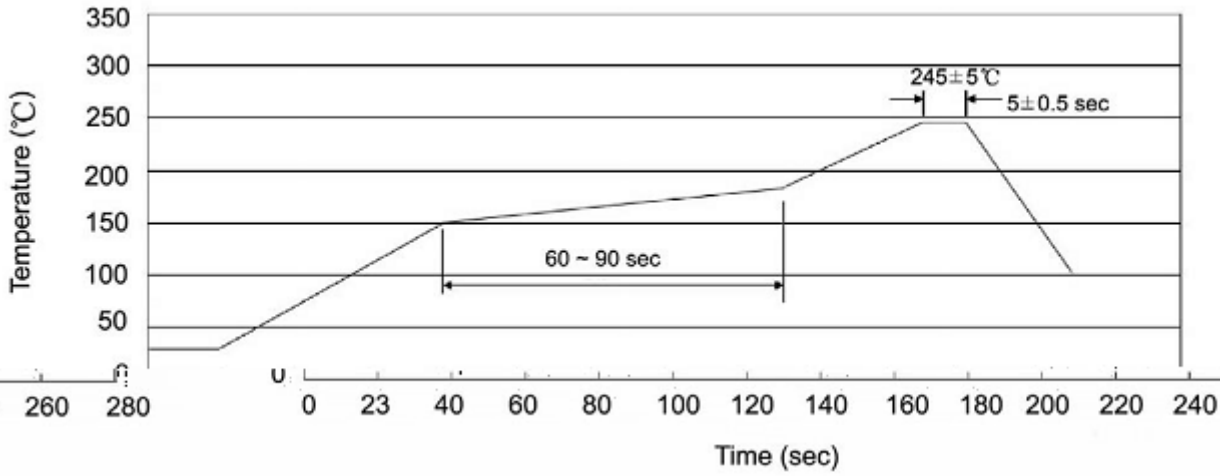

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices