


/ Descriptions

SOT-23 PNP


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking







/ Absolute Maximum Ratings(Ta=25)

-			

/ Electrical Characteristics(Ta=25)

						1
						1
-						1
-						
-						
-	-					


/ Electrical Characteristic Curve

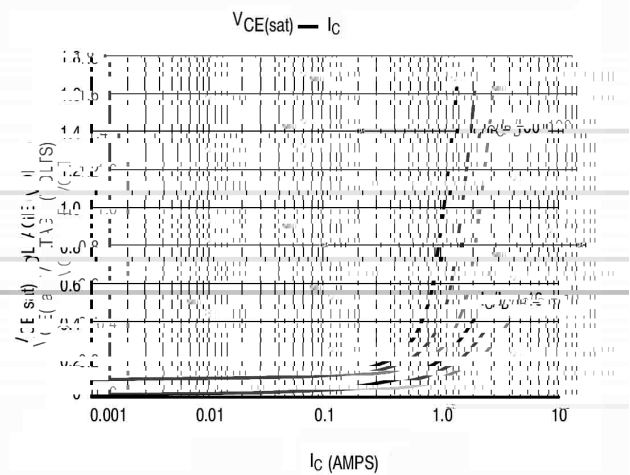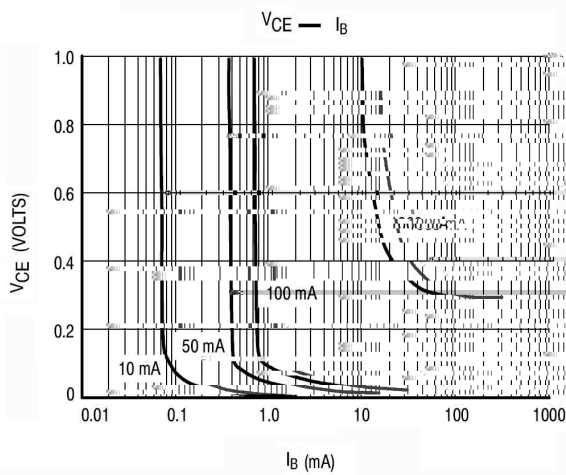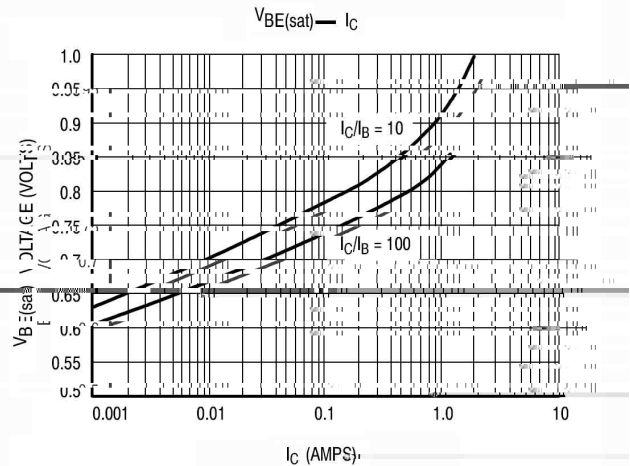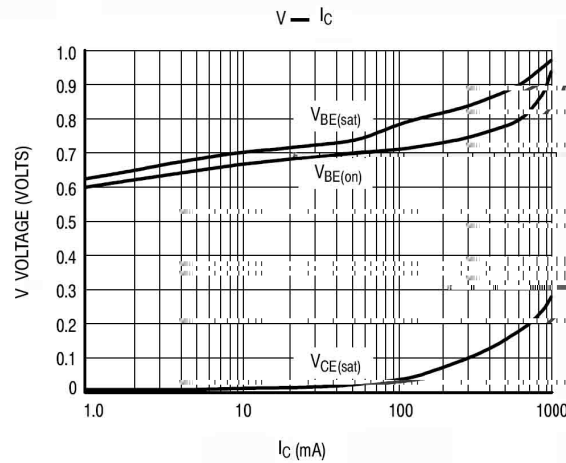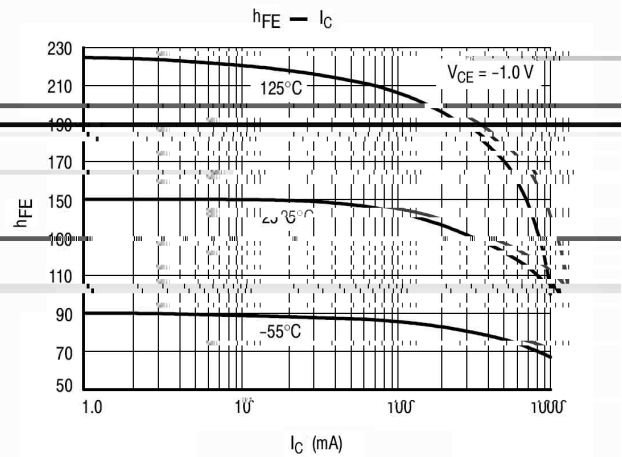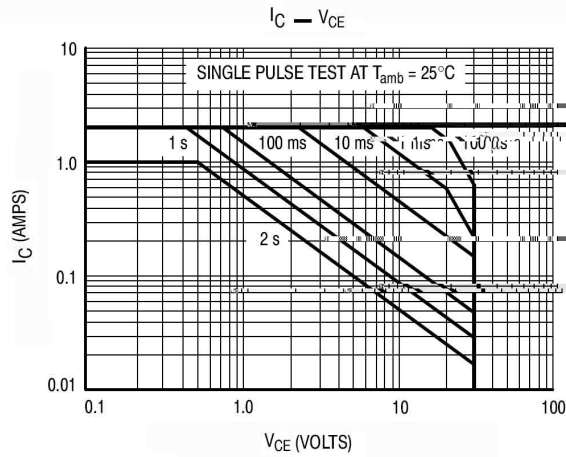

/ Package Dimensions


SOT-23

单位：mm

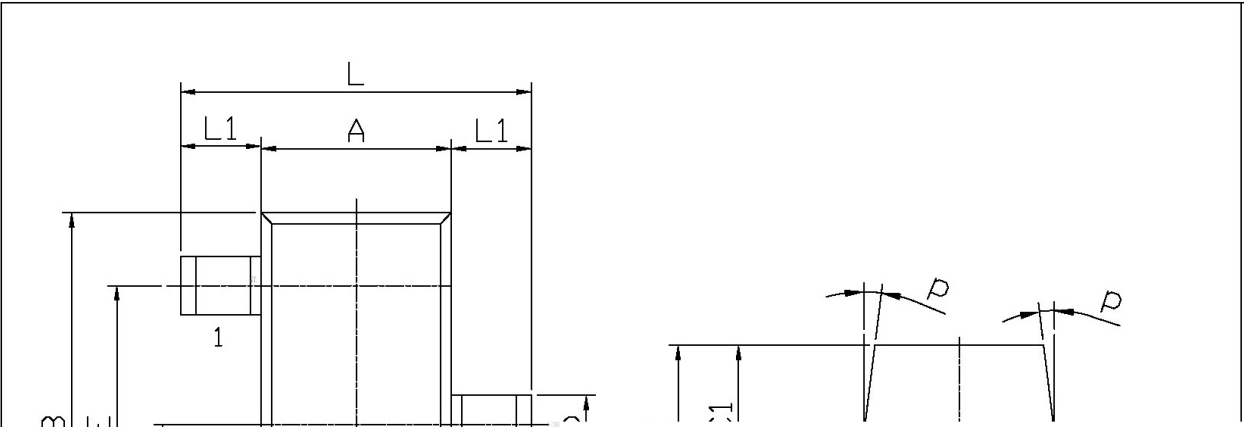

Symbol		Unit		Value	
Symbol	Value	Unit	Symbol	Value	Unit
L	2.2	mm	C	1.30Max	mm
L1	0.45	mm	C1	0.90	mm
A	1.15	mm	R	0.05	mm
B	2.70	mm	K	0	mm
E	1.70	mm	M	0.20MIN	mm
E1	0.85	mm	Q	7°	°
b	0.35	mm			


/ Marking Instructions

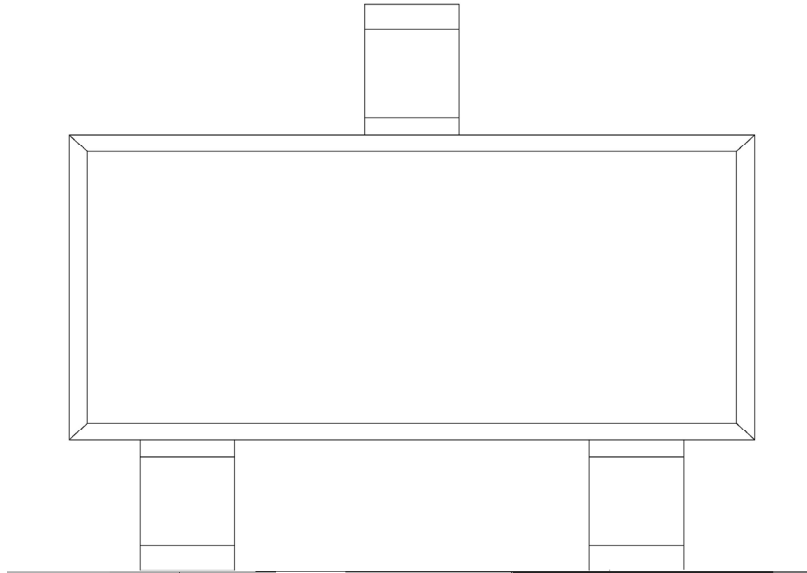

H
G3

H
G3

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

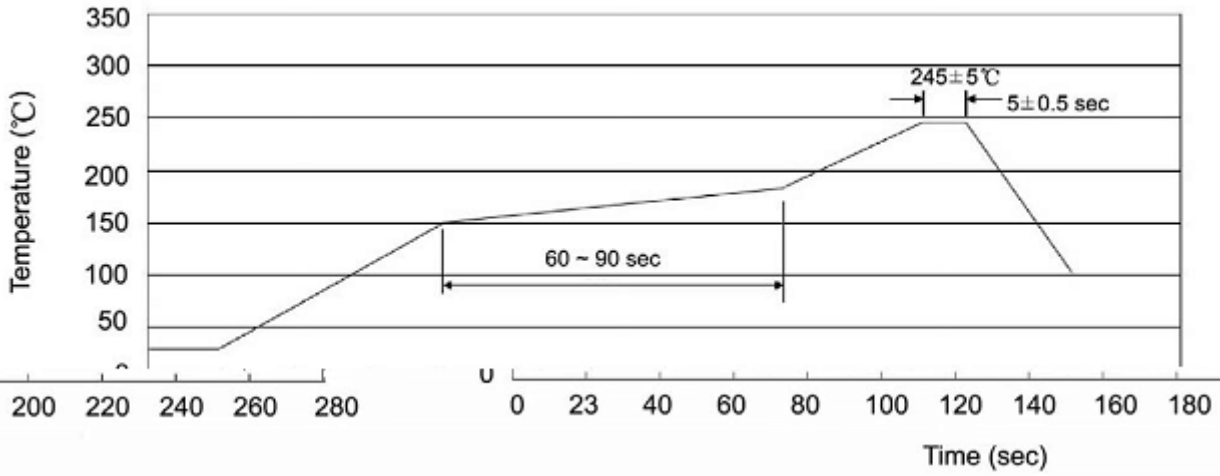

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices