


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/  $h_{FE}$  Classifications & Marking

|  |   |
|--|---|
|  | ~ |
|  |   |


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

|  |  |   |  |  |  |   |
|--|--|---|--|--|--|---|
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  | μ |

-

μ CB


## / Electrical Characteristic Curve

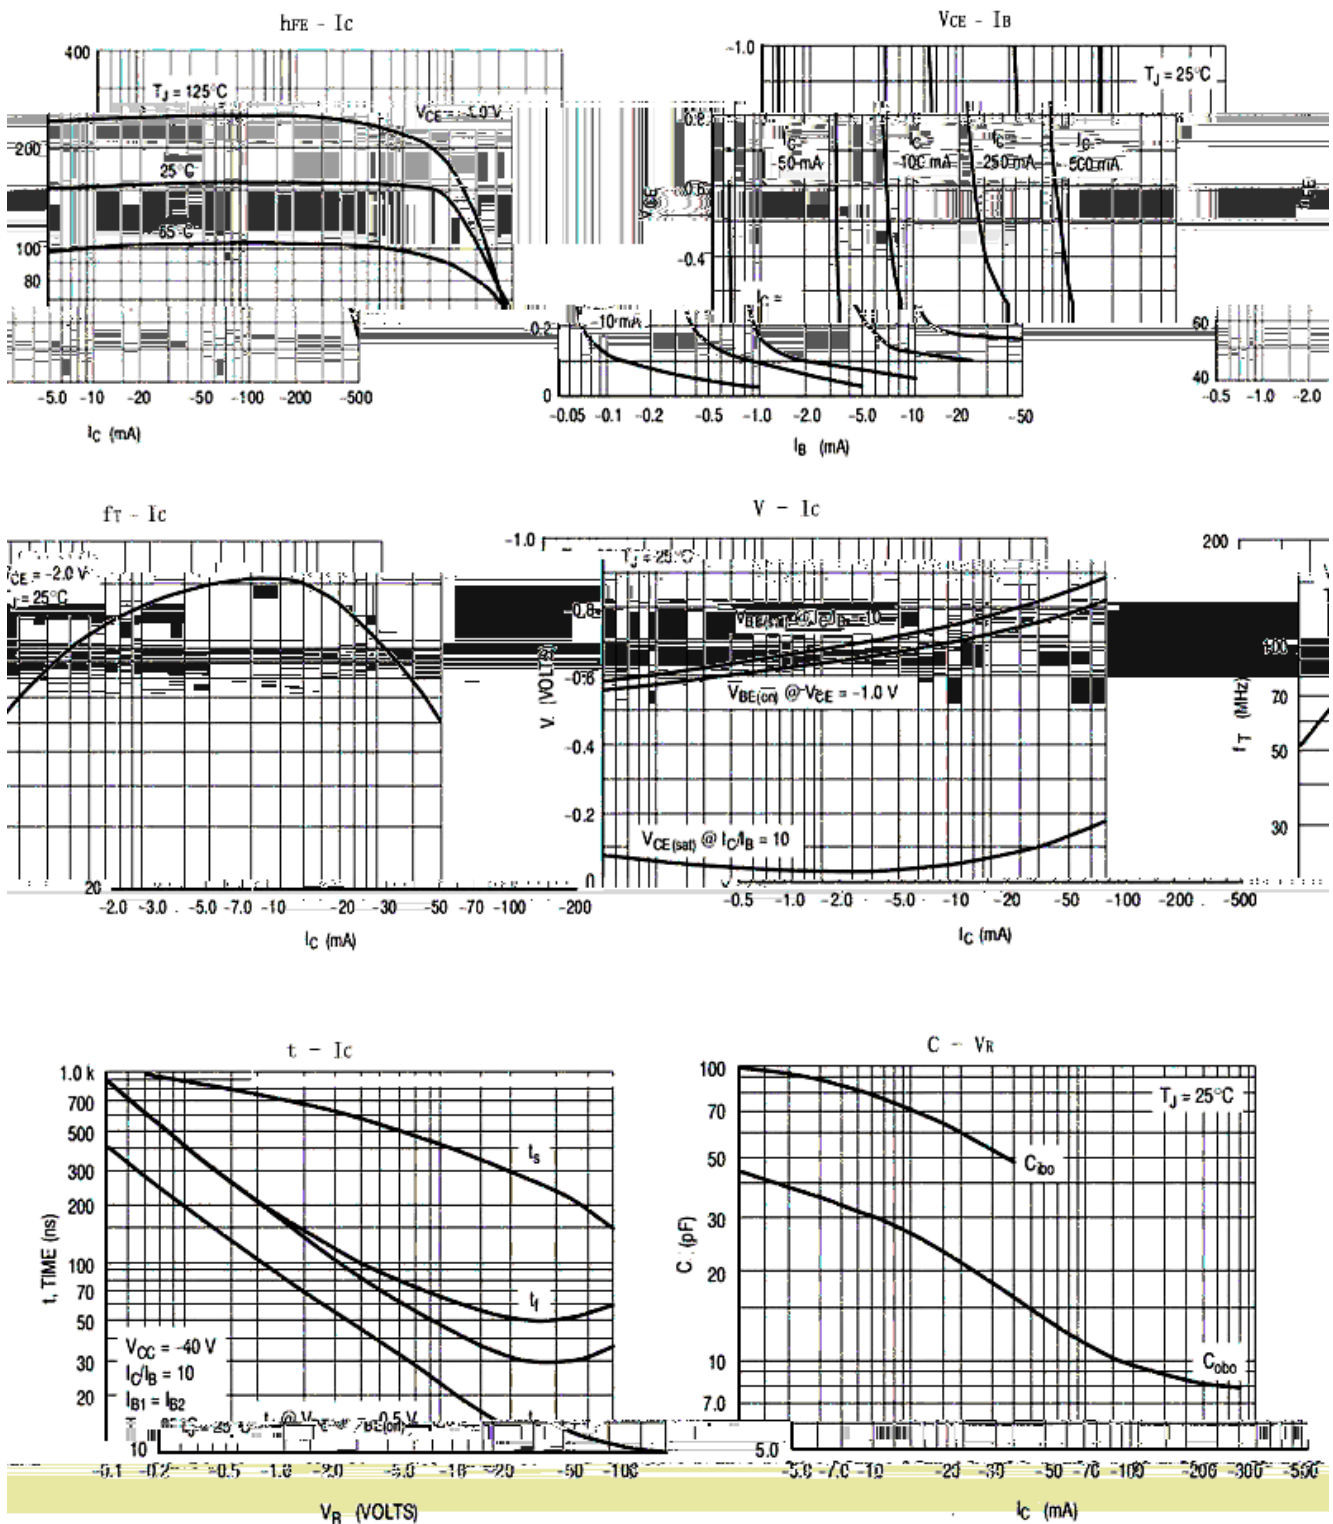


/ Package Dimensions

SOT-23


单位; mm

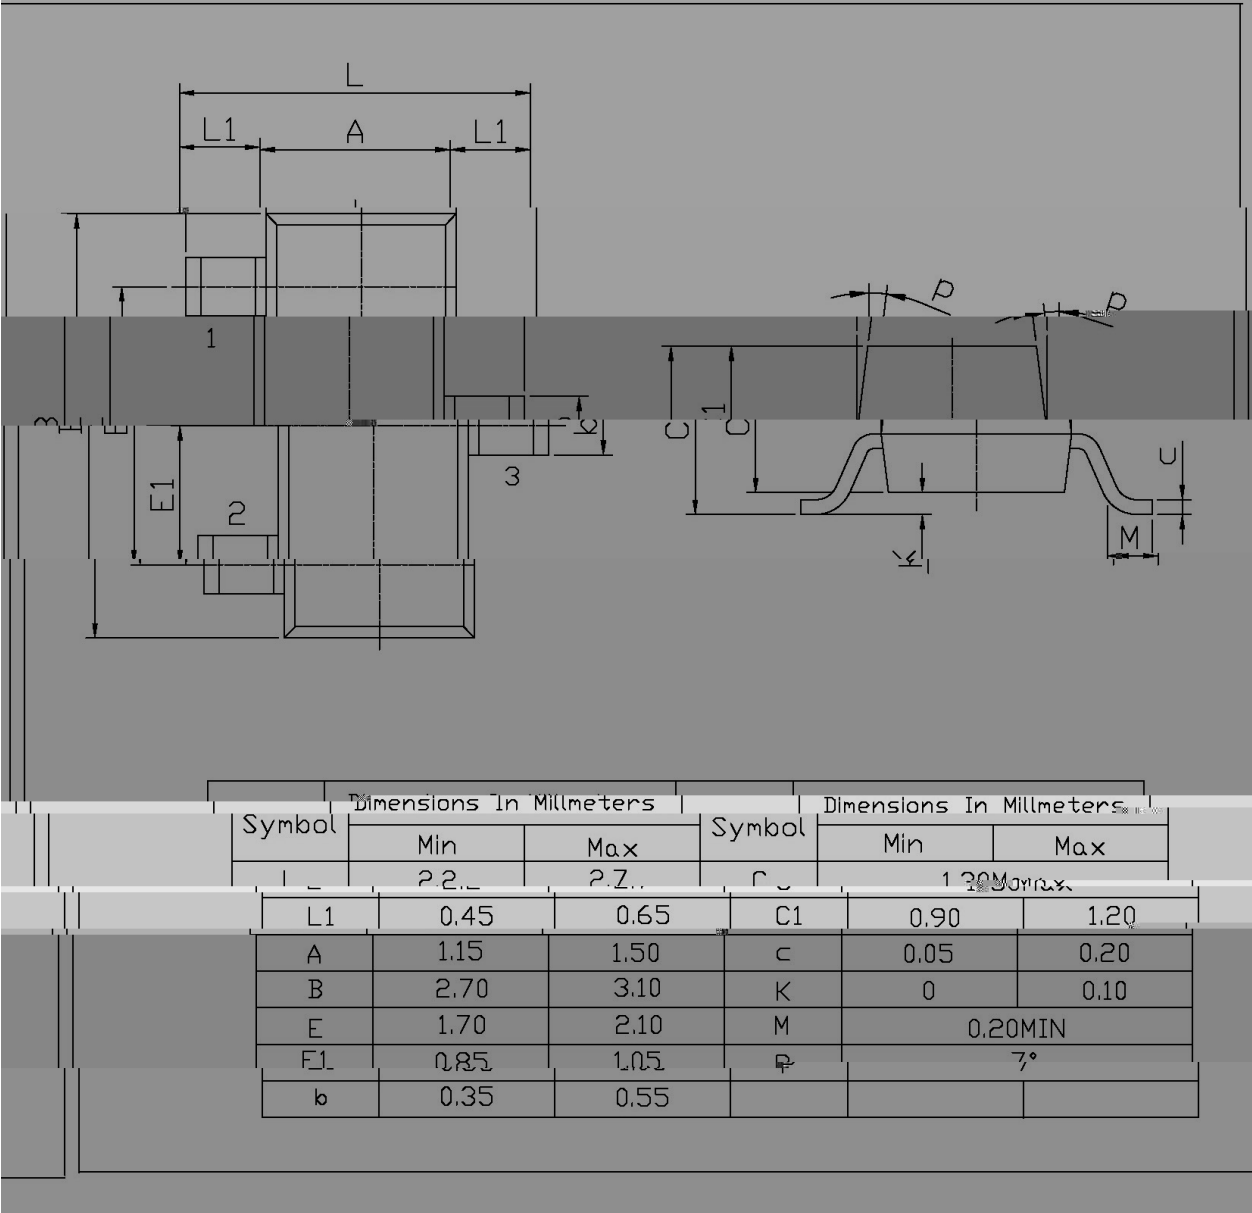

/ Marking Instructions

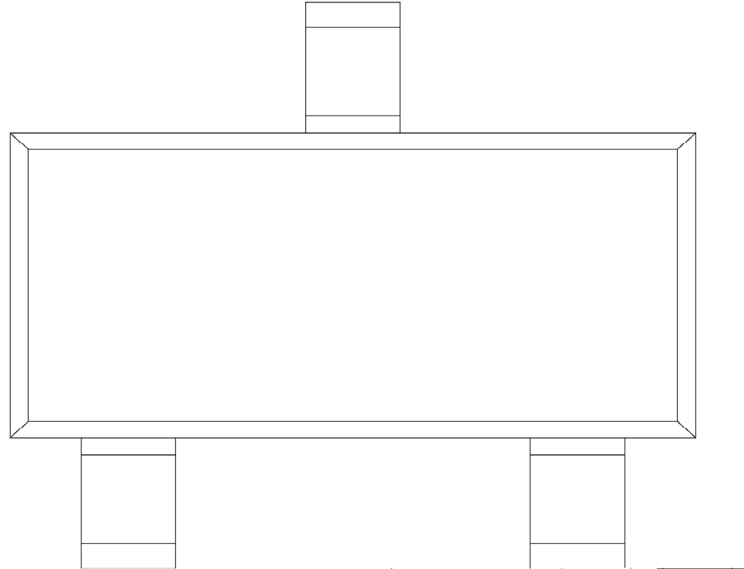

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

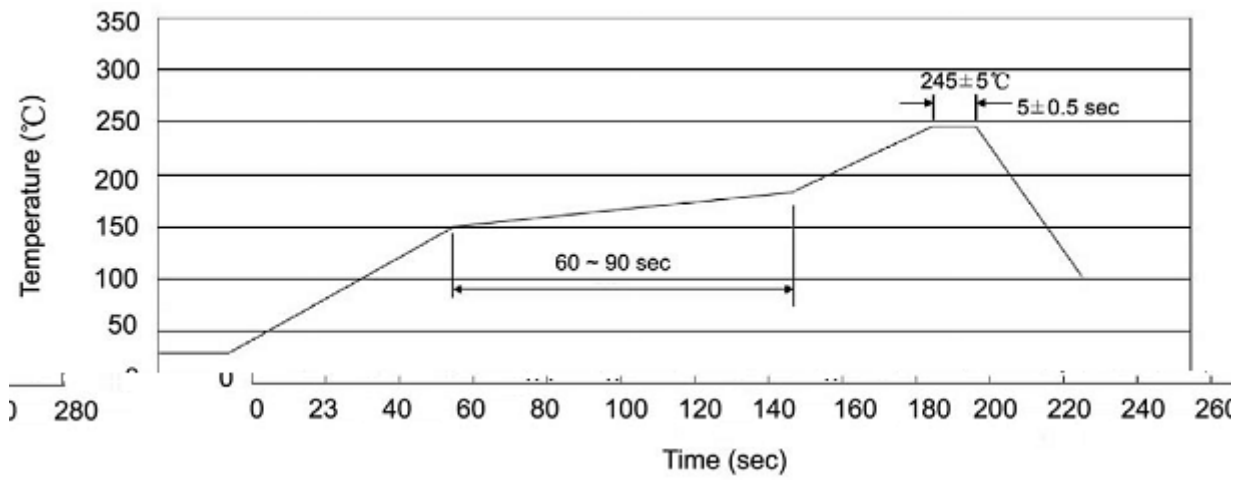

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

|        | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel  | Inner Box   | Outer Box   |
|--------|------------|-----------------|-----------------|-----------------------|-----------------|-------|-------------|-------------|
| SOT-23 | 3,000      | 10              | 30,000          | 6                     | 180,000         | 7" x8 | 180×120×180 | 390×385×205 |

/ Notices