

MMBTA56

/ Descriptions


SOT-23 PNP

/ Features

M MBTA06

/ Applications

/ Equivalent Circuit




/ Pinning



/ Marking


/ Electrical Characteristic Curve

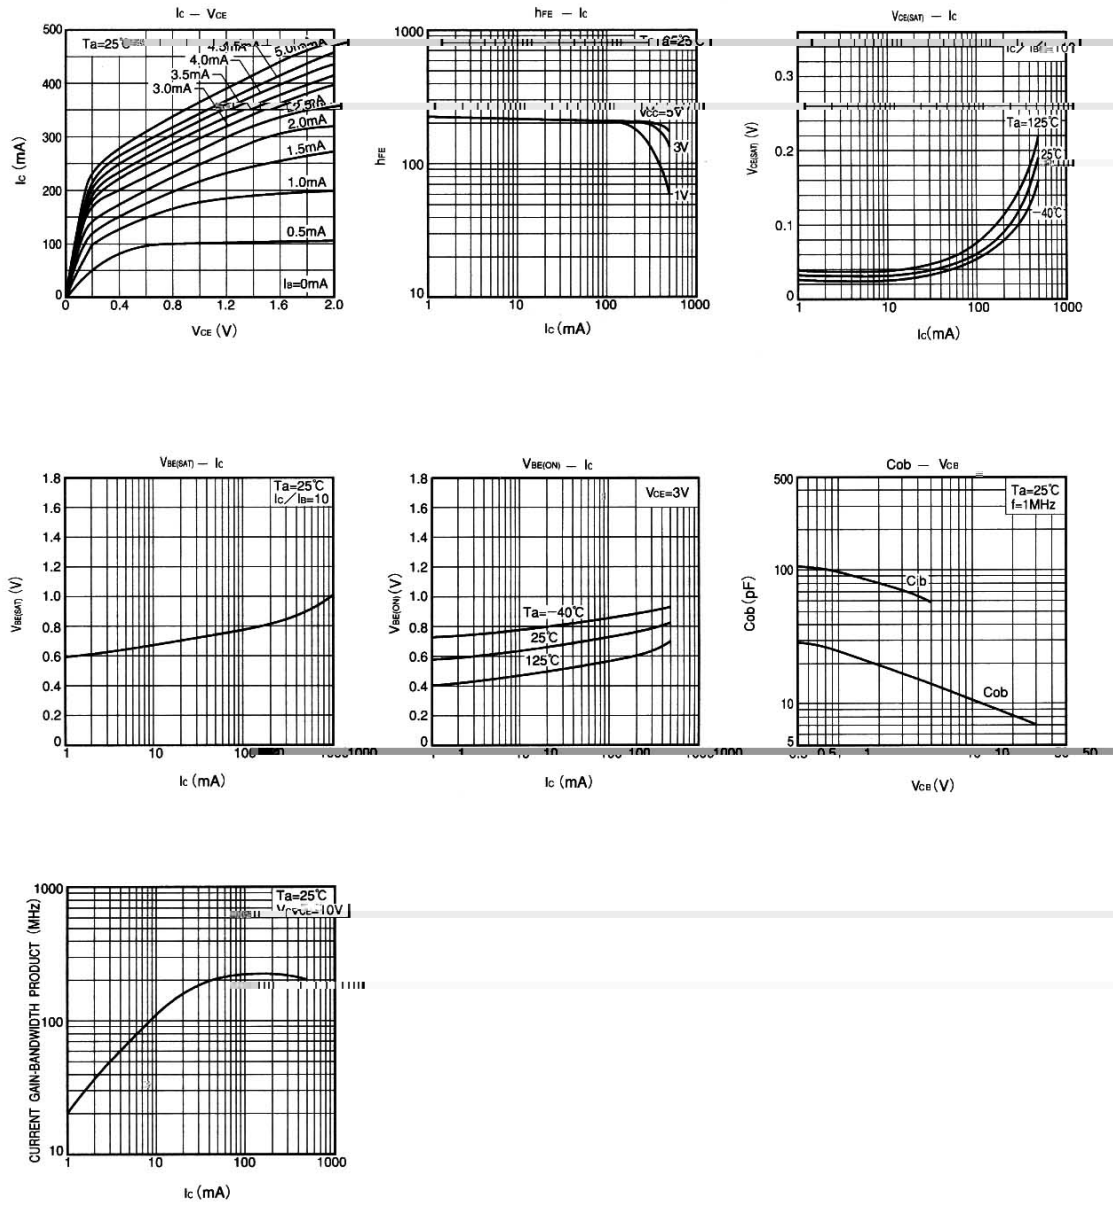

/ Package Dimensions


SOT-23

单位：mm

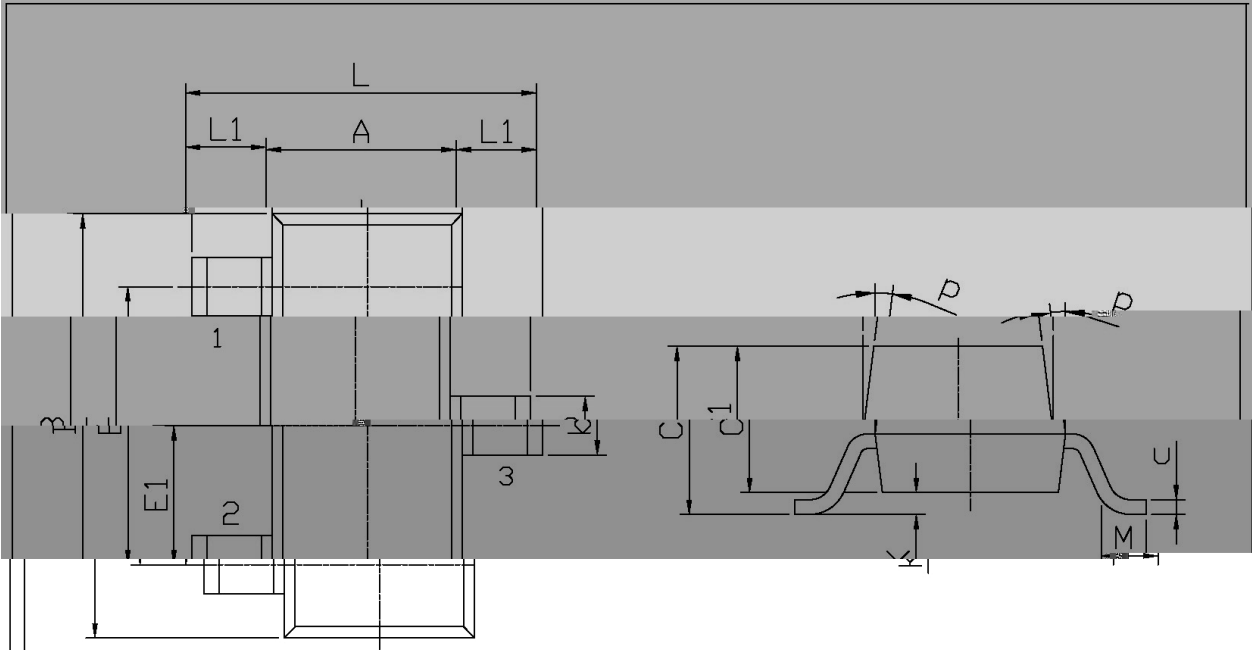


Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
L	2.2	2.7	C	1.30	1.30 max
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	P	7°	
b	0.35	0.55			

/ Marking Instructions

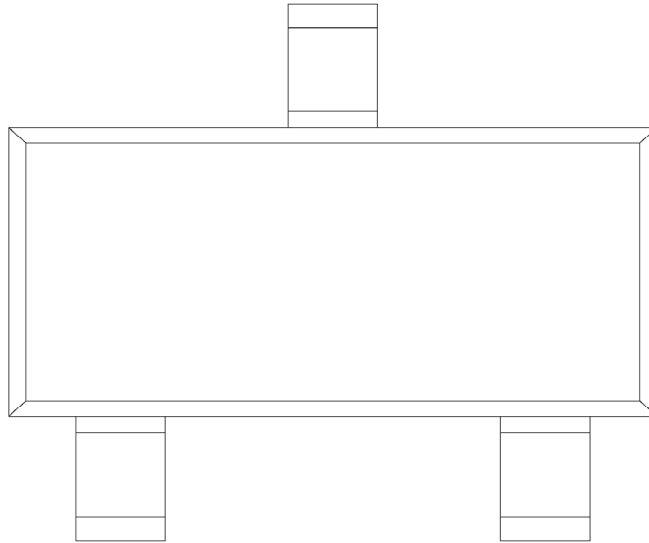

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

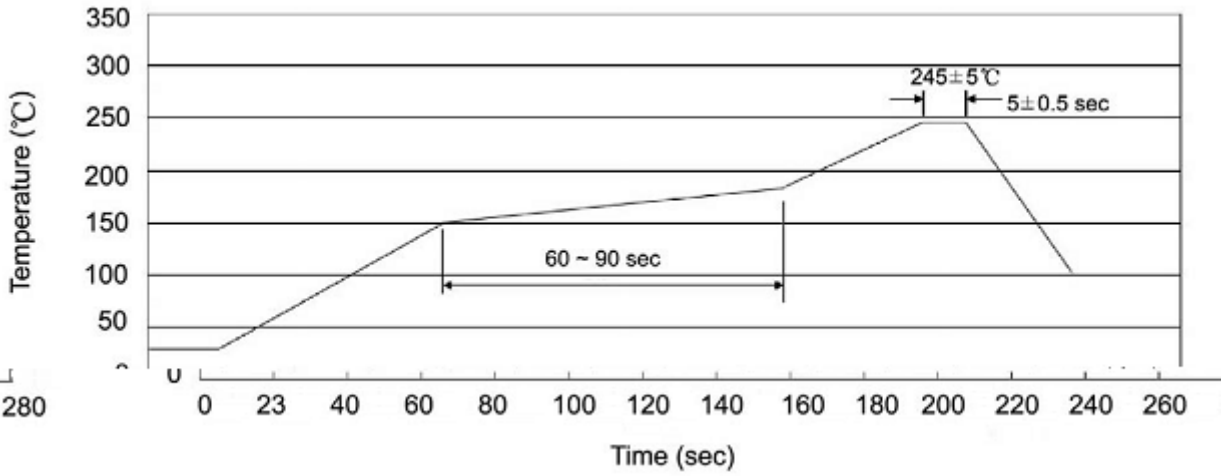

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices