


Rev.E Mar.-2016

TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

$V_{CEO}=25V$, $P_C=625mW$

$V_{CEO}=25V$, $P_C=625mW$.

General purpose amplifier applications.




PIN1 Collector PIN 2 Base PIN 3 Emitter


See Marking Instructions.

Rev.E Mar.-2016

T0-92

Unit: mm

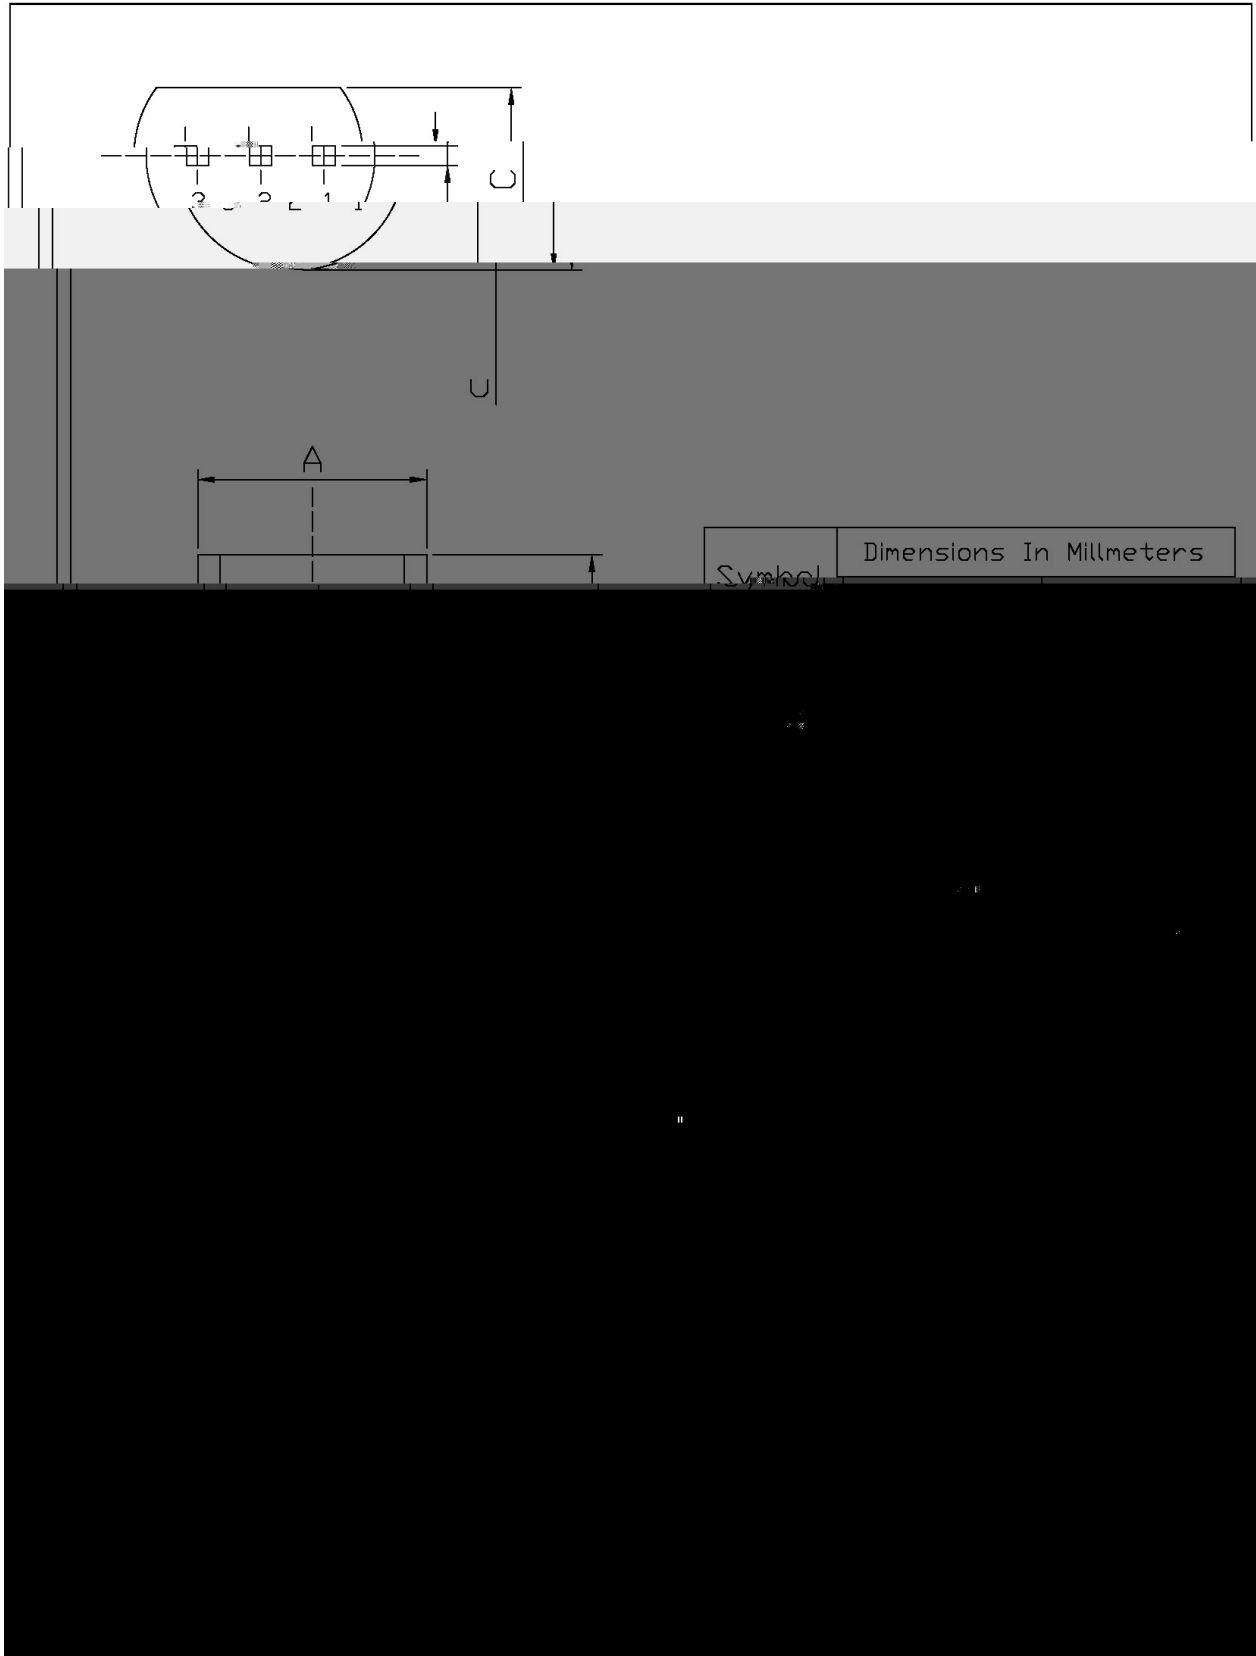

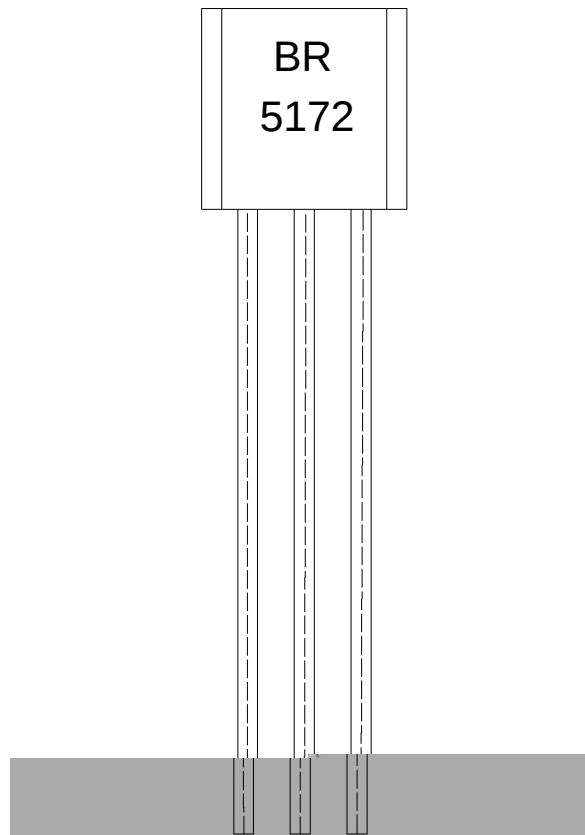

BR:


5172

Note:

BR: Company Code.

5172: Product Type.

****: Lot No. Code,code change with Lot No.

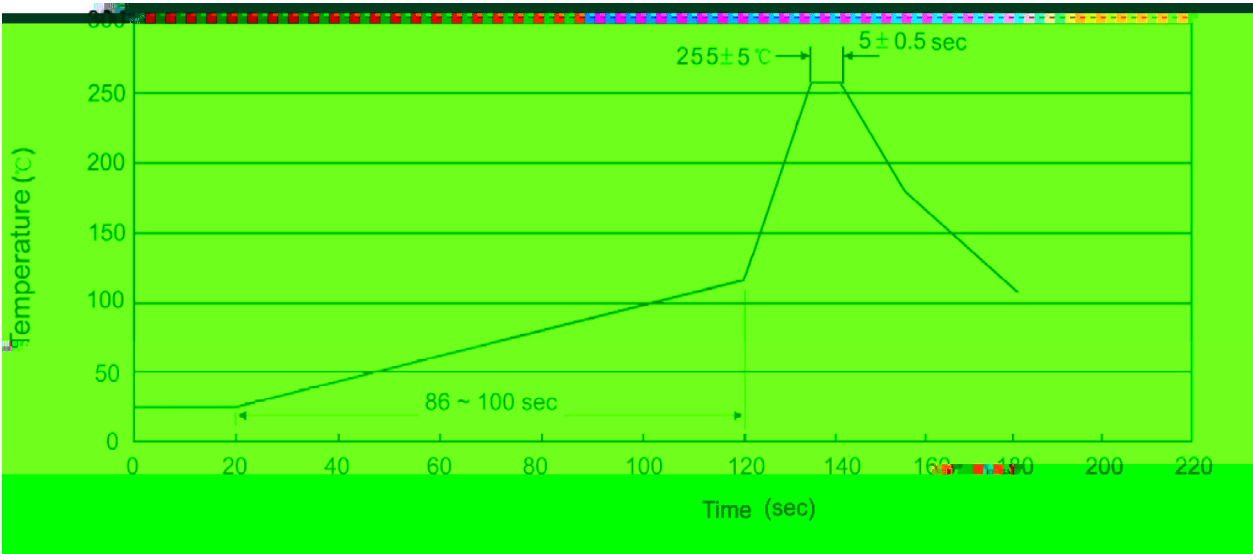

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱
							小箱 , 大箱