


100V~1000V

4.0A



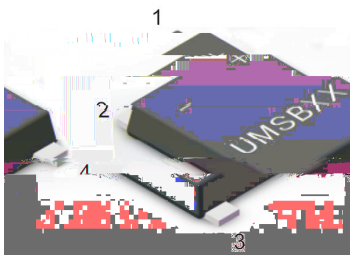

()								
								℃




		℃		μ
		℃		

Fig.1 Average Rectified Output Current

Fig.2 Typ



UMSB

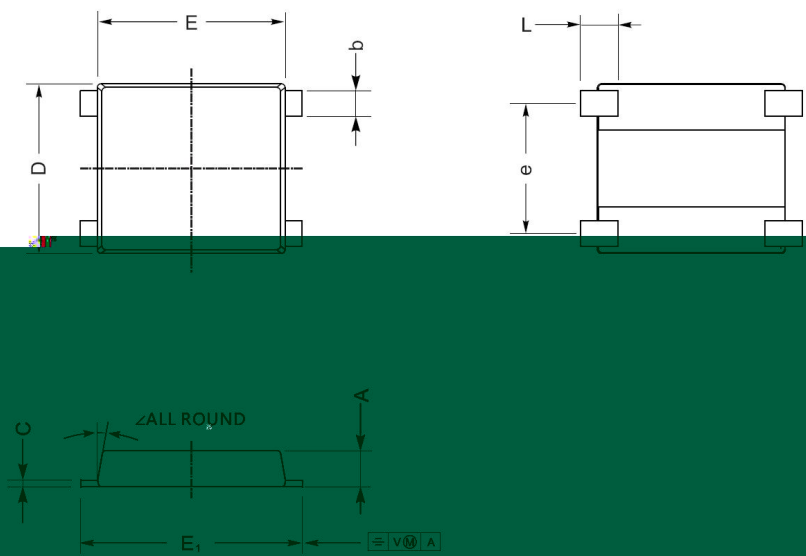

UMSB mechanical data


UNIT		A	C	D	E	E ₁	L	e	b	∠
mm	max	1.5	0.29	7.0	7.6	8.9	1.6	5.3	1.15	10°
	min	1.3	0.17	6.2	7.1	8.4	1.0	4.9	0.95	
mil	max	59	12	276	299	350	55	209	45	
	min	51	7	244	280	331	31.5	193	37	

Marking

marking

ing code
IB40B
IB40D
IB40G
IB40J
IB40K
IB40M

Type number	Mark
MSB40B	M
MSB40D	M
MSB40G	M
MSB40J	M
MSB40K	M
MSB40M	M

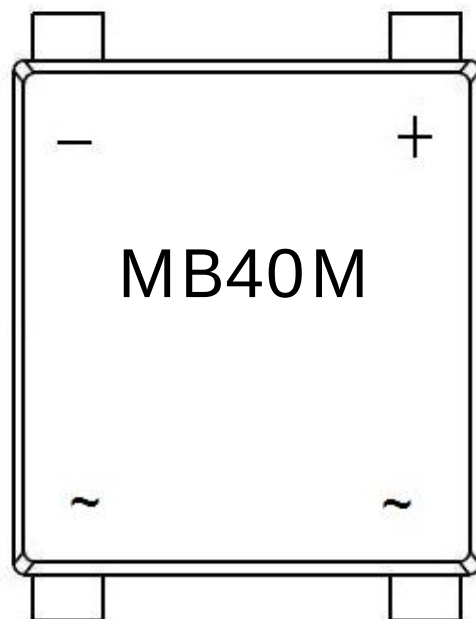


MB40M

1

3

MB40M

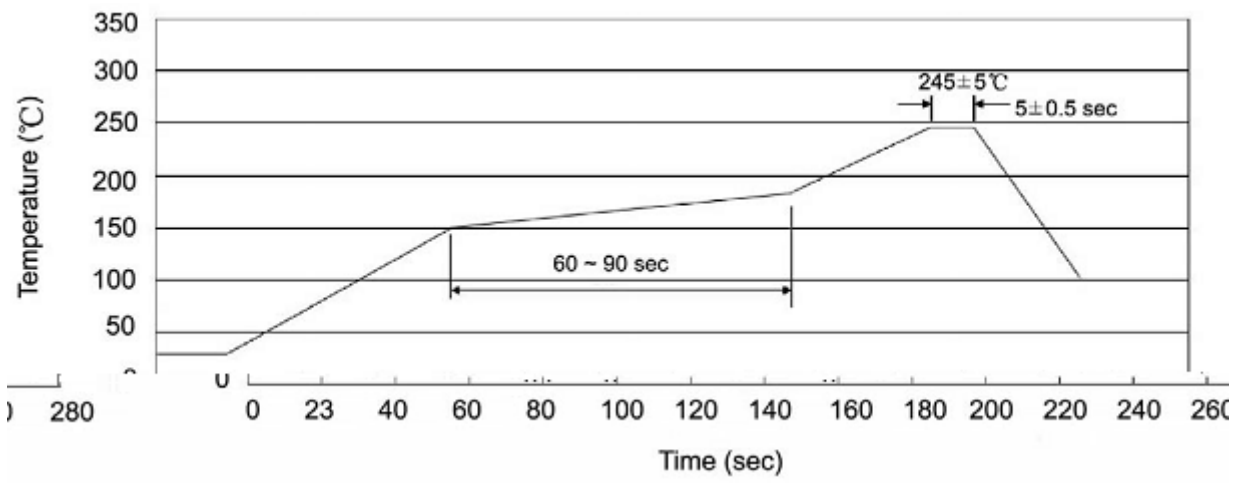

± ± ± ±

± ± °C