

/ Descriptions

Silicon NPN transistor in a SOT-89 Plastic Package.


/ Features

Low $V_{CE(sat)}$, high current, HF Product.


/ Applications

General purpose switching and muting, LCD back-lighting, supply line switching circuits.

/ Equivalent Circuit



/ Pinning

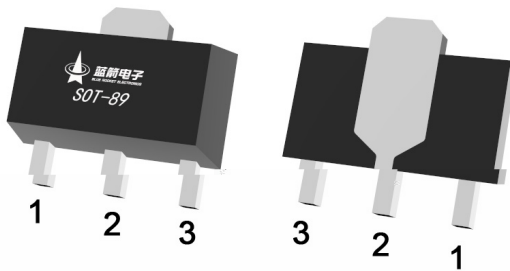

PIN1 Base PIN 2 Collector PIN 3 Emitter


/ Marking

Marking	HS43 * *
---------	-------------

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	50	V
Collector to Emitter Voltage	V_{CEO}	50	V
Emitter to Base Voltage	V_{EBO}	5	V
Collector Current - Continuous	I_C	3	A
Collector Base - Continuous	I_B	0.5	A
Peak Collector Current	I_{CM}	5	A
Total Power Dissipation	P_{tot}	550	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-65 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=50V$ $I_E=0$			100	nA
Collector Cut-Off Current	I_{CBO}	$V_{CB}=50V$ $I_E=0$ $T_j=150$			50	μA
Collector Cut-Off Current	I_{CES}	$V_{CE}=50V$ $V_{BE}=0$			100	nA
Emitter Base Cut-Off Current	I_{EBO}	$V_{EB}=5.0V$ $I_C=0$			100	nA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=2.0V$ $I_C=0.1A$	300			
	$h_{FE(2)}$	$V_{CE}=2.0V$ $I_C=0.5A$	300			
	$h_{FE(3)*}$	$V_{CE}=2.0V$ $I_C=1.0A$	300		700	

/ Electrical Characteristic Curve

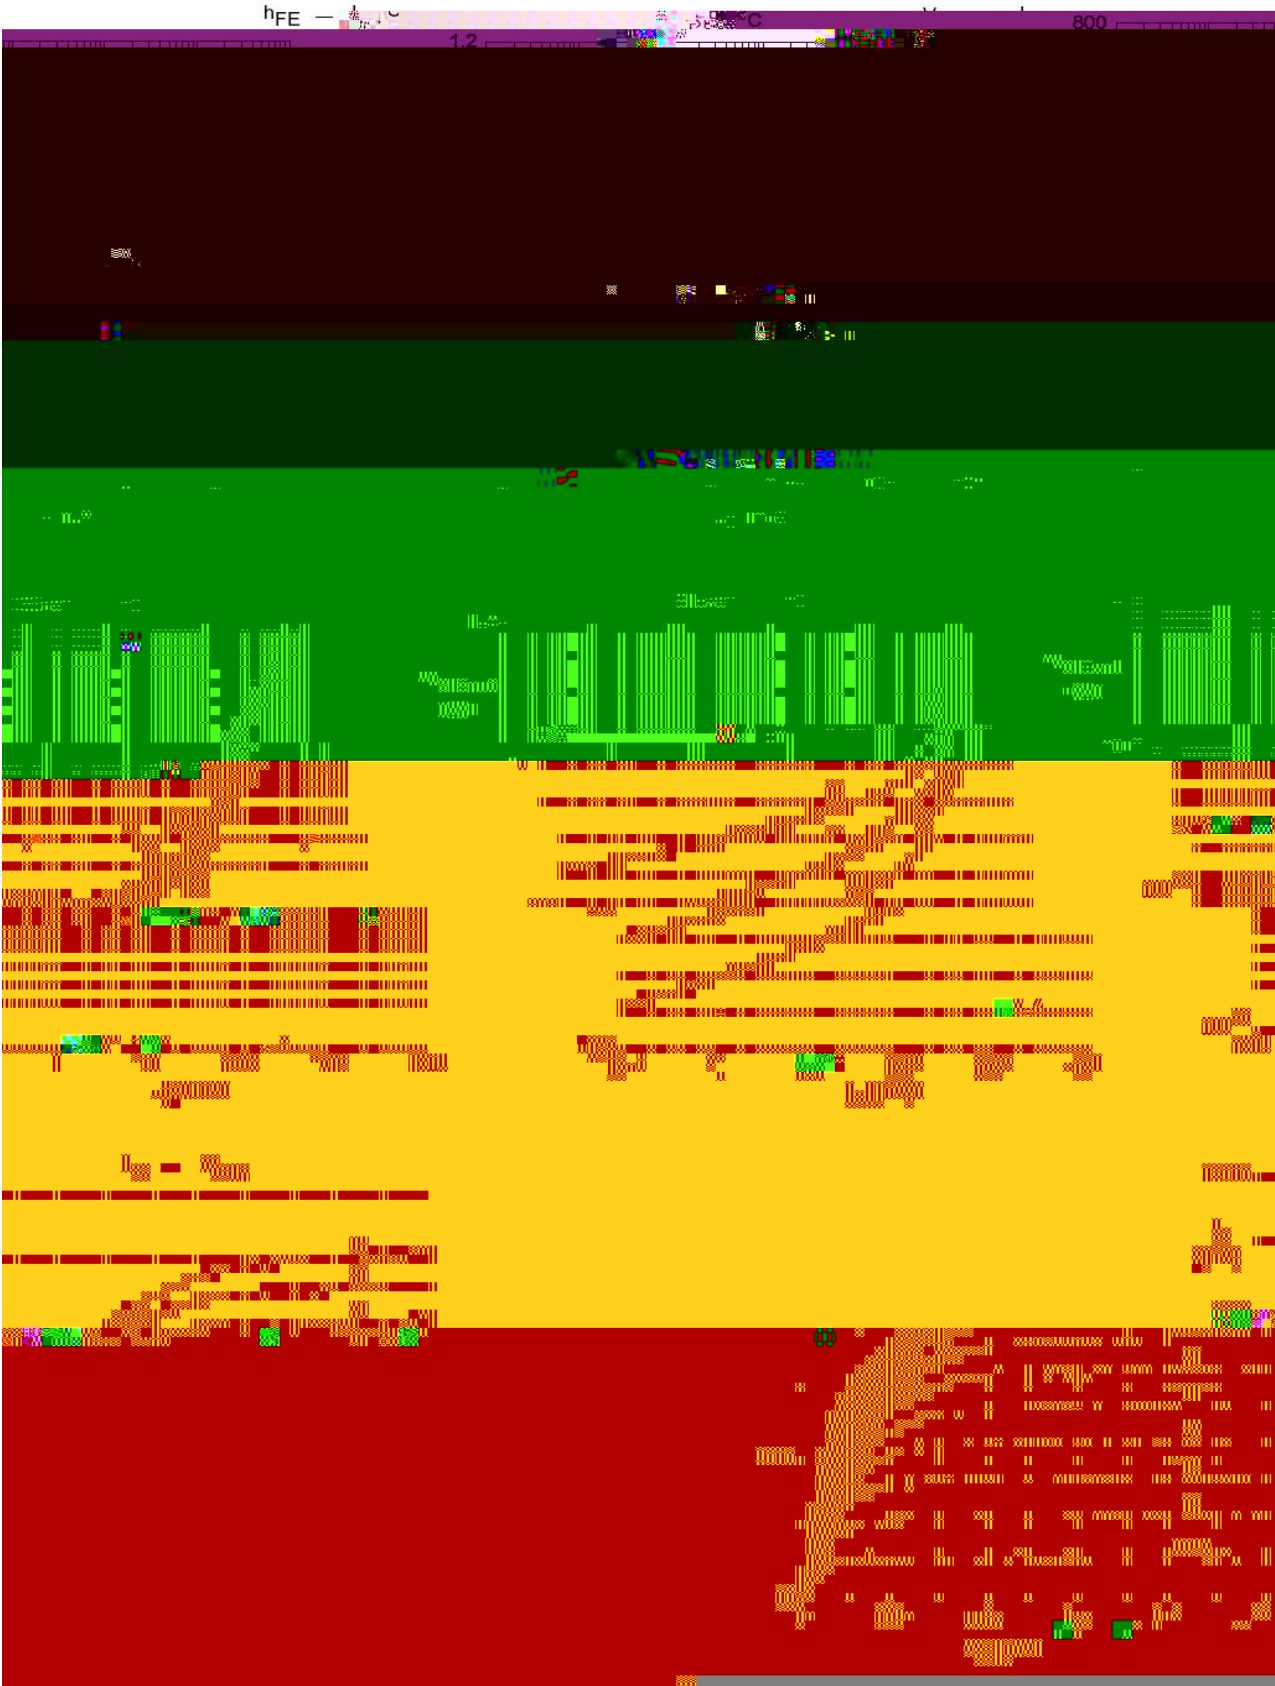


/ Package Dimensions

单位: mm

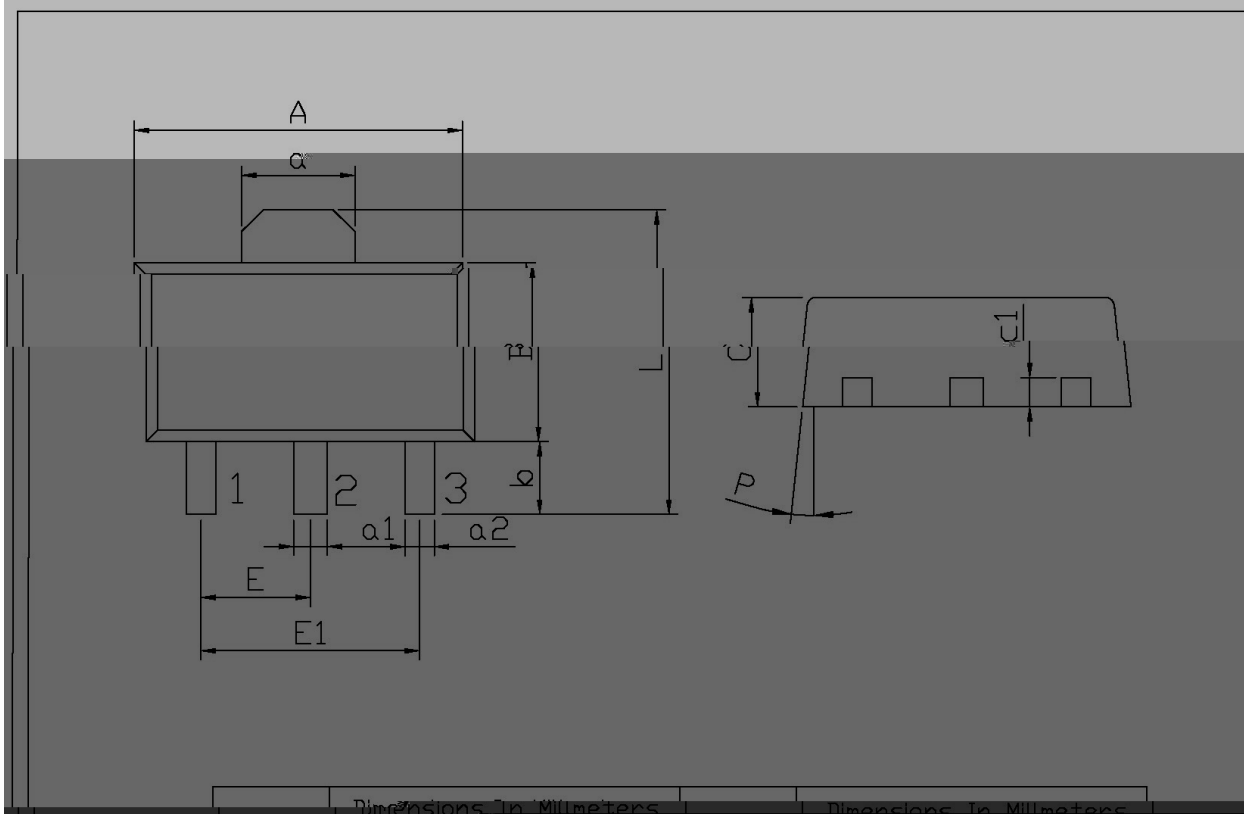

/ Marking Instructions

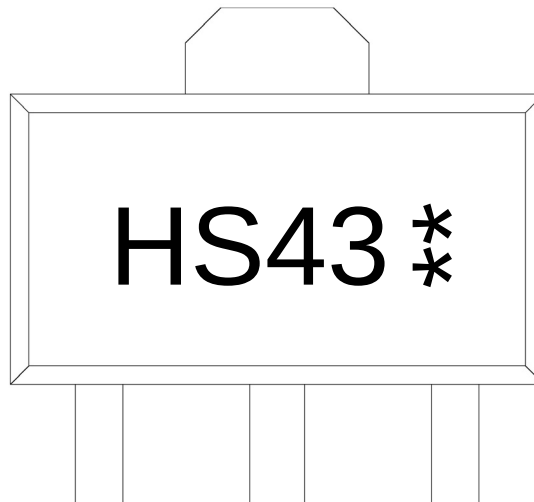

H

S43

Note:

H: Company Code

S43: Product Type Code

** : Lot No. Code, code change with Lot No.

() /



Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 °C , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 ± 5 °C , Duration:5 ± 0.5sec.
- 3

2 10

/sec.

3. Cooling Speed: 2~10 °C /sec.

/ Resistance to Soldering Heat Test Conditions

260 ± 5 °C 10 ± 1 sec. Temp.:260±5 °C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	6	42,000	7 ×12	180×120×180	390×385×205

/ Notices