


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

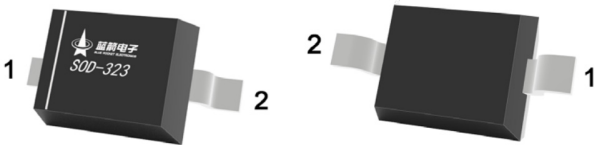


/ Marking


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

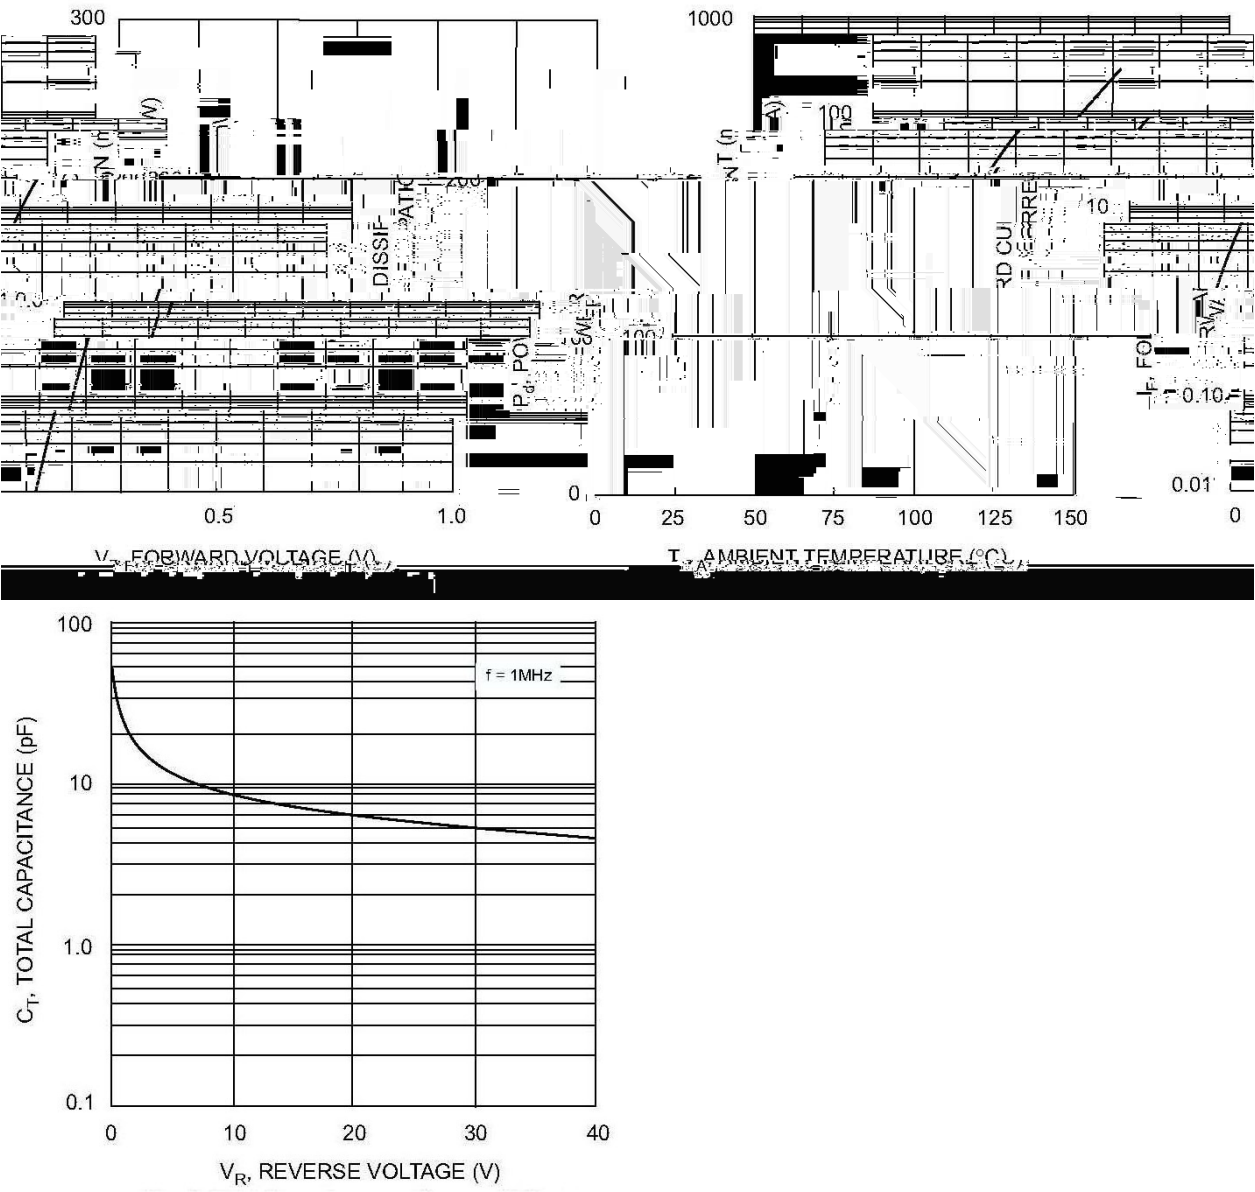

/ Package Dimensions

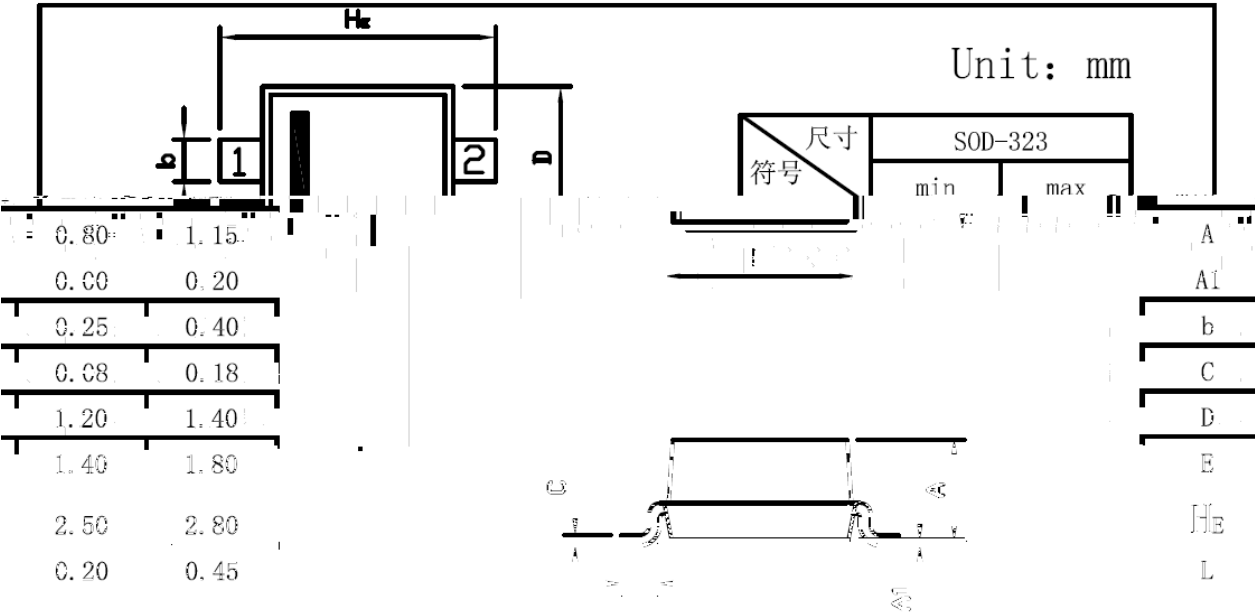


SD103AWS/BWS/CWS

Pin 1 CAP 1 Pin 2 AN 1

SOD-323

/ Marking Instructions

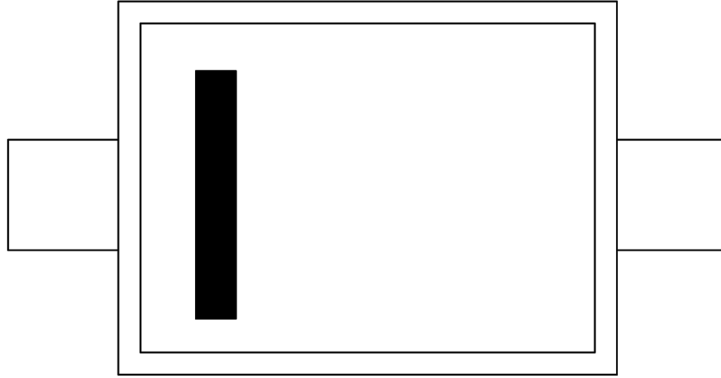

H

S4

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices