


" (" ") * + , - * . " / * 0 1 / . " "

[illegible]

!"



" " (" " # * - 0/,9:,17 - "

40V

3.0A

:

:

" " (" " ; * 5:</ * - "

"


" " (" " \$ 99=,05:,17 - " "

.

" " (" " ' ><, + 5 - * 7 : " ? , / 0 < , : "




" " (" " @, 77, 78"

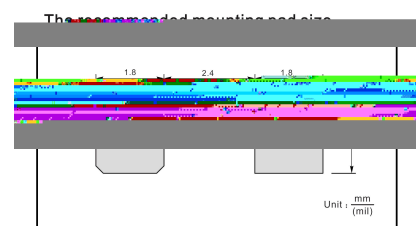

" " (" " 45/6,78

!"



""("\$B-1<:*"45C,D<D")5:,78-E%5FAG H"

"

参数	符号	数值	单位
	()		
			℃
			℃
			℃

)

)

""(" "'=*0:/,05-"? I5/50:* /,-:,0-E%5FAG H"


"

参数	符号	测试条件	数值	单位
		℃		
		℃		

" (" " ' =*0:/,05=" ? 15/50:* /,-:,0" ? </+*"

Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics

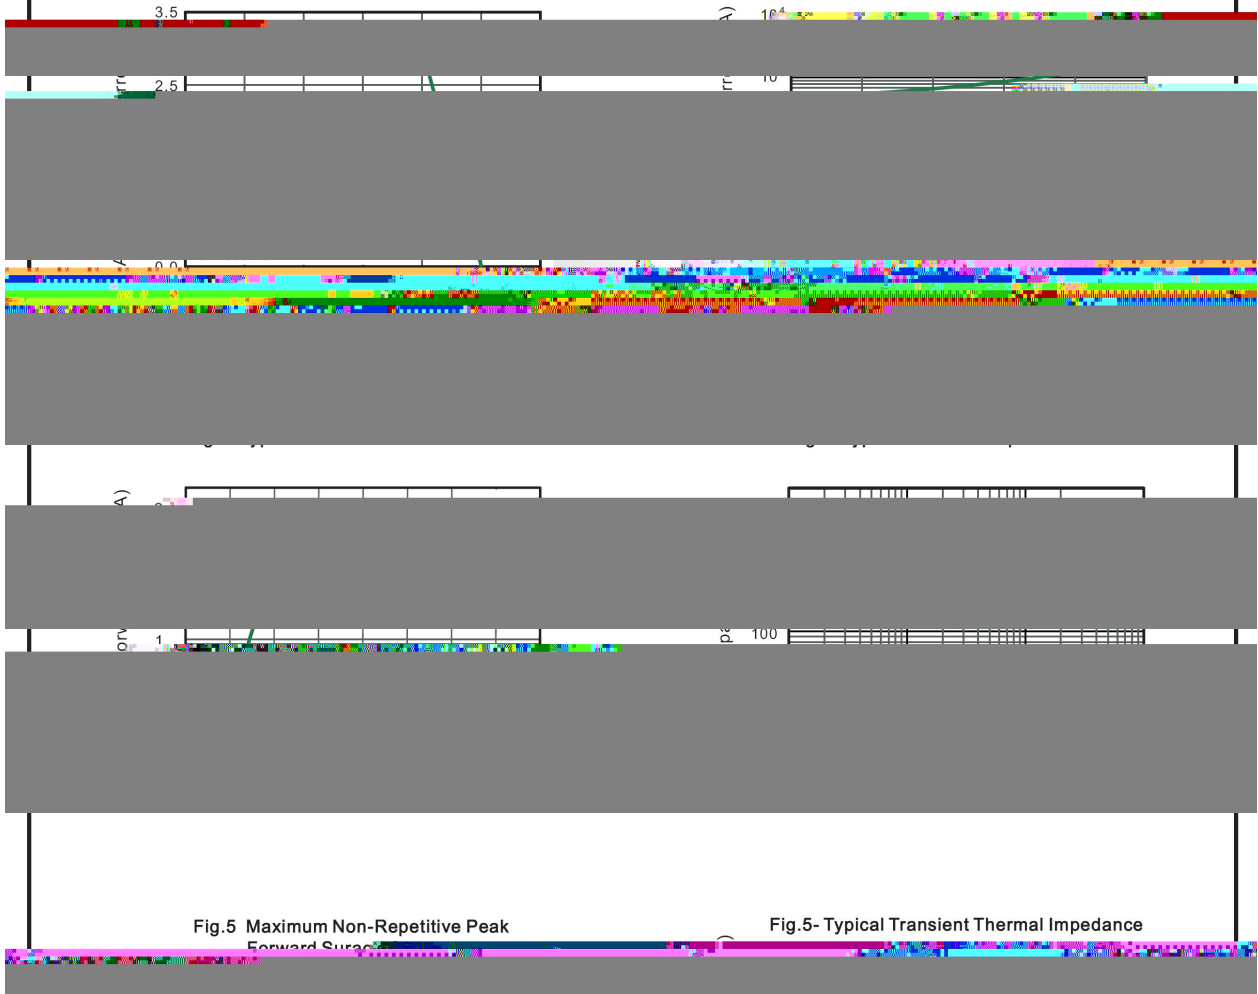

!"




#\$%\$" & ' '%

" " (" " @50658*"#,D*7-,17 -"

"

SMA

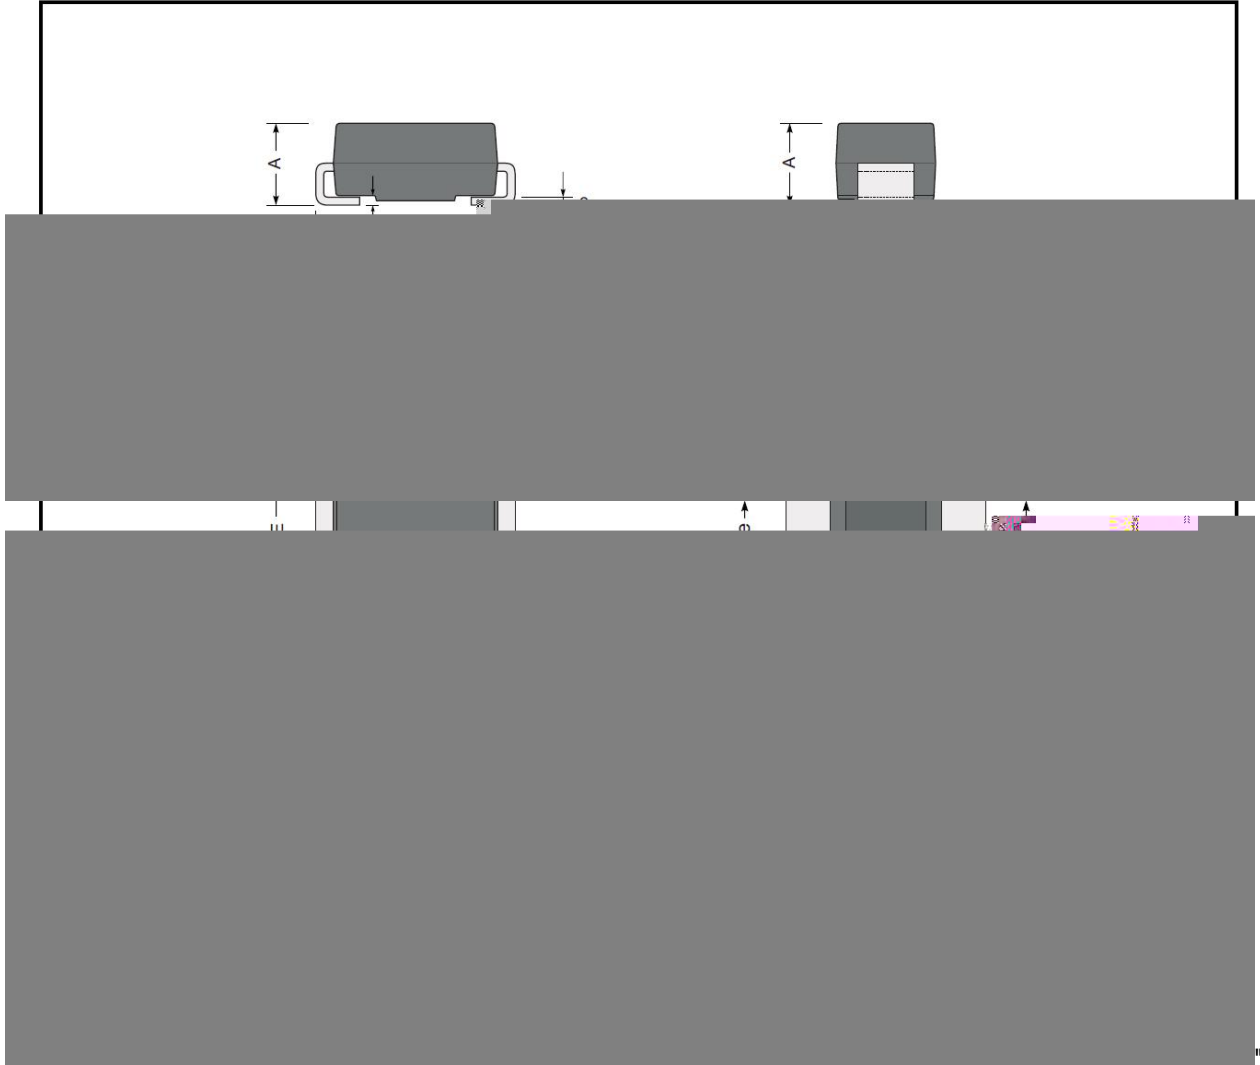

!"




#\$%\$" & ' '%


" " (" " 45/6,78"j7-:!/<0:,17 - "

SSL34	SSI 34

!"



" " (" " 45/6,78"j7 - :/<0:,17 - "

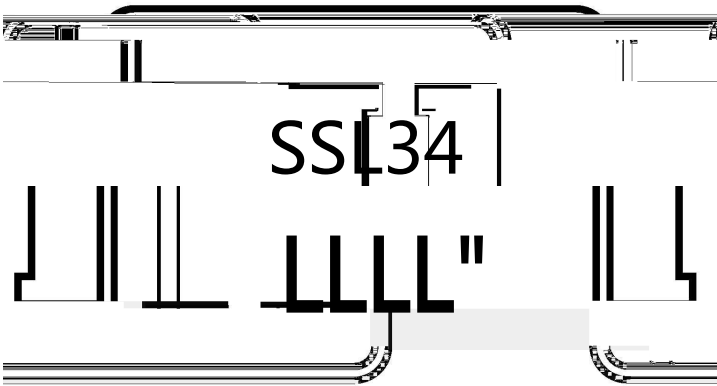

SSL34
LLLL"

1 *

3 *

SSL34
LLLL

*


*

!"



#\$\$" & ' '%

E H" " (" " Temperature Profile for IR Reflow Soldering(Pb-Free)

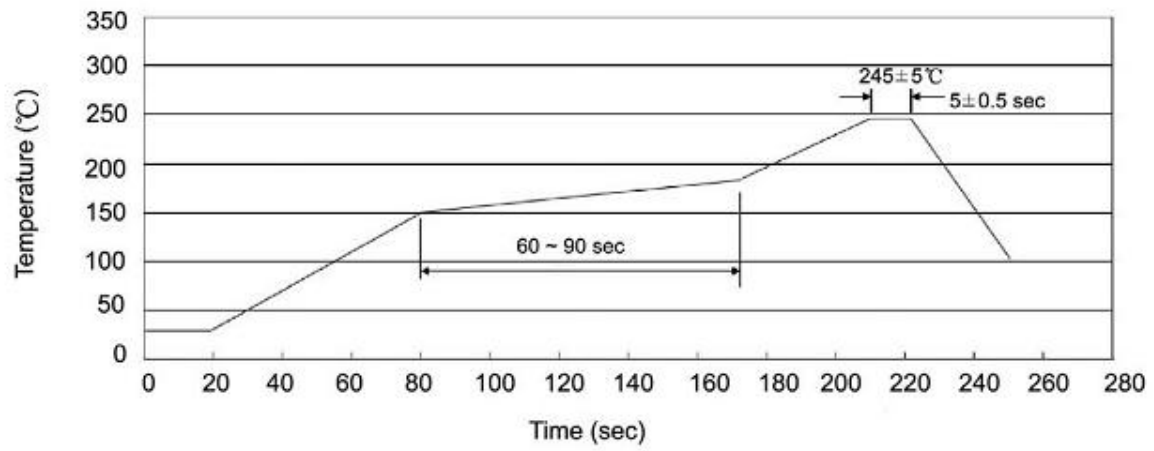

±

±

±

±

" " (" ") * -, -:570*":1" 1-. */ ,78"&*5:"%* -:"?17 ., :,17 -"

± 2 ±