

/ Revised record

A	2018-1				
B	2019-5-11	1 4 6 7	,		
C	2022-1-4	2/3	Cj 180 600 R0JA 60 改为 45; 更新曲线图 Fig.1 Forward Current Derating Curve(90 改到 125℃)IR 25℃ 0.1 改为 1, 增加 100 IR 		

/ Descriptions

100V 5.0A SMBF

Surface Mount Schottky Barrier Rectifier, Reverse Voltage:100V,Forward Current:5.0A,SMBF thin package.

/ Features

Low power loss, high efficiency, High forward surge current capability, For use in low voltage, high frequency inverters, and polarity protection applications,For surface mounted applications,Halogen free product.



/ Applications

General purpose.

/ Equivalent Circuit



/ Pinning

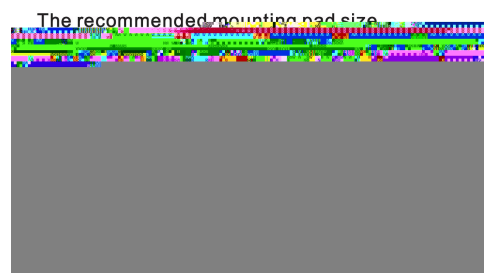

/ Marking




See Marking Instructions.

Note:

- 1) Measured at 1MHz and applied reverse voltage of 4 V D.C.
- 2) P.C.B. mounted with 2.0 X2.0" (5 X 5 cm) copper pad areas.

参数 Parameter	参数符号 Symbol	测试条件 Test condition	数值 Rating	单位 Unit
Max Instantaneous Forward Voltage	V_F	$I_F=5.0A$	0.6	V
Maximum DC Reverse Current at Rated DC Reverse Voltage	I_R	$T_a=25^{\circ}C$	1.0	mA


/ Electrical Characteristic Curve

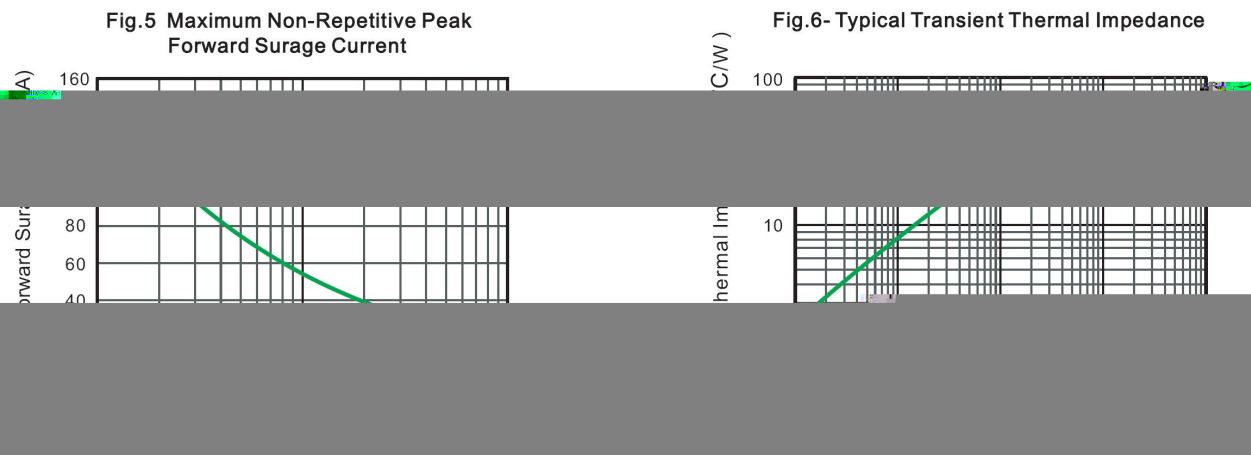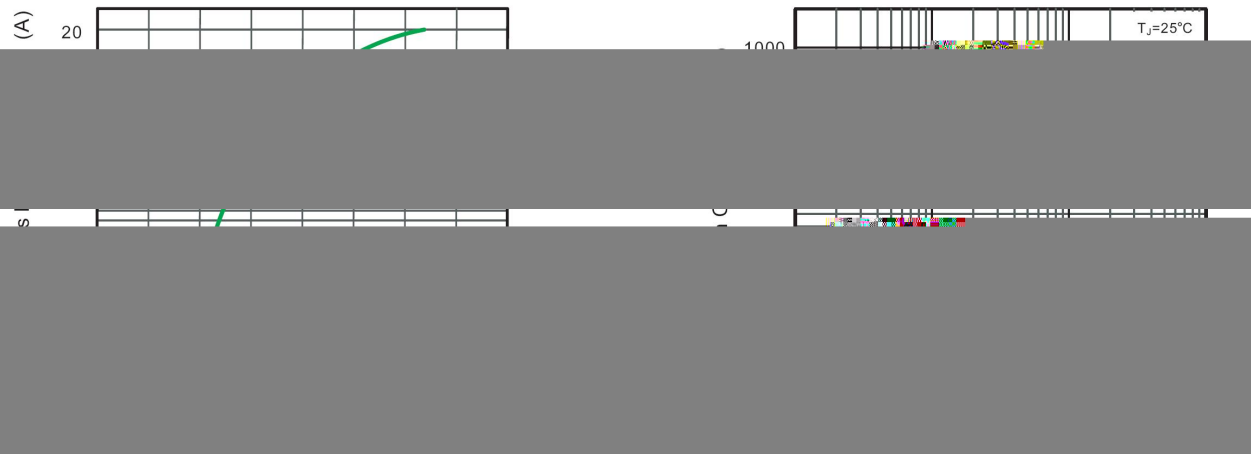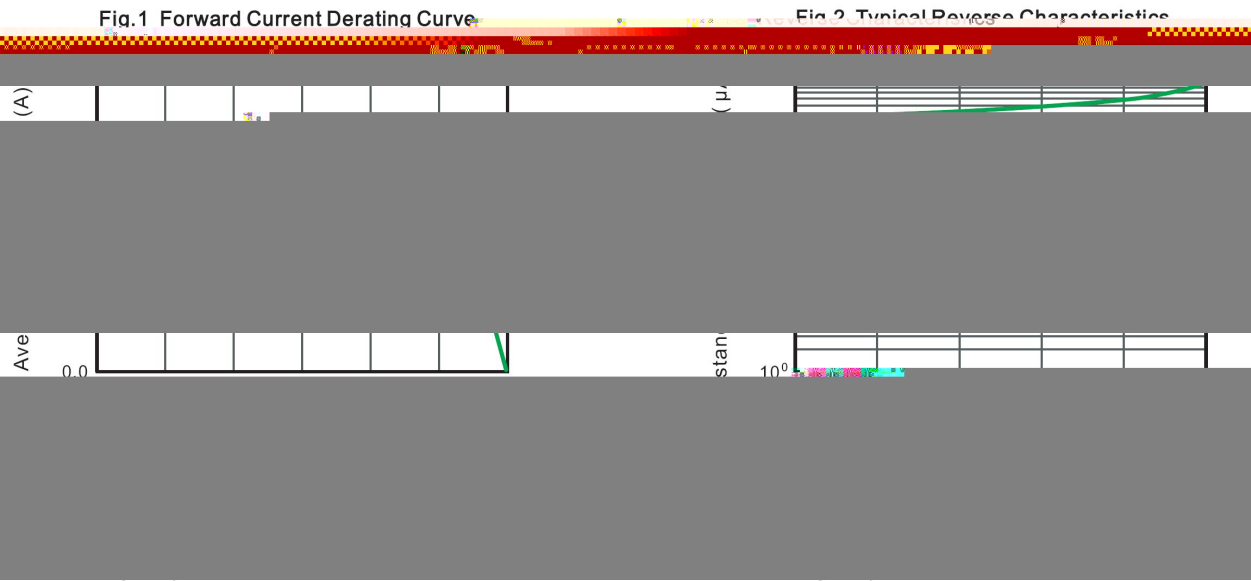




/ Package Dimensions


SMBF

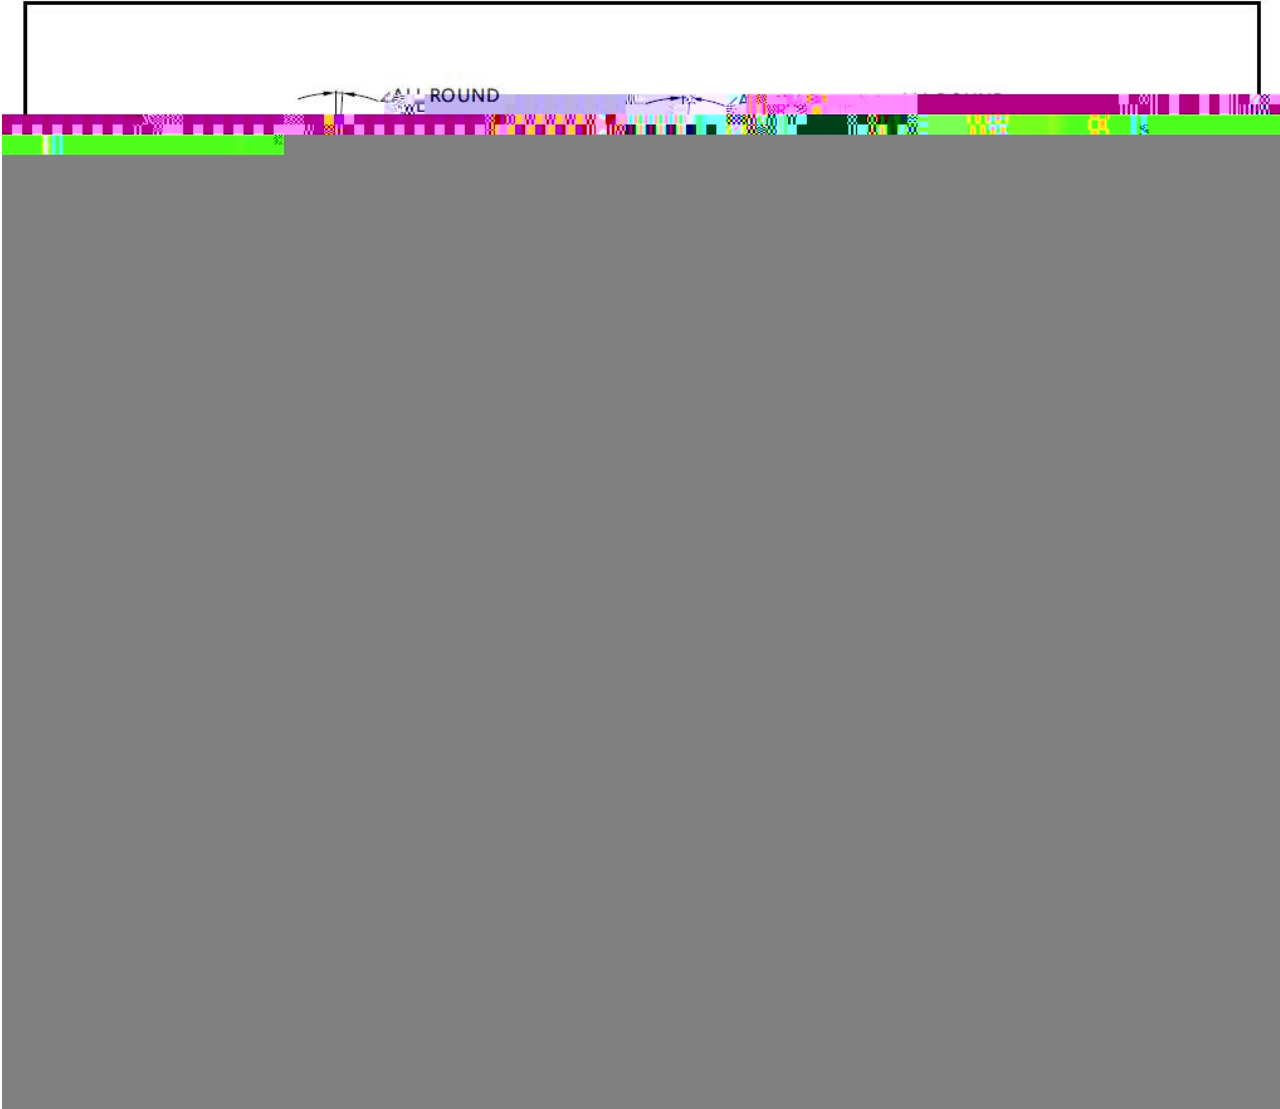




/ Marking Instructions

Marking

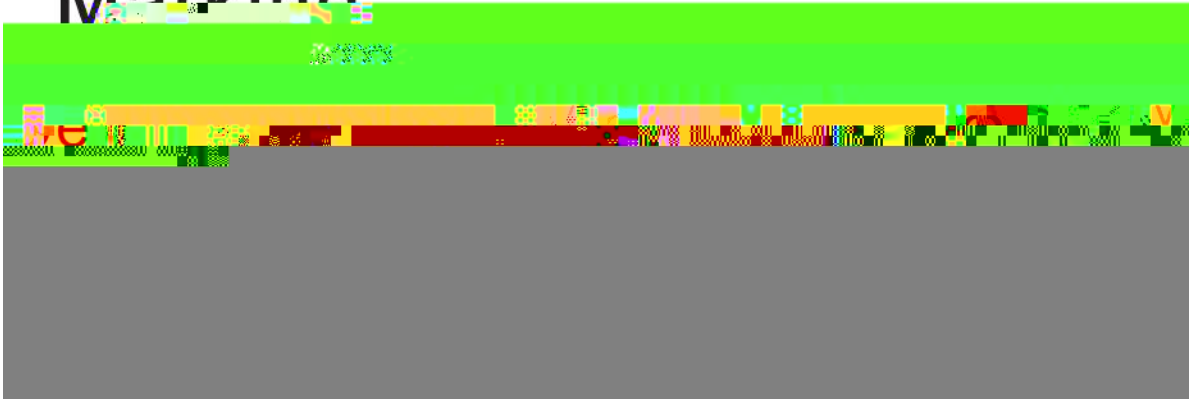

/ Marking Instructions

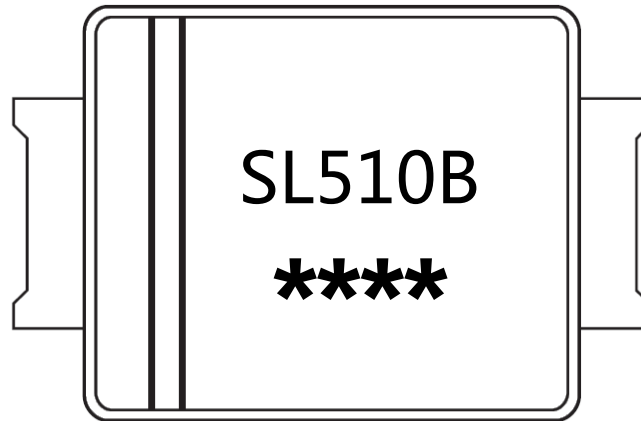

说明：


SL510B： 为型号代码

*****： 为生产批号追溯码，第 1 个*为年月代码，后面 3 个*为当月小批号代码

Note:

SL510B： Product Type Code

*****： Lot No. Code , The 1st * means:YM Code , The last 3 * means:little Lot No Code



() /

Pack

				Note:	
1	150	180	60	90sec;	1.Preheating:150~180°C, Time:60~90sec.
2	245±5		5±0.5sec;		2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3		2	10°C/sec.		3. Cooling Speed: 2~10°C/sec.

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------