







/ Descriptions**/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**

/ Absolute Maximum Ratings(Ta=25)


	°C					
						°C
		~				°C

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

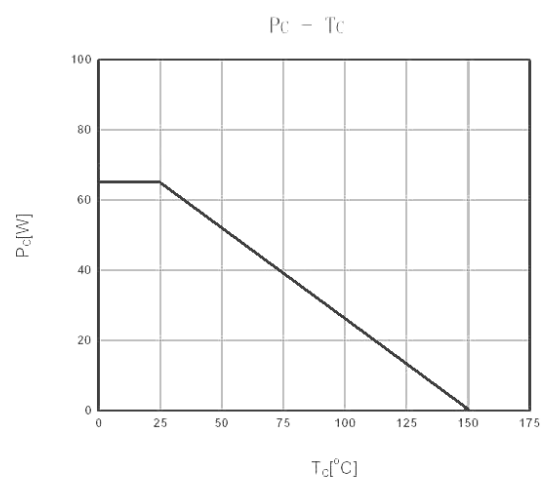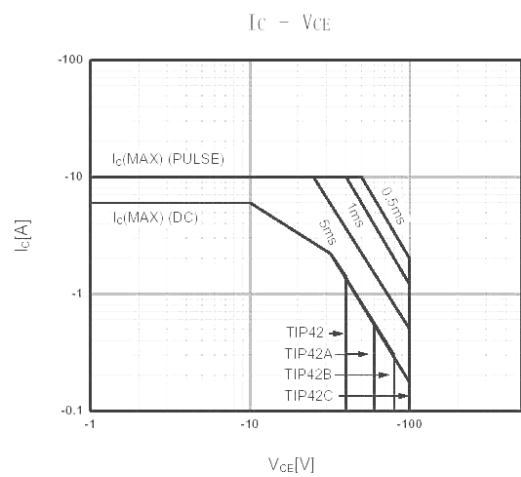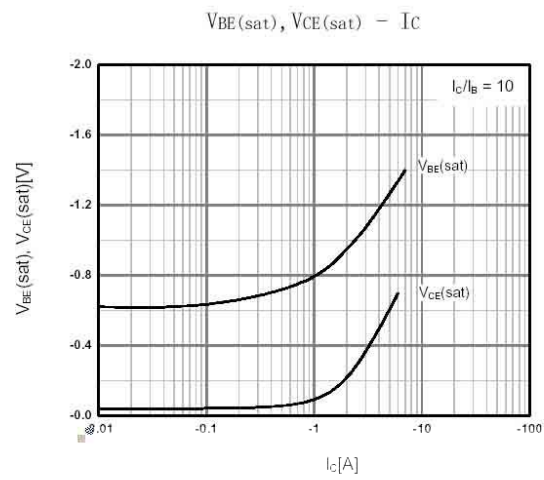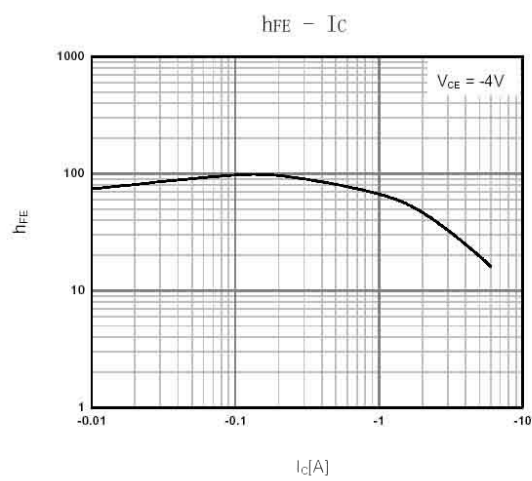


I Package Dimensions

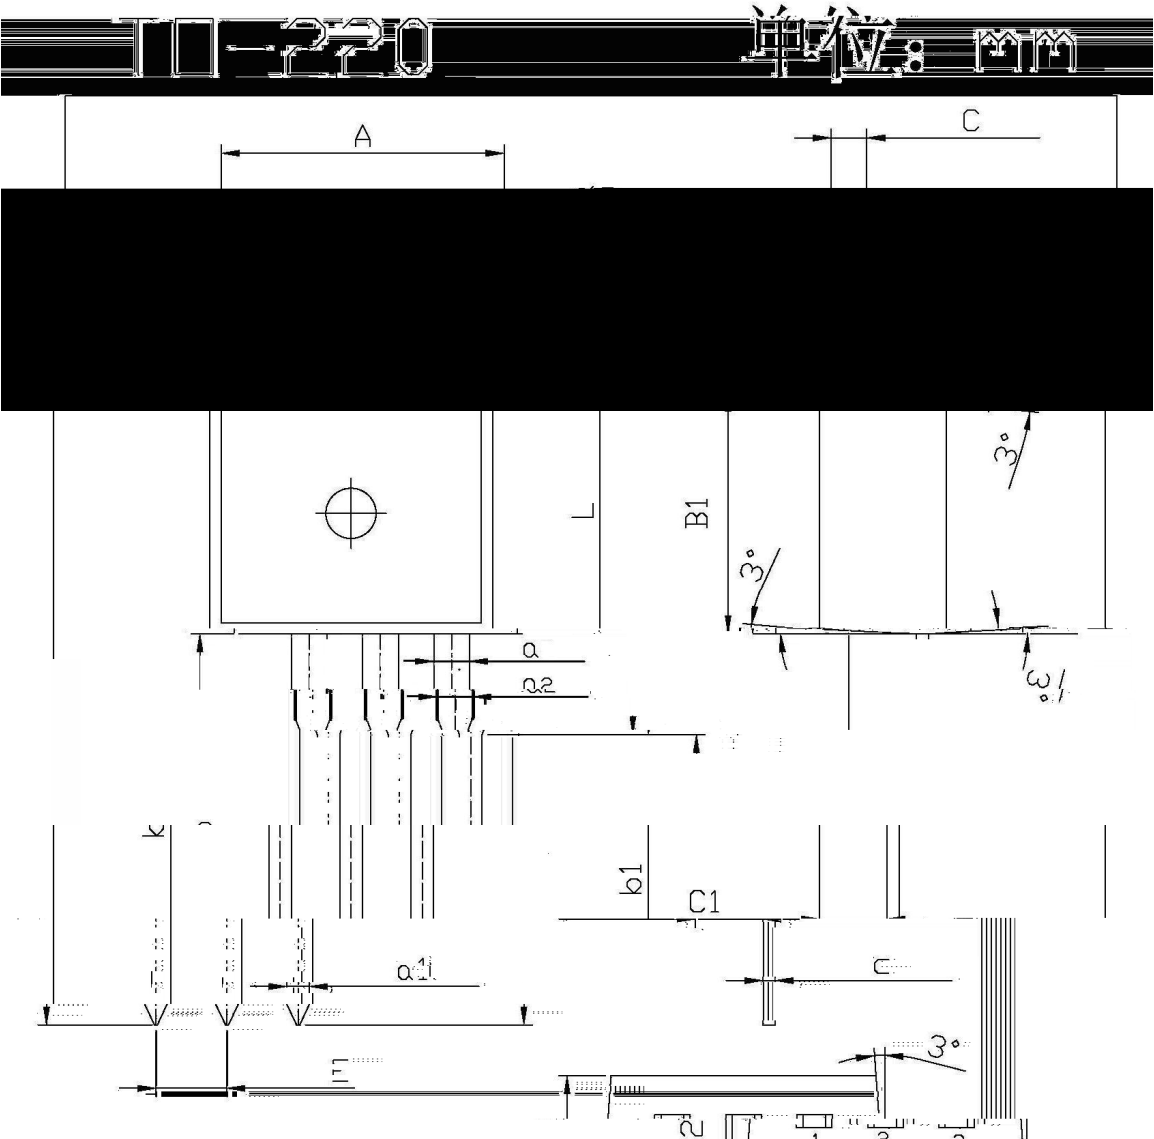


Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters		
	Min	Max		Min	Max	
A	9.8	10.2	C	1.2	1.4	
B	3.56	3.64	B	6.3	6.7	
B1	9.0	9.4		15.7	16.1	
C1	2.2	2.6		12.6	13.0	
a	0.7	0.9		9.5	10.5	
a1	0.4	0.6		1.22	1.32	
b1	7.0	7.7		9.7	10.7	
k	1.45			0.2	0.25	

/ Marking Instructions

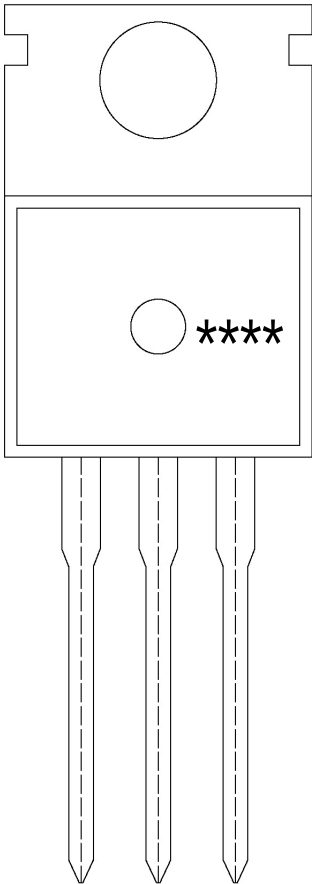

() / Temperature Profile for Dip Soldering(Pb-Free)

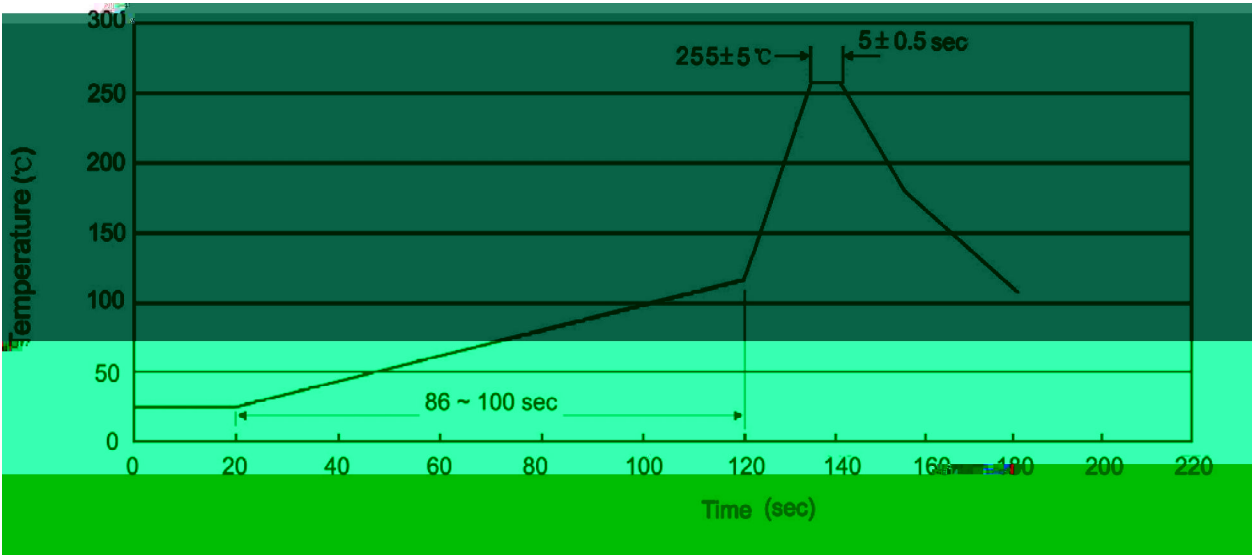

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量			包装尺寸	:
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒		